ELECTRICAL

	UL	IEC
Standard:		
Rated Voltage:	300V	250V
Rated Current:	15A	12A

Contact Resistance: 20mΩ
Withstanding Voltage: AC 2000V for one min
Insulation Resistance: 500MΩ
Wire range: 28-12AWG 2.5mm²

\MECHANICAL

Temp. Range: -40°C ~ +105°C
Steip length: 8-9mm

MATERIAL

Housing: PA66, UL94V-0
Clamp: Phosphor bronze, Tin plated
Wire guard: Stainless steel

ORDER INFORMATION

5	T	M	7	5	0	N	-	W	0	8	E	X	X	G	L	X	-	0	1

- W08: Series No.
- XX: Poles (02-24P)
- G: G:Gray
- X: A:Tray / B:Bag

certified Pb RoHS Compliant

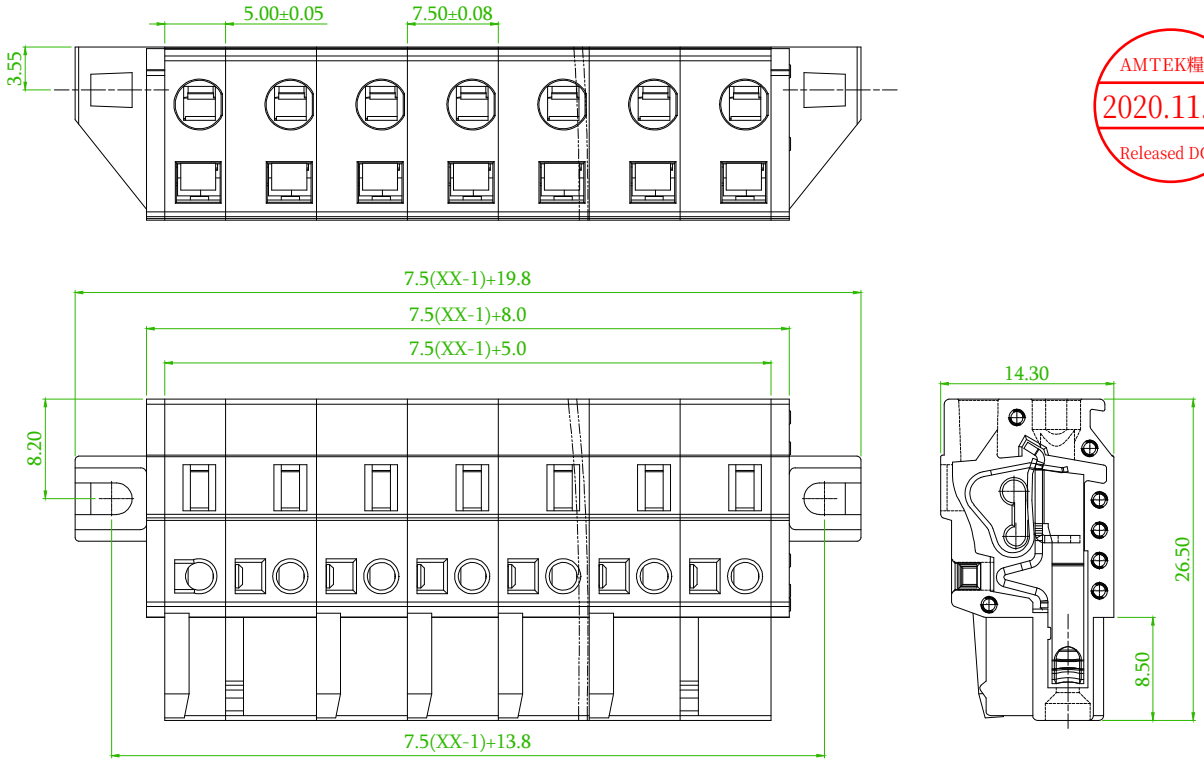

AMTEK糧德
2020.11.11
Released DCC

B

linear dimension(Tolerances Standard GB/T 14486-2008)								—	▱	⊥	
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B x1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/03

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	7.5mm Terminal Block			頁數 Page	1/1
品號 PART NO.	5TM750N-W08EXXGLX-01			繪圖 DRAWN	Eric 2019/01/03
圖號 DRAWING NO.	GN011-EA439	版本 REV.	B	核對 CHECKED	Josh 2019/01/03
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2019/01/03
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION	