

SPECIFICATIONS

CURRENT RATE:3 AMP

INSULATION RESISTANCE:1000M Ω MIN

CONTACT RESISTANCE:30m Ω MAX Δ

DIELECTRIC WITHSTANDING VOLTAGE:500V

AC AT SEA LEVEL Δ

OPERATION TEMPERATURE:-55°C TO +105°C

WIRE APPLICATION: #20-26AWG

INSULATION O.D: 1.5MM MAX

MATERIAL Δ

INSULATOR:PBT

TERMINAL: COPPER ALLOY

SHELL: SPCC

RIVET: COPPER ALLOY


ORDER INFORMATION

5	7	H	D	C	S	X	F	-	X	X	X	X	X	X	X	-	0	1
1:TIN SHELL + L(RoHS)		F:FEMALE		NO. OF CONTACTS		N:NON		N:CLEAR HOLE Ø3.05mm		00:NO PLATING		B:BLACK INSULATOR		A:TRAY				
2:NICKEL SHELL + L(RoHS)								1:REAR RIVET #4-40 H:2.5										
								F:REAR RIVET #4-40 H:4.0										

AMTEK 懌德







2025.01.17

Released DCC

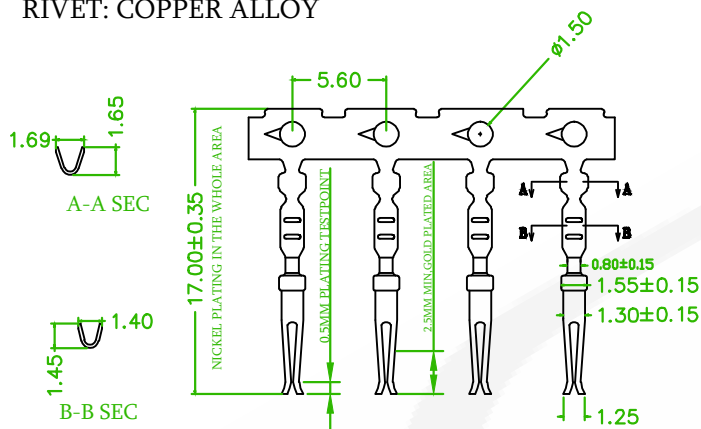

0.76 CRIMP PIN FEMALE TERMINAL

Δ PART No.:32BR-S00F0001

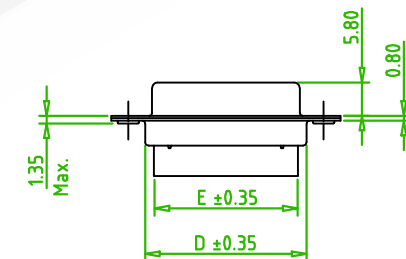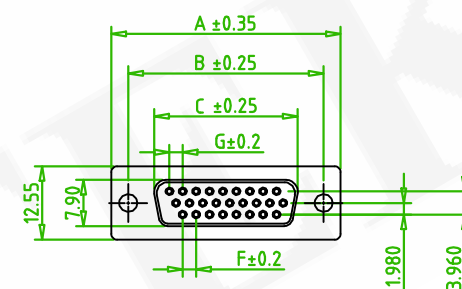

No. of Contact	A	B	C	D	E	F	G
15	30.81	24.99	16.33	19.28	15.50	2.29	1.145
26	39.14	33.32	24.66	27.51	24.40	2.29	1.145
44	53.04	47.04	38.38	41.28	37.80	2.29	1.145
62	69.32	63.50	54.84	57.71	54.00	2.41	1.205

OLD PART NO.:HDBC-FXX-L

Δ	BPM 20250114006 Revise the drawing	Gaby	2025/01/15
Δ	ECN-202412004 Revise the drawing	Gaby	2024/12/30
Δ	EasyFlow202308290001: Revise the drawing	Alice	2023/08/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


懌德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	D-SUB HIGH DENSITY				頁數 Page	1/1
品號 PART NO.	57HDCSXF-XXXXXXXX-01(CN068)				繪圖 DRAWN	Mia 2016/05/30
圖號 DRAWING NO.	GN010-BN536	版本 REV.	F	核對 CHECKED	Wanling 2016/05/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/05/30	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	第三 ANGLE PROJECTION		