

SPECIFICATION

Current Rate:3 AMP

Insulation Resistance:1000 MΩ Min

Dielectric voltage:500V AC for one minute 

Operation Temperature:-55°C to +105 °C

MATERIAL

Insulator:PBT,UL94V-0

Shell: SPCC.

Screw: Copper Alloy or iron.

ORDER INFORMATION


5	7	H	D	C	S	X	M	-	X	X	X	X	0	0	X	X	-	0	1
1: Tin shell + L(RoHS)				M: Male		No. of contacts		N: Non		N: Clear Hole F: Rear Rivet #4-40 H:4.0 I: Rear Rivet #4-40 H:5.8 H: Front Rivet #4-40 H:5.8				B: Black Insulator		A: Tray			
2: Nickel shell + L(RoHS)																			



AMTEK 糧德




2023.09.14

Released DCC

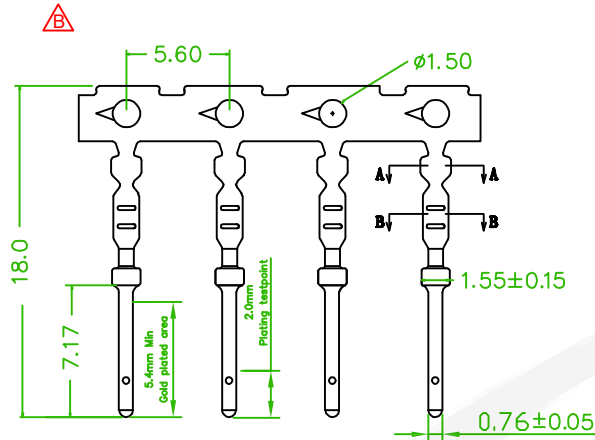

0.76 Crimp Pin Male Terminal

PART No.:32BR-S00M0001

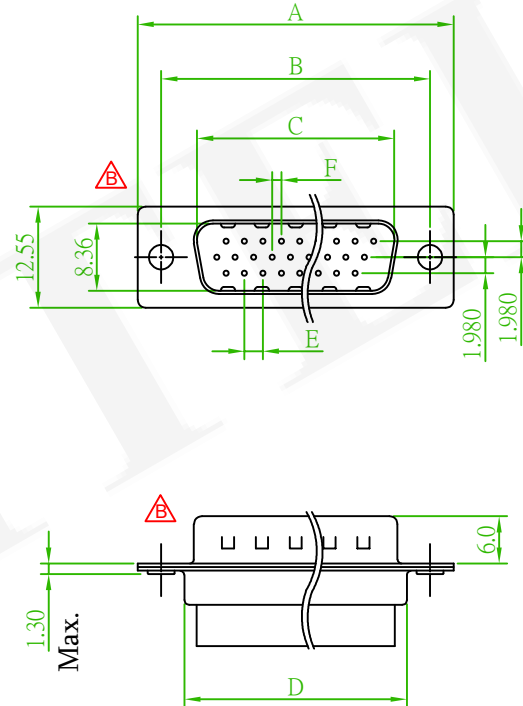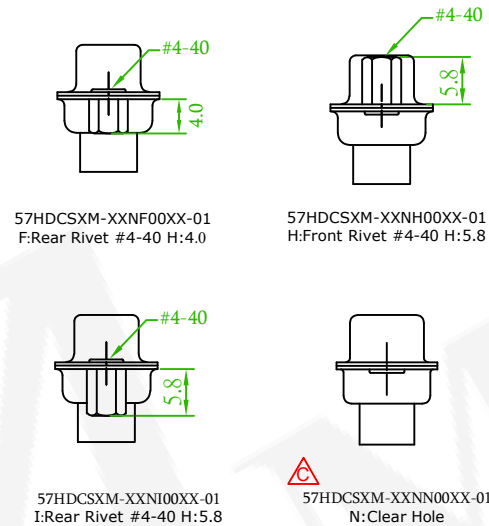

No.	A	B	C	D	E	F
15	30.81	24.99	16.92	19.23	2.29	1.145
26	39.14	33.32	25.25	27.56	2.29	1.145
44	53.04	47.04	38.96	41.28	2.29	1.145
62	69.32	63.50	55.42	57.33	2.41	1.205

Old Part No.:HDBC-MXX-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2268-8036 FAX: 886-2-2268-8035	品名 TITLE	D-SUB HIGH DENSITY CRIMP TYPE				
	品號 PART NO.	57HDCSXM-XXXX00XX-01		繪圖 DRAWN	Jeff 2015/09/08	
	圖號 DRAWING NO.	GW054-AB434		版本 REV.	C	核對 CHECKED John 2015/09/08
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED John 2015/09/08
	公差 TOLERANCE	 .X ± 0.30  .XX ± 0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION 

	Easyflow 2023091401	Benson	2023/09/14
 x9	ECN NO.: 221115 Revise the drawing	Alice	2022/12/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE