

SPECIFICATIONS

CURRENT RATE: 3 AMP

CONTACT RESISTANCE:30mΩ

INSULATION RESISTANCE: 1000MΩ MIN

DIELECTRIC VOLTAGE:500V AC FOR ONE MINUTE

OPERATION TEMPERATURE: -55°C TO +105°C

MATERIAL

INSULATOR: PBT

CONTACT : COPPER ALLOY


SHELL: SPCC

Z-PIECE: FE

SCREW: IRON

RIVET: COPPER ALLOY

ORDER INFORMATION

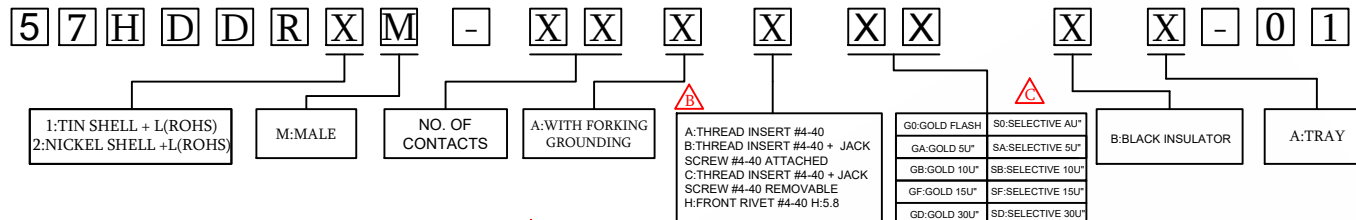


AMTEK 懰德


2025.01.09

Released DCC


No.	A	B	C	E	F	H
15	30.80	24.99	16.92	2.29	1.145	7.04
26	39.20	33.32	25.30	2.29	1.145	6.88
44	53.05	47.04	39.00	2.29	1.145	6.88
62	69.40	63.50	55.42	2.41	1.205	7.00




57HDDR XM-XXAAXXXX-01
THREAD INSERT #4-40

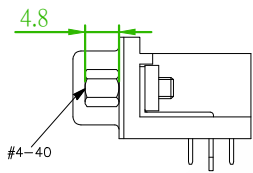


57HDDR XM-XXACXXXX-01
THREAD INSERT #4-40 + JACK
SCREW #4-40 REMOVABLE




57HDDR XM-XXABXXXX-01
THREAD INSERT #4-40 + JACK
SCREW #4-40 ATTACHED




57HDDR XM-XXAHXXXX-01
H:FRONT RIVET #4-40 H:5.8

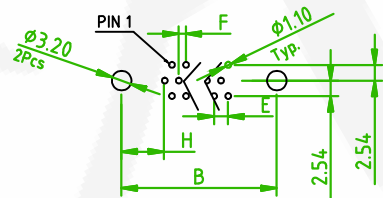



RECOMMENDED PCB LAYOUT
15 POSITION
(PCB TOLERANCE ±0.05)

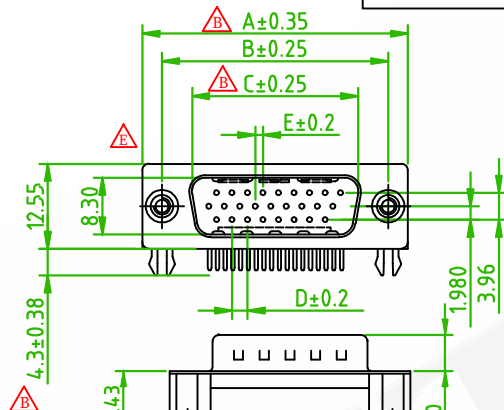

26/44/62 POSITION

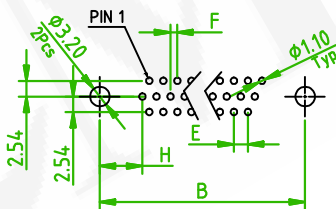

RECOMMENDED PCB LAYOUT
26/44/62 POSITION
(PCB TOLERANCE ±0.05)

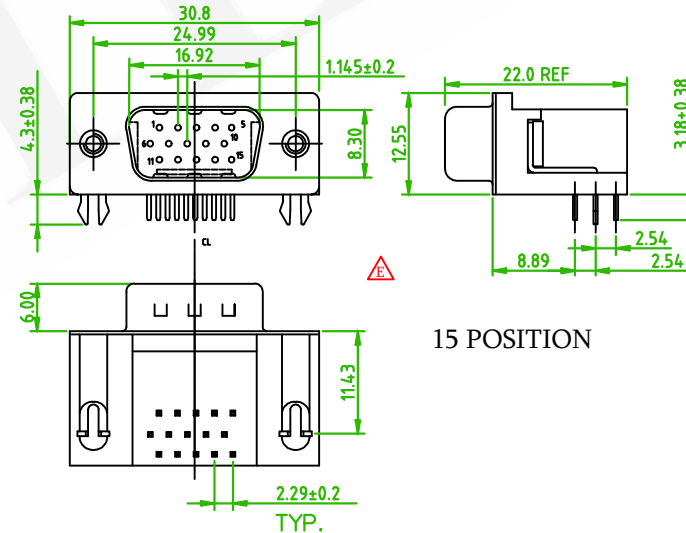

15 POSITION

△	ECN NO.: 240903 Revise the drawing	Gaby	2024/09/04
△	EasyFlow 202403270008 Add the plated options	Benson	2024/03/29
△x1	Add the plated options	Benson	2023/03/02
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK

懰德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	D-SUB HIGH DENSITY MALE TYPE				頁數 Page	1/1
品號 PART NO.	57HDDR XM-XXXXXXX-01(CN068)				繪圖 DRAWN	DAVID 2016/03/17
圖號 DRAWING NO.	GW054-BE240	版本 REV.	E	核對 CHECKED	JOSH 2016/03/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2016/03/17	
公差 TOLERANCE	. X ± 0.35 . XX ± 0.25	單位 UNIT	mm	第三 ANGLE PROJECTION		