





SPECIFICATION 
Current Rating:5 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:30mΩ Max.
Dielectric Voltage:500V AC at sea level.
Operation Temperature:-55°C to +105°C

MATERIAL
Insulator:PBT, UL94V-0
Contact Pin: Copper Alloy
Shell: SPCC
Screw: Iron


ORDER INFORMATION

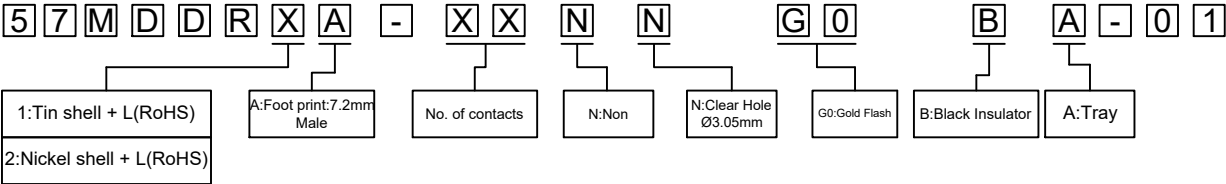

No. of Contact	A	B	C
09	30.80	25.00	16.90
15	39.20	33.30	25.35
25	53.04	47.04	39.00
37	69.40	63.50	55.42

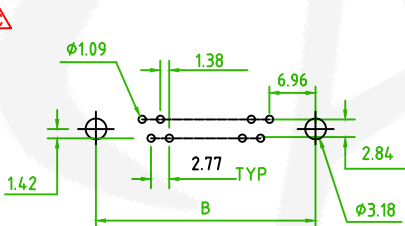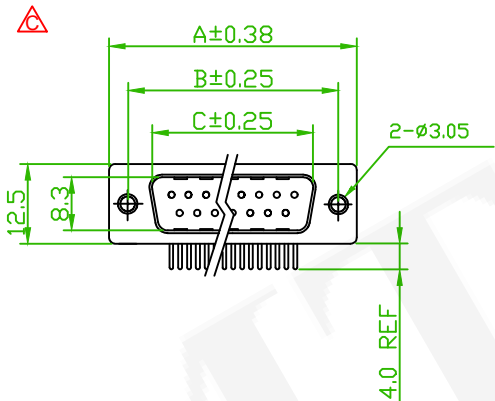

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE±0.05)

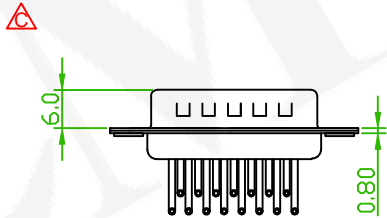

Old Part No.:MDBR1-MXX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 x7	ECN NO.221230 Revise the Drawing	Rex	2023/01/16
	Revise the P/N:57MDDRXXM-XXNAXXBA-01->57MDDRXXA-XXNNXXBA-01	Roy	2017/04/07

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	D-SUB MACHINE PIN RIGHT ANGLE TYPE					
	品號 PART NO.	 57MDDRXXA-XXNNG0BA-01			繪圖 DRAWN	Roy 2016/04/21	
	圖號 DRAWING NO.	GN010-RL650		版本 REV.	C	核對 CHECKED	David 2016/04/21
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	John 2016/04/21
	公差 TOLERANCE	.X ±0.35  .XX ±0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION	
		ANGLES:±2°					