RoHS COMPLIANT

ORDER INFORMATION

5	7	M	D	S	S	X	F	-	X	X	X	X	X	X	X	X	-	0	2

1: TIN SHELL+L(RoHS) 2: NICKEL SHELL+L(RoHS)	F:FEMALE	NO. OF CONTACTS	N:NON TYPE	N: CLEAR HOLE H: FRONT RIVET #4-40, H=5.8 I: REAR RIVET #4-40, H=5.8	G0:GOLD FLASH GA:5U" GB:10U" GC:20U" GD:30U"	W:NATURAL B:BLACK U:BLUE	A:TRAY
					D		

AMTEK糧德
2026.09.14
Released DCC

SPECIFICATIONS B

CURRENT RATING: 5 A C
INSULATION RESISTANCE: 1000MΩ MIN.
CONTACT RESISTANCE: 20mΩ MAX. D
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC AT SEA LEVEL
OPERATION TEMPERATURE: -55°C TO +105°C

MATERIAL

INSULATOR: PBT, UL94V-0
TERMINAL: COPPER ALLOY
SHELL: SPCC
RIVET: COPPER ALLOY

B

No.of Contacts	A	B	C	D
09	30.81	24.99	16.33	19.15
15	39.14	33.32	24.75	27.65
25	53.04	47.04	38.35	41.10
37	69.32	63.50	54.75	57.33

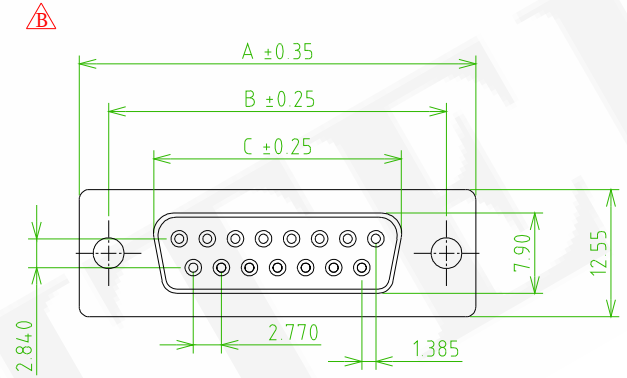



CLEAR HOLE
57MDSSXF-XXNNXXXA-02



FRONT RIVET #4-40, H=5.8
57MDSSXF-XXNHXXXA-02



REAR RIVET #4-40, H=5.8
57MDSSXF-XXNIXXXA-02

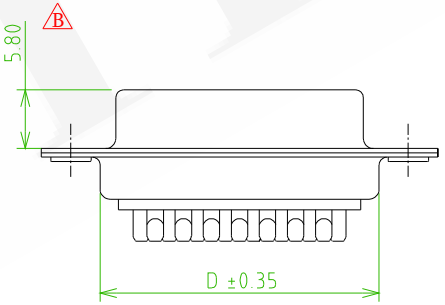



Old P/N: MDBS-FXX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
D	ECN-202609006	Alice	2026/09/10
C	ECN-202504028	Alice	2025/04/28
B x6	ECN NO.221211: Revise the drawing	Rex	2023/01/03

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	D-SUB MACHINE PIN SOLDER TYPE			頁數 Page	1/1
品號 PART NO.	57MDSSXF-XXXXXXXX-02(CN068)			繪圖 DRAWN	Mia 2015/12/02
圖號 DRAWING NO.	GN010-GB052	版本 REV.	D	核對 CHECKED	David 2015/12/02
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/12/02
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25 .XXX ± 0.15 B	單位 UNIT	mm	THIRD ANGLE PROJECTION	