

SPECIFICATIONS

CURRENT RATING: 5 AMP
INSULATION RESISTANCE: 1000MΩ MIN.
CONTACT RESISTANCE: 30mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC AT SEA LEVEL
OPERATION TEMPERATURE: -55°C TO +105°C

MATERIAL

INSULATOR: PBT, UL94V-0
CONTACT PIN: COPPER ALLOY
SCREW: IRON
RIVET: COPPER ALLOY



ORDER INFORMATION

5 7 M D S S X F - X X N X X X X - 0 2

1: TIN SHELL+L(RoHS) 2: NICKEL SHELL+L(RoHS)	F:FEMALE	NO. OF CONTACTS	N: CLEAR HOLE H: FRONT RIVET #4-40, H=5.8 I: REAR RIVET #4-40, H=5.8	G0:GOLD FLASH GA:5U" GB:10U" GC:20U" GD:30U" T0:TIN PLATED TE:TIN 200U"	S0:SELECTIVE SA:5U" SB:10U" SC:20U" SD:30U"	W:NATURAL B:BLACK U:BLUE	A:TRAY
---	----------	-----------------	--	---	---	--------------------------------	--------



No. of Contacts	A	B	C	D
09	30.81	24.99	16.33	19.15
15	39.14	33.32	24.75	27.65
25	53.04	47.04	38.35	41.10
37	69.32	63.50	54.75	57.33

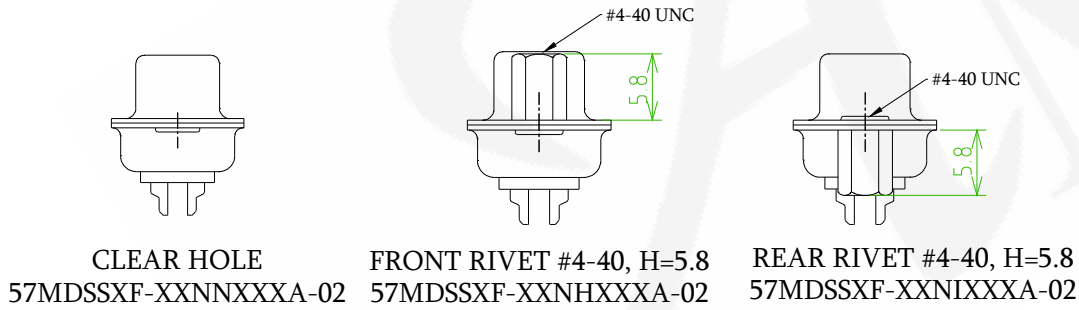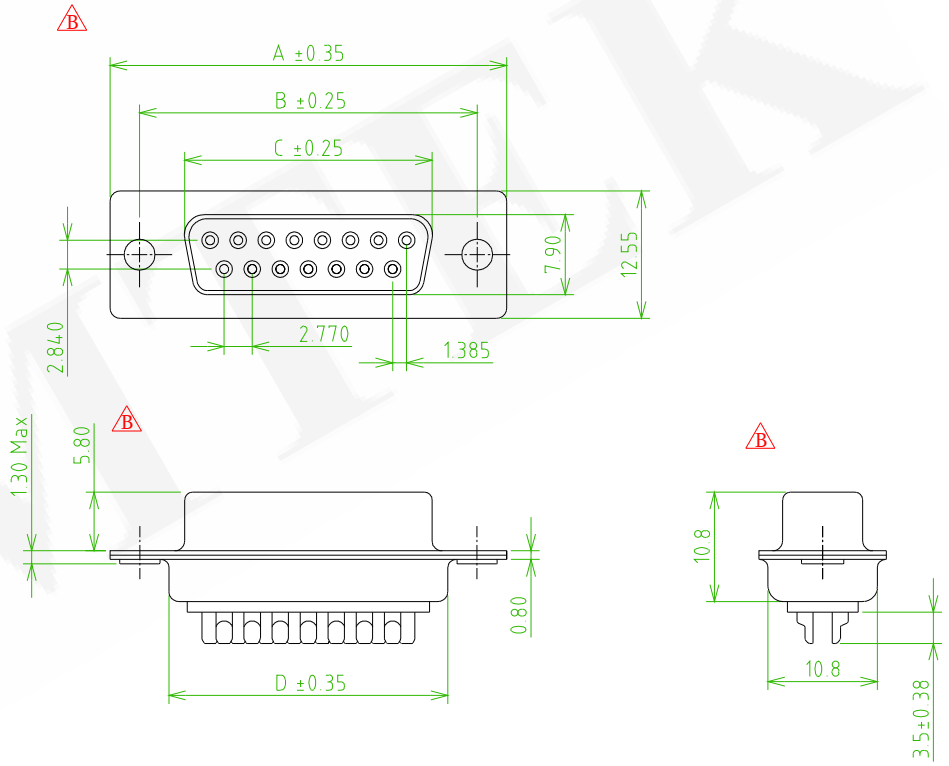

Old P/N: MDBS-FXX-L

△	ECN-202504028	Alice	2025/04/28
△x6	ECN NO.221211: Revise the drawing	Rex	2023/01/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	D-SUB MACHINE PIN SOLDER TYPE				頁數 Page	1/1
	品號 PART NO.	57MDSSXF-XXXXXXX-02(CN068)				繪圖 DRAWN	Mia 2015/12/02
	圖號 DRAWING NO.	GN010-GB052	版本 REV.	C	核對 CHECKED	David 2015/12/02	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/12/02	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25 △	單位 UNIT	mm	第三 ANGLE PROJECTION		