

CURRENT RATING: 3 AMP
INSULATION RESISTANCE: 1000MΩ MIN **5 7**
CONTACT RESISTANCE: 25mΩ MAX.
DIELECTRIC VOLTAGE: 500VAC FOR ONE MINUTE
OPERATION TEMPERATURE: -55 °C TO +85 °C



ORDER INFORMATION

S0:SELECTIVE Au
SF:SELECTIVE 15u"
SD:SELECTIVE 30u"



	B:BLACK
--	---------

SCREW HEIGHT
SEE TABLE




AMTEK糧德
2025.11.26
Released DCC

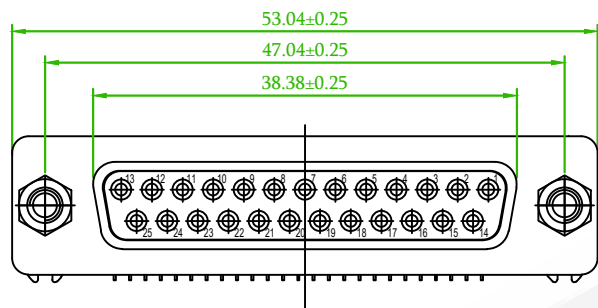


25 PIN

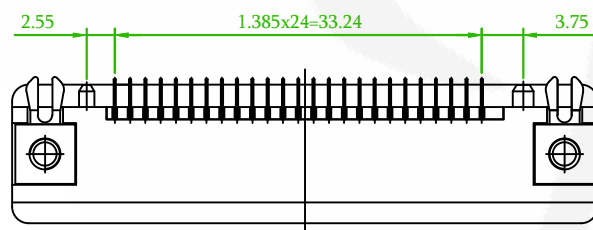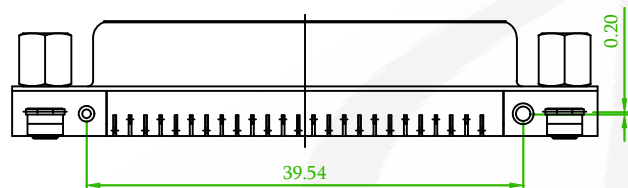


 25 PIN

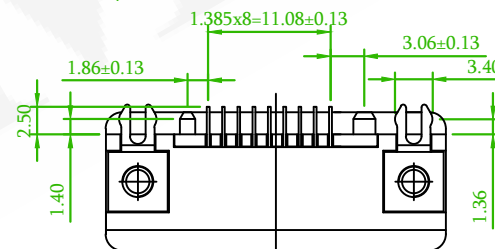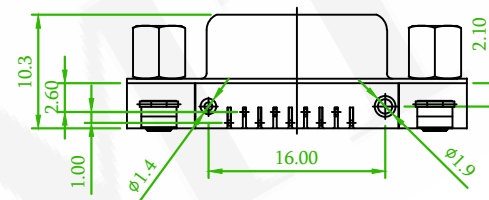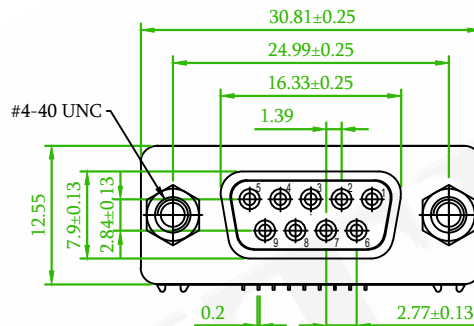

09 PIN



09 PIN


P/N	SCREW HEIGHT
57SDDRXF-XXAAXXBA-01 57SDDRXF-XXAAXXBA-01	WITHOUT SCREW
57SDDRXF-XXABXXBA-01 57SDDRXF-XXACXXBA-01	
57SDDRXF-XXABXXBA-04 57SDDRXF-XXACXXBA-04	

OLD PART NO.:MNDBR-FXX-L



	ECN-202510049	Oliver	2025/11/19
	ECN-240814 REVISE THE DRAWING	Alice	2024/08/22
	EASYFLOW:2024011901	Alice	2024/01/19
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	SLIM D-SUB FEMALE DIP R/A TYPE				頁數 Page	1/2
品號 PART NO.	57SDDRFX-XXXXXXXX-0X(1,4)(TW037)			繪圖 DRAWN	Roy 2016/11/15	
圖號 DRAWING NO.	GW037-RL070		版本 REV.	H	核對 CHECKED	Josh 2018/09/11
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/09/11
公差 TOLERANCE	.XX±0.25 .X°±2°		單位 UNIT	mm	THIRD ANGLE PROJECTION	

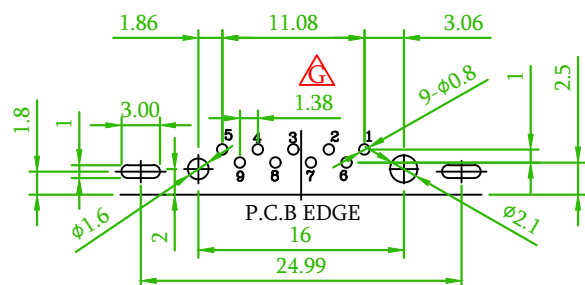

09 PIN

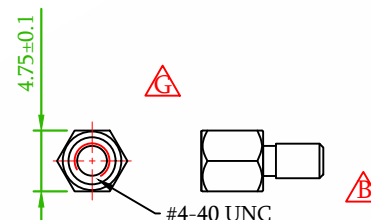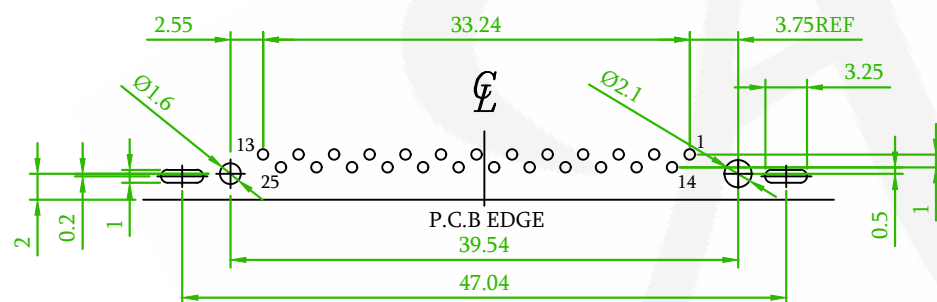THREAD INSERT #4-40
57SDDR XF-XXXAXXXX-01THREAD INSERT #4-40
+ JACK SCREW #4-40 ATTACHED
57SDDR XF-XXXBXXXX-0XTHREAD INSERT #4-40
+ JACK SCREW #4-40 REMOVABLE
57SDDR XF-XXXCXXXX-0X

25 PIN

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

△	ECN-202510049	Oliver	2025/11/19
△	ECN-240814 REVISE THE DRAWING	Alice	2024/08/22
△	EASYFLOW:2024011901	Alice	2024/01/19
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	SLIM D-SUB FEMALE DIP R/A TYPE				頁數 Page	2/2
品號 PART NO.	57SDDR XF-XXXXXXXX-0X(1,4)(TW037)				繪圖 DRAWN	Roy 2016/11/15
圖號 DRAWING NO.	GW037-RL070		版本 REV.	H	核對 CHECKED	Josh 2018/09/11
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/09/11
公差 TOLERANCE	.XX±0.25	.X°±2°	單位 UNIT	mm	THIRD ANGLE PROJECTION	