

ORDER INFORMATION

OPERATION TEMPERATURE: -55°C TO +85°C

SHELL: STEEL

Δ

2:NICKEL SHELL + L(RoHS)

NO. OF CONTACTS
(SEE TABLE)

N:NON

A:THREAD INSERT #4-40
B:THREAD INSERT #4-40 +
JACK SCREW #4-40 ATTACHED


©B:BLACK INSULATOR

©:STANDARD RECOMMEND


©G0:GOLD FLASH

GF:GOLD 15u"





GD:GOLD 30u"

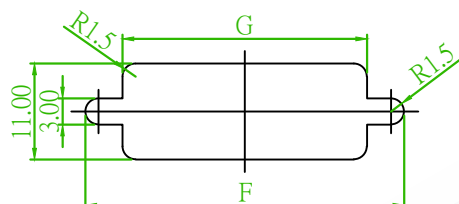

RECOMMENDED PANEL CUT-OUT



PANEL THICKNESS
THICKNESS BETWEEN 1.2~2.0mm

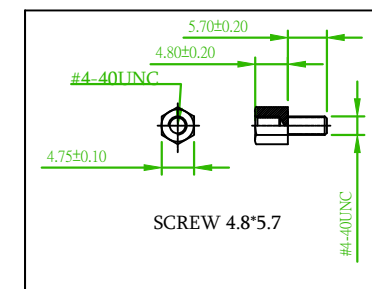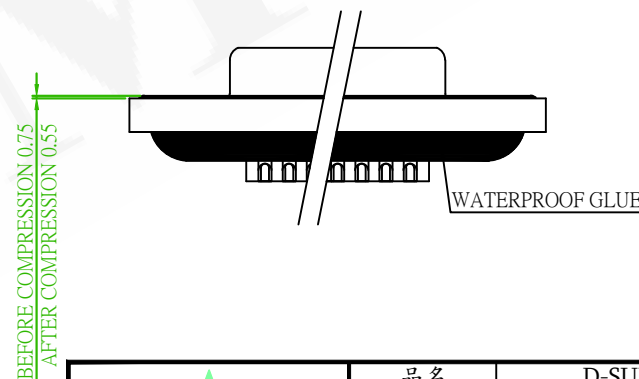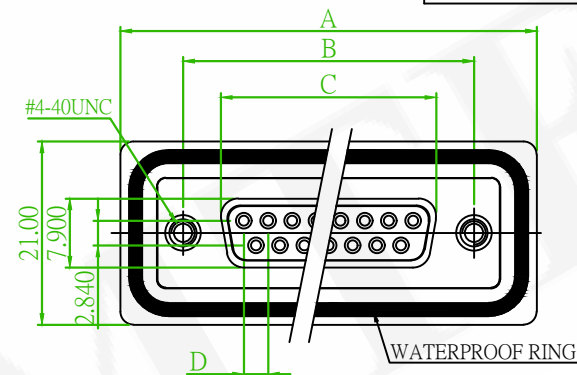

NO.	A ± 0.25	B ± 0.25	C ± 0.13	D ± 0.13	F ± 0.25	G ± 0.25
09	39.40	24.99	16.33	2.77	28.20	20.00
15	47.70	33.32	24.66	2.77	36.50	28.00
25	64.50	47.04	38.38	2.77	51.00	41.50
37	80.95	63.50	54.84	2.77	66.70	58.50

OLD PART NO.:WDBS-FXX-L

	ECN-202510049	Oliver	2025/11/21
 x1	ADD THE PIN OPTION:37	Roy	2017/07/06
	REVISE THE DRAWING	Roy	2017/03/24
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	D-SUB WATER PROOF FEMALE SOLDER TYPE				頁數 Page	1/1
品號 PART NO.	57WDSSXF-XXXXXXXX-01(TW037)			繪圖 DRAWN	Jeff 2015/09/08	
圖號 DRAWING NO.	GW037-RL615	版本 REV.	D	核對 CHECKED	John 2015/09/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/08	
公差 TOLERANCE	.XX±0.25 .X°±2°	單位 UNIT	mm	THIRD ANGLE PROJECTION		

AMTEK 糧德

2025.12.12

Released DCC