

SPECIFICATIONS

CURRENT RATING: 5 AMP
INSULATION RESISTANCE: 5000MΩ MIN
CONTACT RESISTANCE: 10mΩ MAX
DIELECTRIC VOLTAGE:1000V AC FOR ONE MINUTE
OPERATION TEMPERATURE: -55°C TO +85°C

MATERIAL

WATERPROOF RATE:IP 67 MIN
INSULATOR:PBT, UL94V-0
CONTACT:COPPER ALLOY
SHELL: STEEL

ORDER INFORMATION

57WDSX

M

-

XX

X

X

XX

X

XX

-

0

1

2:NICKEL SHELL + L(RoHS)
◎:STANDARD RECOMMEND

NO. OF CONTACTS (37)
N:NON


A:THREAD INSERT #4-40
B:THREAD INSERT #4-40 + JACK SCREW #4-40 ATTACHED

◎B:BLACK INSULATOR


◎G0:GOLD FLASH
GD:GOLD 30u"

A:TRAY

PANEL THICKNESS
THICKNESS BETWEEN1.2~2.0mm

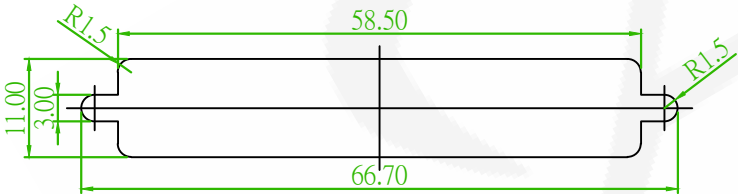

RECOMMENDED PANEL CUT-OUT

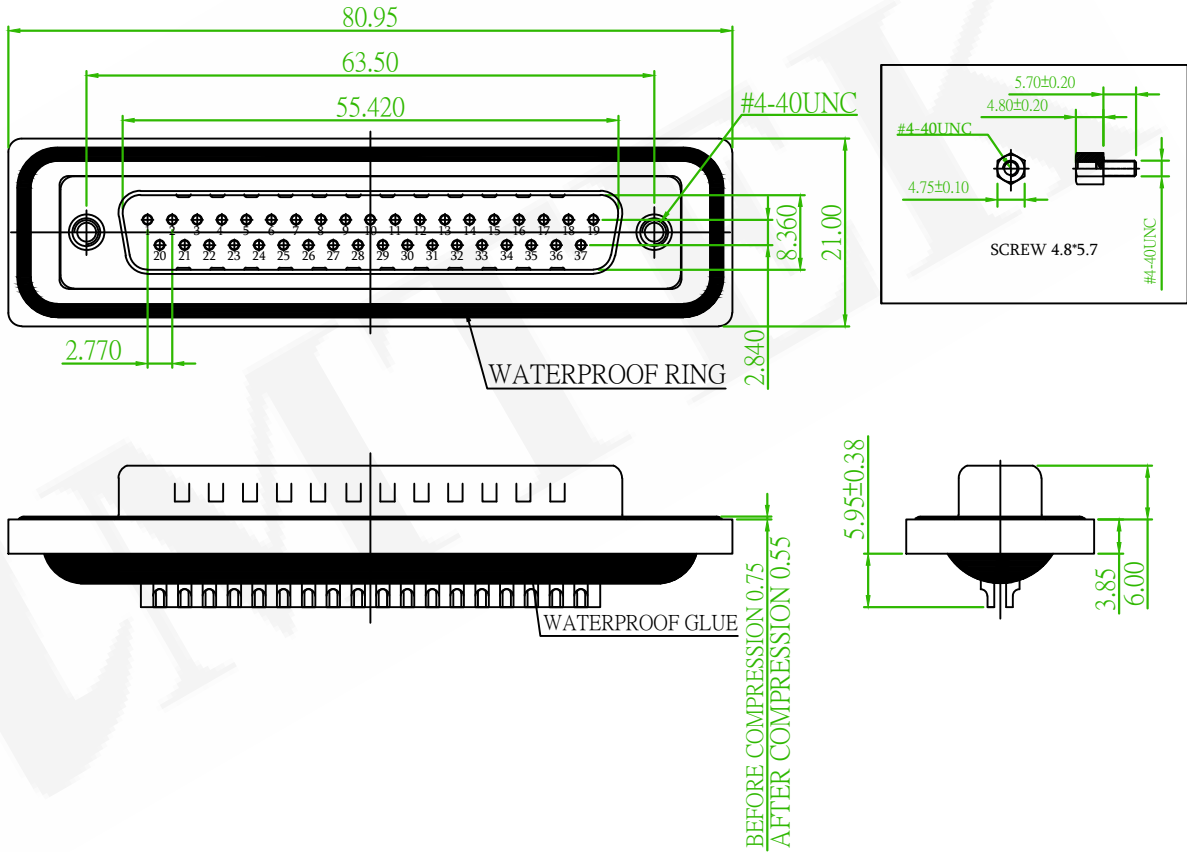

				 懽德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	D-SUB WATER PROOF MALE SOLDER TYPE				頁數 Page	1/1
					品號 PART NO.	57WDSSXM-XXXXXXXX-01(TW037)				繪圖 DRAWN	Roy 2017/07/06
					圖號 DRAWING NO.	GW037-RL845		版本 REV.	B	核對 CHECKED	Carol 2017/07/06
					客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2017/07/06
					公差 TOLERANCE	.XX±0.25 .X°±2°		單位 UNIT	mm	THIRD ANGLE PROJECTION	
	ECN-202510049			Oliver	2025/11/19						
REV.	ECN NO. OR DESCRIPTION			REVISED	DATE						