

SPECIFICATIONS

Current Rating: 5 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 30mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -55°C to +105°C

Waterproof Level: IP67

MATERIAL

Insulator: PBT

Contact : Copper Alloy

Shell: SPCC

Waterproof-Ring: Silicone

Glue: Black Epoxy

Screw: Iron

ORDER INFORMATION

5 7 W H S S X F - X X X

1: Tin shell + L(RoHS)

F: Female

No. of contacts

N: Non Type

A: Thread Insert #4-40

G0: Gold Flash

B: Black

A: Tray


2: Nickel shell + L(RoHS)

B: Thread Insert #4-40 +
Jack Screw #4-40 Attached

C: Thread Insert #4-40
UNC + Jack Screw #4-40
UNC Removable


PIN	A ±0.38	B ±0.38	C ±0.25	D ±0.25
15	39.6	30.80	25.00	16.30
26	48.0	39.20	33.30	24.80
44	61.6	53.04	47.04	38.30
62	78.0	69.40	63.50	54.80

#4-40




57WHSSXM-XXXAXXA-02

Thread Insert #4-40




#4-40




57WHSSXM-XXXBXXA-02

Thread Insert #4-40
+ Jack Screw #4-40 Attached



#4-40



57WHSSXM-XXXCXXA-02
Thread Insert #4-40 UNC + Jack
Screw #4-40 UNC Removable

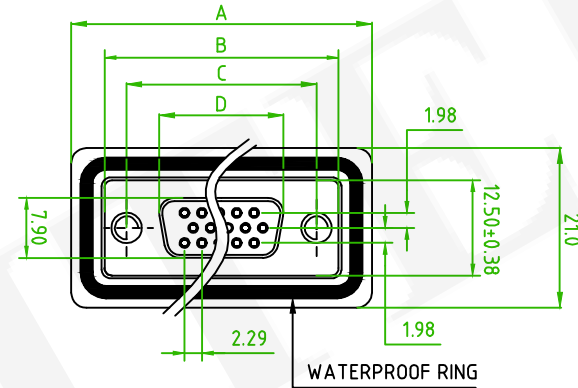

MATING FACE

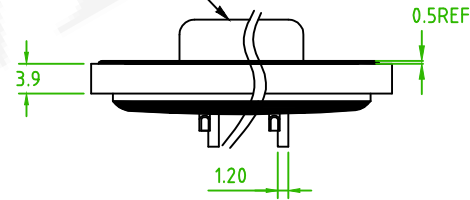


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2268-8036
FAX: 886-2-2268-8035

品名 TITLE	WATERPROOF D-SUB SOLDER TYPE				頁數 Page	1/1
品號 PART NO.	57WHSSXF-XXXXXXXXX-02				繪圖 DRAWN	Alice 2023/06/15
圖號 DRAWING NO.	GW054-AC625	版本 REV.	A	核對 CHECKED	Josh 2023/06/15	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2023/06/15	
公差 TOLERANCE	.X ±0.35 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		