

SPECIFICATIONS

Current Rating: 5 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 30mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -55°C to +105°C

Waterproof Level: IP67

MATERIAL

Insulator: PBT

Contact : Copper Alloy

Shell: SPCC

Waterproof-Ring: Silicone

Glue: Black Epoxy

Screw: Iron

ORDER INFORMATION

5 7 W H S S X M - X X X

1: Tin shell + L(RoHS)

M: Male

No. of contacts

N: Non Type

A: Thread Insert #4-40

G0: Gold Flash

B: Black


A: Tray

2: Nickel shell + L(RoHS)


B: Thread Insert #4-40 +
Jack Screw #4-40 Attached
C: Thread Insert #4-40
UNC +Jack Screw #4-40
UNC Removable

PIN	A ±0.38	B ±0.38	C ±0.25	D ±0.25
15	39.6	30.80	25.00	16.90
26	48.0	39.20	33.30	25.35
44	61.6	53.04	47.04	39.00
62	78.0	69.40	63.50	55.42

#4-40




57WHSSXM-XXXAXXA-02
Thread Insert #4-40






57WHSSXM-XXXBXXA-02
Thread Insert #4-40
+ Jack Screw #4-40 Attached

#4-40



57WHSSXM-XXXCXXA-02
Thread Insert #4-40 UNC +Jack
Screw #4-40 UNC Removable

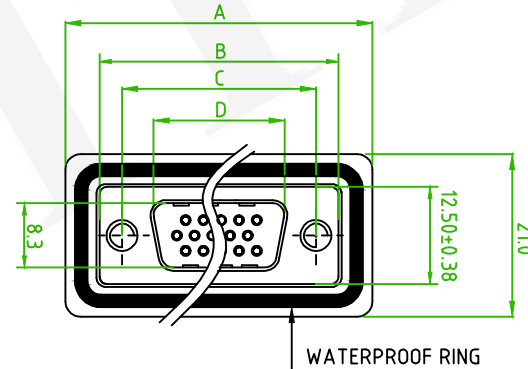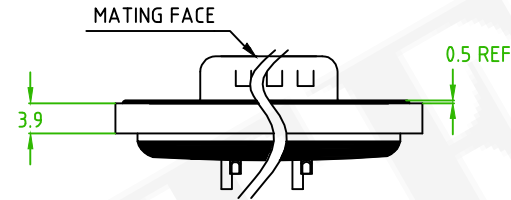

WATERPROOF RING



AMTEK 糧德
2023.06.16
Released DCC



品名 TITLE	WATERPROOF D-SUB SOLDER TYPE				頁數 Page	1/1
品號 PART NO.	57WHSSXM-XXXXXXXX-02				繪圖 DRAWN	Alice 2023/06/15
圖號 DRAWING NO.	GW054-AC624				核對 CHECKED	Josh 2023/06/15
客戶品號 CUSTOMER P/N					承認 APPROVED	Josh 2023/06/15
公差 TOLERANCE	.X ±0.35 .XX ±0.25	版本 REV.	A	比例 SCALE	None	THIRD ANGLE PROJECTION
	單位 UNIT	mm				