

SPECIFICATION

Current Rating: 1 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: PBT+G.F., UL 94V-0

Contact Pin: Copper Alloy

ORDER INFORMATION

5 8 M N D 2

M

-

X X T 0

T

D

X

D:IDC Type

2:W/O LOCK

M:Male+L(RoHS)

No. of Contacts



T0: Tin Plated

T: Tube

1: Red

3: Black

PINS	A	B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
22	31.31	25.4
24	33.85	27.94
26	36.39	30.48

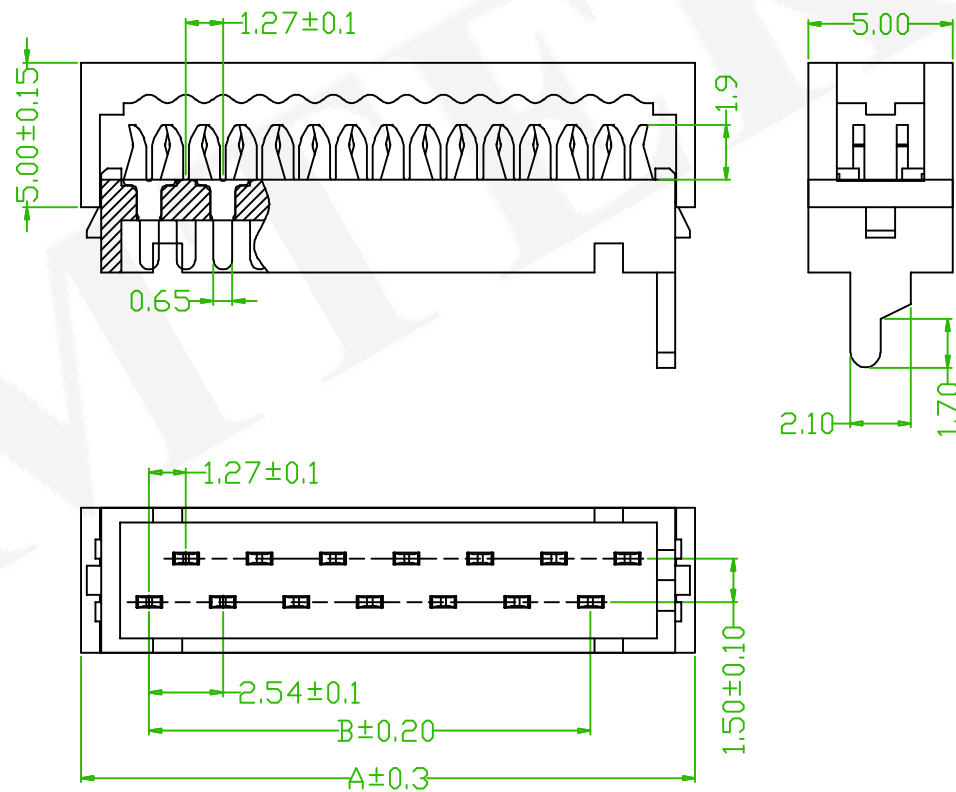

品名 TITLE	MINI MATCH IDC TYPE				繪圖 Page	1/1
品號 PART NO.	B 58MND2M-XXT0TDX			繪圖 DRAWN	Gary 2019/02/22	
圖號 DRAWING NO.	GN046-GB907	版本 REV.	B	核對 CHECKED	Josh 2019/02/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/22	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Bx2	Add the Color	David	2020/06/01