

SPECIFICATION

Current Rating: 1 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute


Operation Temperature: -40°C to +105°C

MATERIAL


Insulator: PBT+G.F., UL 94V-0

Contact Pin: Copper Alloy


ORDER INFORMATION

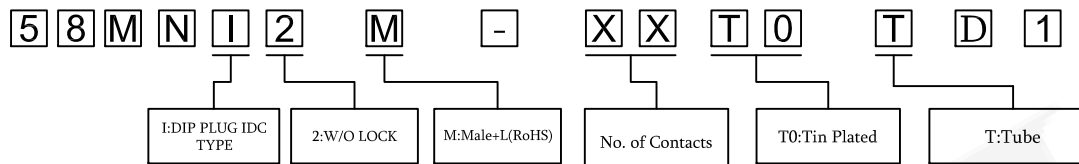

PINS	A	B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
22	31.31	25.4
24	33.85	27.94
26	36.39	30.48

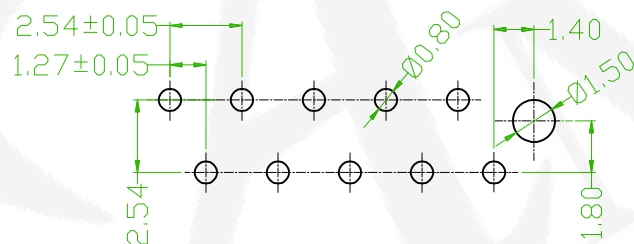

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

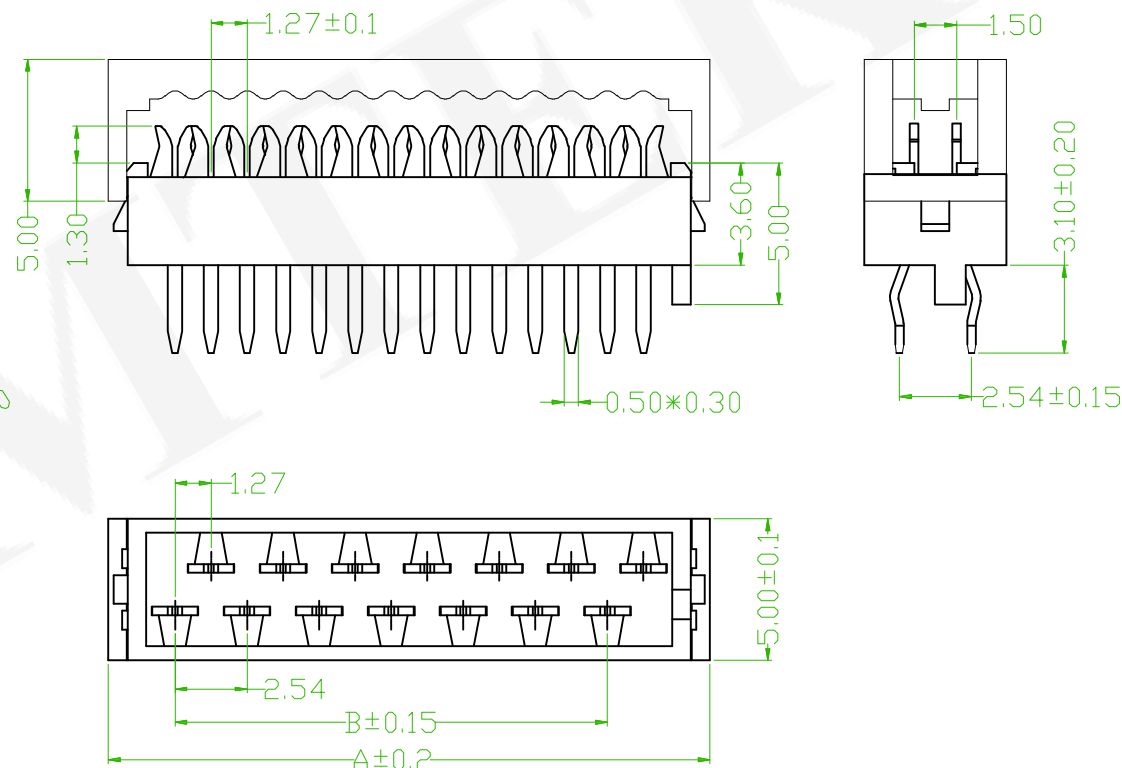

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2268-8036 FAX: 886-2-2268-8035	品名 TITLE	MINI MATCH V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	58MNI2M-XXT0TD1				繪圖 DRAWN	Daneil 2019/02/25
	圖號 DRAWING NO.	GN046-DA010	版本 REV.	A	核對 CHECKED	Josh 2019/02/25	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/25	
	公差 TOLERANCE	.X ±0.20 .XX ±0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		