

SPECIFICATION

Current Rating: 1 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute


Operation Temperature: -40°C to +105°C

MATERIAL




Insulator: Nylon 46., UL 94V-0

Contact Pin: Copper Alloy

ORDER INFORMATION

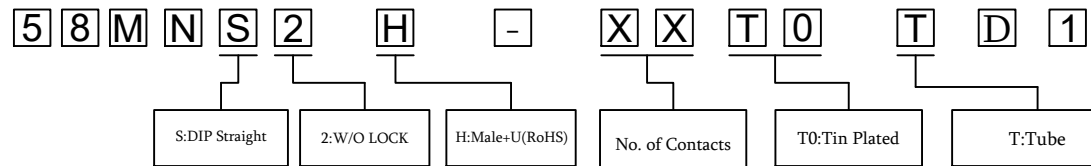

PINS	A	B
4	7.13	2.54
6	9.67	5.08
8	12.21	7.62
10	14.75	10.16
12	17.29	12.70
14	19.83	15.24
16	22.37	17.78
18	24.91	20.32
20	27.45	22.86
22	29.99	25.4
24	32.53	27.94
26	35.07	30.48

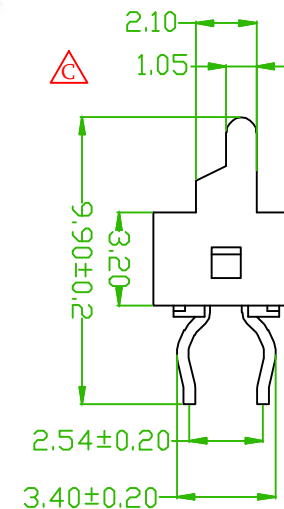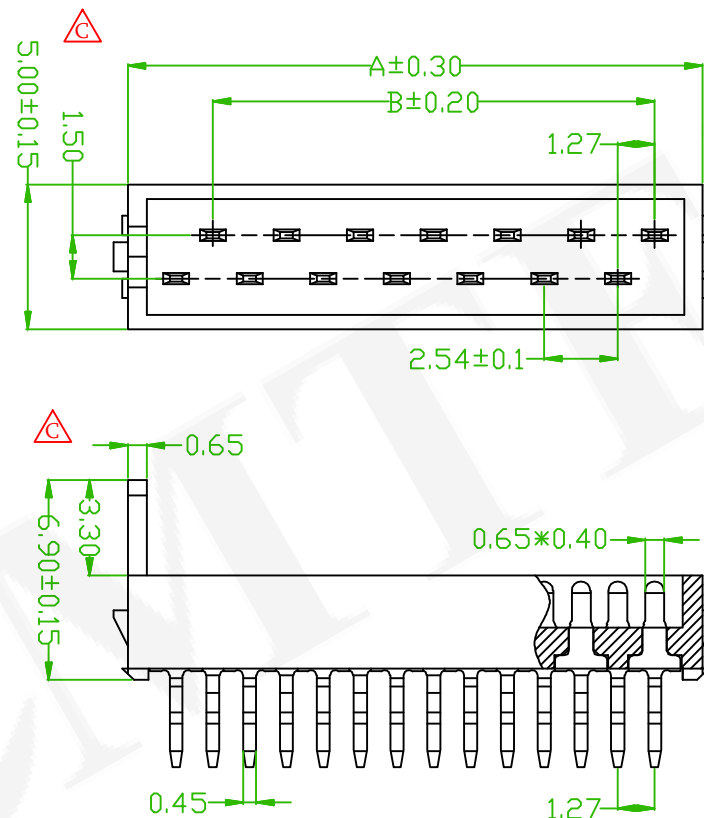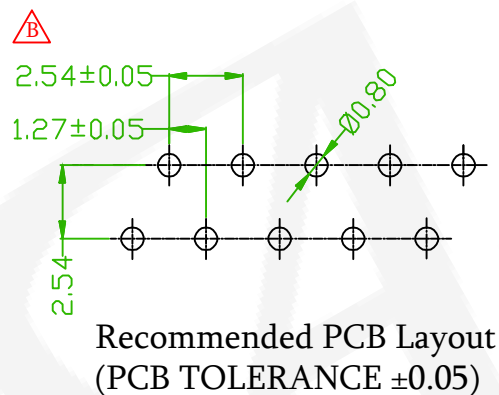

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
$\Delta \times 3$	ECN NO.:220122 Revise the drawing	Alice	2022/02/14
$\Delta \times 1$	QEC 200301:Revise the PCB layout	David	2020/03/09


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2268-8036
FAX: 886-2-2268-8035

品名 TITLE	MINI MATCH V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	58MNS2H-XXT0TD1				繪圖 DRAWN	Daneil 2019/02/25
圖號 DRAWING NO.	GN046-DA019	版本 REV.	C	核對 CHECKED	Josh 2019/02/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/25	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		