

ORDER INFORMATION


5 B B 1 3 S C X X G - X X X X U X - 0 1

SPECIFICATION





CURRENT RATING: 0.5 TO 1.0 AMP
 INSULATION RESISTANCE: 10000MΩ MIN.
 CONTACT RESISTANCE: 25mΩ MAX.
 DIELECTRIC VOLTAGE: 500V AC FOR ONE MINUTE
 OPERATION TEMPERATURE: -55 °C TO +125 °C

MATERIAL

INSULATOR: LCP, BLACK
 CONTACT PIN: PHOSPHOR BRONZE



Male P/N	Female P/N	H
5BB13SC67M-XXXXUH-01	5BB13SC96G-XXXXUH-01	11.4
5BB13SC82P-XXXXUH-01	5BB13SC96G-XXXXUH-01	12.8
5BB13SC82M-XXXXUH-01	5BB13SC96G-XXXXUH-01	12.9
5BB13SC99M-XXXXUH-01	5BB13SC96G-XXXXUH-01	14.5

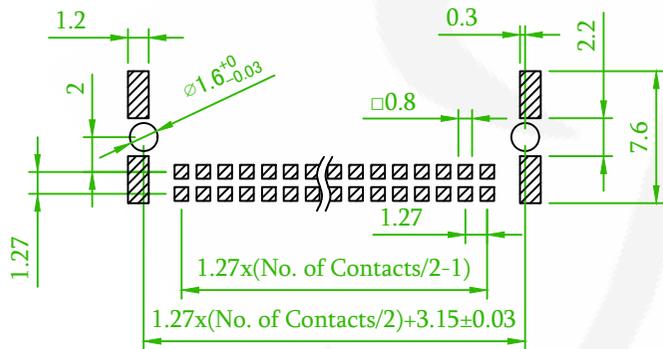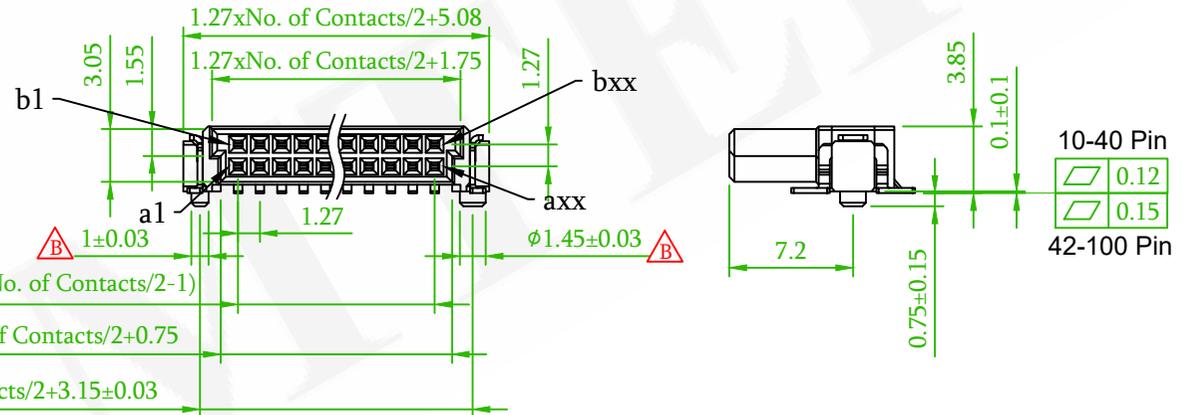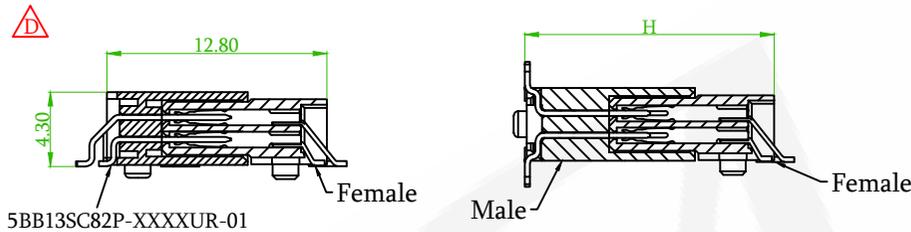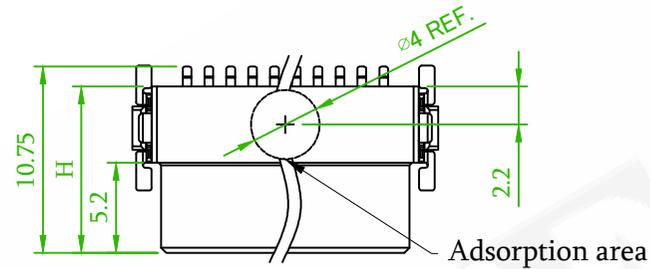

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

<p>懋德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	BOARD TO BOARD 1.27mm FEMALE SMT R/A TYPE				頁數 Page	1/1
	品號 PART NO.	5BB13SCXXG-XXXXUX-01				繪圖 DRAWN	Gary 2018/05/11
	圖號 DRAWING NO.	GN003-GA608	版本 REV.	F	核對 CHECKED	Josh 2018/08/07	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/08/07	
	公差 TOLERANCE	± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

F	ECN-202601027 Revise the drawing	Gaby	2026/02/24
E	QEC NO.:220505 Revise the drawing	Alice	2022/05/16
D	ECN-200110.: Add the M/H	Benson	2020/05/13
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE