

MATERIAL
INSULATOR: NYLON9T, UL94V-0, BLACK
CONTACT PIN: BRASS

ORDER INFORMATION

5

B

H

1

E

S

B

8

8

-

X

X

X

X

X

U

XXXXXX

-

0

0

©:Standard Recommend

NO. OF CONTACTS
(06.08.10.12.14.16
18.20.24.26.30.34
.40.50.60.64)

G0:GOLD FLASH

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0:TIN PLATED

TE:TIN 200u"

S0:SELECTIVE

SA:5u"

SB:10u"

SC:20u"

SD:30u"

5:W/O PEG

6:WITH PEG

T:TUBE, W/O CAP

C:TUBE, WITH CAP

A:TRAY, W/O CAP

P:TRAY, WITH CAP

U:RoHS

+Hi-Temp.


EX:066055

L1:6.6(066)

B:5.5(055)



RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

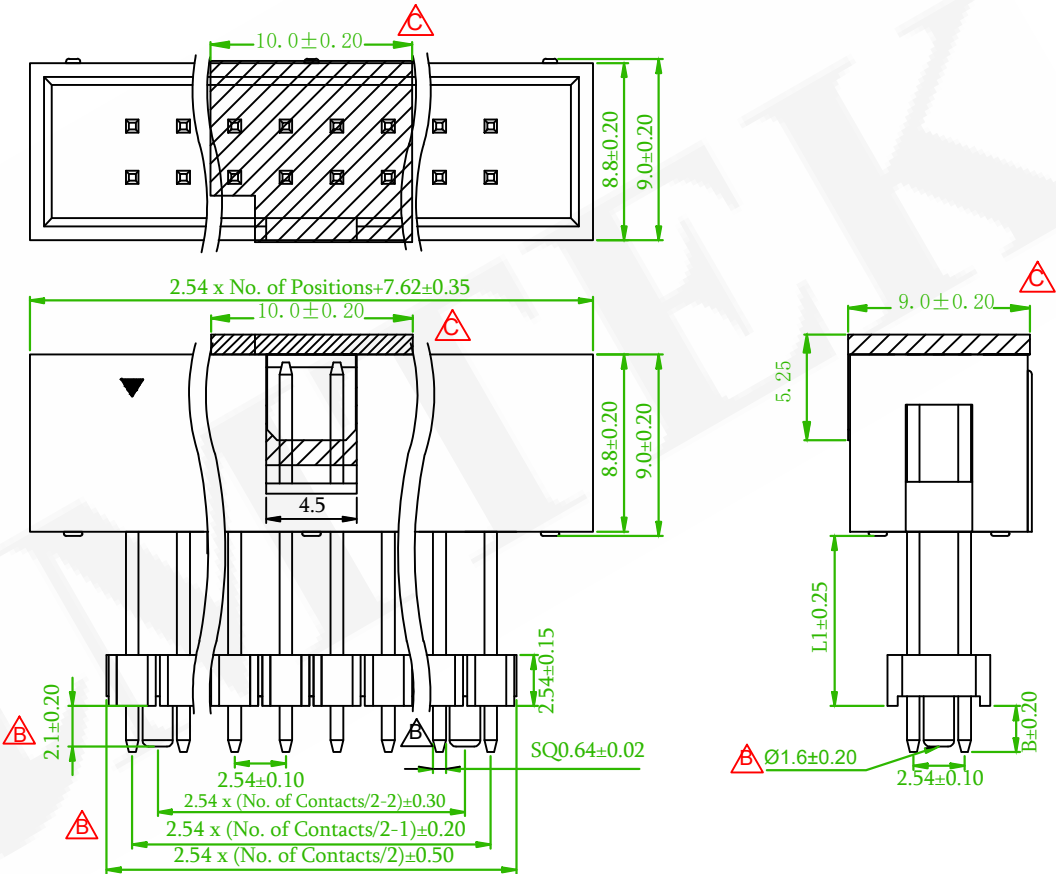

Old Part No.:BH1ES-XX-U

E	ECN 202504015	Willy	2025/04/29
D	ECN NO.:231004 Revise the drawing	Gaby	2023/10/23
C	EasyFlow202308140004:Add the CAP	Alice	2023/08/15
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 懽德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BOX HEADER 2.54mm DIP V/T TYPE				頁數 Page	1/1
	品號 PART NO.	5BH1ESB88-XXXXXXUXXXXXX-00				繪圖 DRAWN	Mia 2016/10/27
	圖號 DRAWING NO.	GN016-MC006	版本 REV.	E	核對 CHECKED	Jonny 2016/10/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/27	
	公差 TOLERANCE	.X ± 0.30 .XX± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		