

MATERIAL

Insulator: PBT, UL94V-0, Black

Contact Pin: Brass 

ORDER INFORMATION

5 B H 1 S D A D 6 - X X X X 5 X L - 0 0

◎:Standard Recommend

Plastic Height
D6=13.6mm

No. of contacts
(06~64)




G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

5:W/O peg

T:Tube, W/O Cap
C:Tube, With Cap
H:Tape & Reel, W/O Cap
R:Tape & Reel, With Cap
◎A:Tray, W/O Cap
P:Tray, With Cap

RoHS

No. of Contacts	DIM A	DIM B	DIM C
10	10.16	18.02	20.32
12	12.70	20.56	22.86
14	15.24	23.10	25.40
16	17.78	25.64	27.94
18	20.32	28.18	30.48
20	22.86	30.72	33.02
22	25.40	33.26	35.56
26	30.48	38.34	40.64
30	35.56	43.42	45.72
34	40.64	48.50	50.80
40	48.26	56.12	58.42
50	60.96	68.82	71.12
60	73.66	81.52	83.82
64	78.74	86.60	88.90

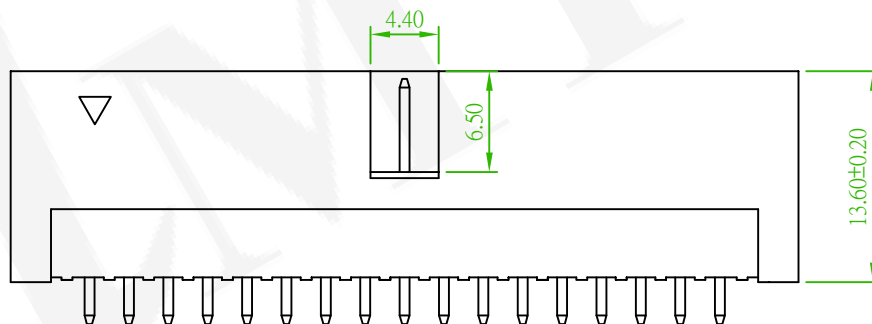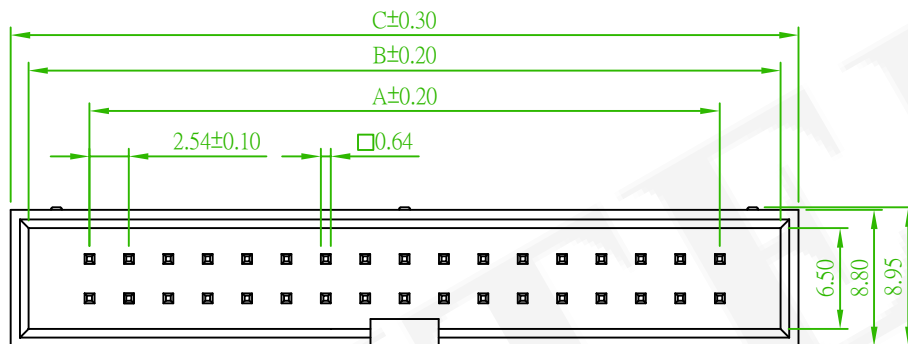

Old Part No.:BH1AS-XX-L



Recommended PCB Layout
(PCB TOLERANCE ±0.05)


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	BOX HEADER 2.54mm 180°				頁數 Page	1/1
品號 PART NO.	5BH1SDAD6-XXXX5XL-00			繪圖 DRAWN	Jeff 2015/09/03	
圖號 DRAWING NO.	GN003-JS049	版本 REV.	B	核對 CHECKED	John 2015/09/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/03	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

ECN NO.:231004 Revise the drawing

Gaby

2023/10/23

ECN NO. OR DESCRIPTION

REVISED

DATE