

MATERIAL 
INSULATOR: NYLON 9T, UL94V-0, BLACK
CONTACT PIN: BRASS

ORDER INFORMATION

5

B

P

3

R

D

A

2

5

-

X

X

X

X

X

X

U

-

0

0

NO. OF PINS TOTAL
10~100P (100P=A1)

G0:GOLD FLASH

S0:SELECTIVE

GA:5u"

SA:5u"

GB:10u"

SB:10u"

GC:20u"

SC:20u"

GD:30u"

SD:30u"

T0:TIN PLATED



TE:TIN 200u"

5:W/O PEG

T:TUBE, W/O CAP

H:TAPE & REEL,W/O CAP

RoHS

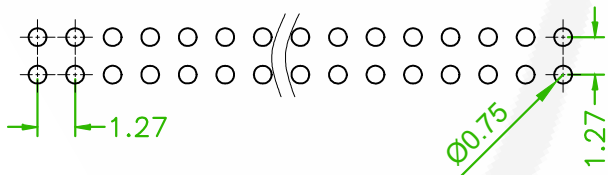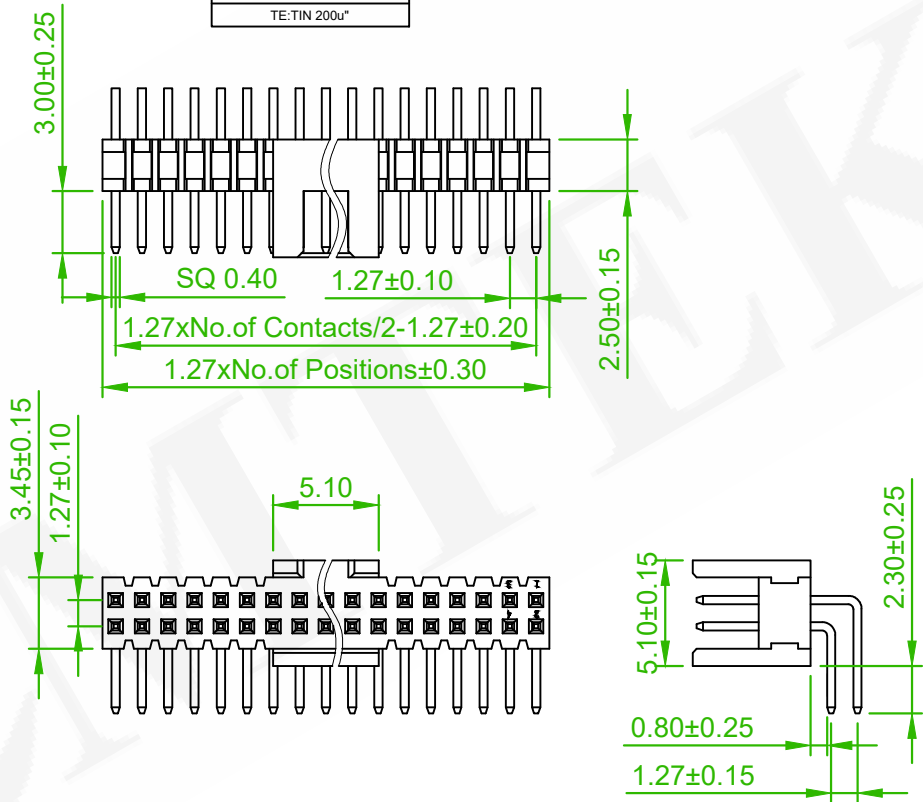

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

Old Part No.:BPH3R-XX-U

	ECN 202505032	Willy	2025/06/04
	ECN NO.:231004 Revise the drawing	Randy	2023/10/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BOX HEADER 1.27mm DIP R/A TYPE				頁數 Page	1/1
	品號 PART NO.	5BP3RDA25-XXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/31
	圖號 DRAWING NO.	GN003-JS069	版本 REV.	C	核對 CHECKED	John 2015/08/31	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/31	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		