

MATERIAL

INSULATOR: NYLON 9T, UL94V-0, BLACK
CONTACT PIN: BRASS

ORDER INFORMATION

5 B P 3 S D A 2 5 - X X X X X U - 0 0

©:STANDARD RECOMMEND

NO. OF PINS TOTAL
(10.14.16.20.24.
26.30.32.34.40.
44.50.60.64.80.
A1=100)

G0:GOLD FLASH		S0:SELECTIVE	
GA:5U"		SA:5U"	
GB:10U"		SB:10U"	
GC:20U"		SC:20U"	
GD:30U"		SD:30U"	
T0:TIN PLATED			
TE:TIN 200U"			

5:W/O PEG




T:TUBE, W/O CAP

RoHS


AMTEK 糧德

2025.10.07

Released DCC

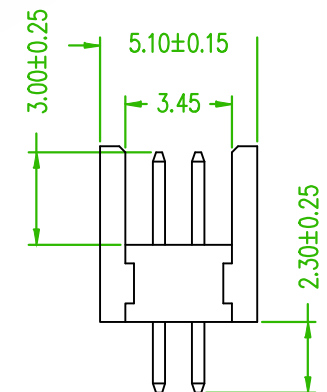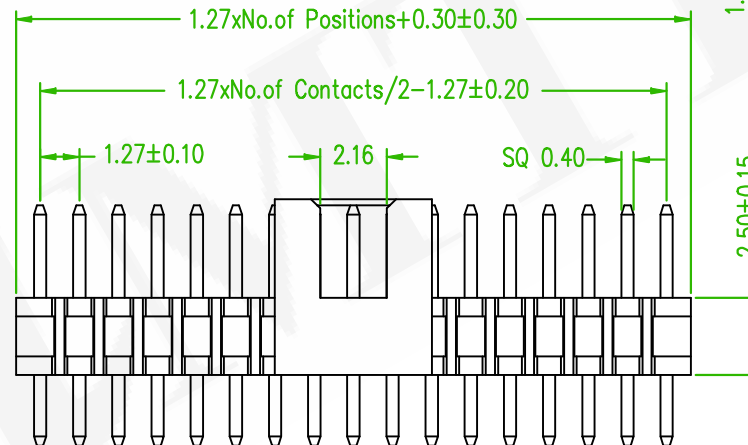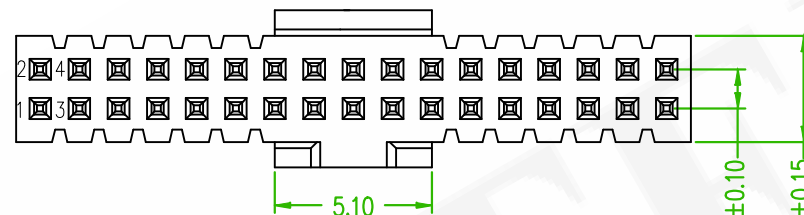

OLD PART NO.:BPH3S-XX-U

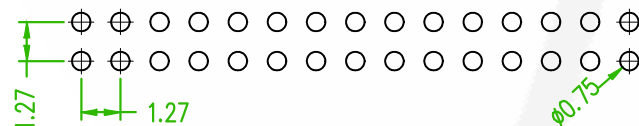

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN-202509005	Oliver	2025/10/07
	ECN NO.:231004 Revise the drawing	Randy	2023/10/23


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		BOX HEADER 1.27mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.		5BP3SDA25-XXXXXXU-00		繪圖 DRAWN	Jeff	2015/08/31	
圖號 DRAWING NO.		GN003-JS070	版本 REV.	C	核對 CHECKED	Josh 2015/08/31	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Josh 2015/08/31	
公差 TOLERANCE		X ± 0.25 .XX ± 0.20	X° $\pm 3^\circ$	單位 UNIT	mm	THIRD ANGLE PROJECTION	