

Released DCC

5EH2SDDNN - XXXX X X U - 00


NO. OF CONTACTS
(06.08.10.12.14.16.
20.24.26.30.34.40
.44.50.60)

G0:GOLD FLASH	S0:SELECTIV
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:TIN PLATED	
TE:TIN 200u"	


1:W/O PEG & LONG EJECTOR
3:W/O PEG & SHORT EJECTOR

RoHS


T:TUBE, W/O CAP






Short Ejector
(L=16.8)



Long Ejector
(L=20.8)



Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

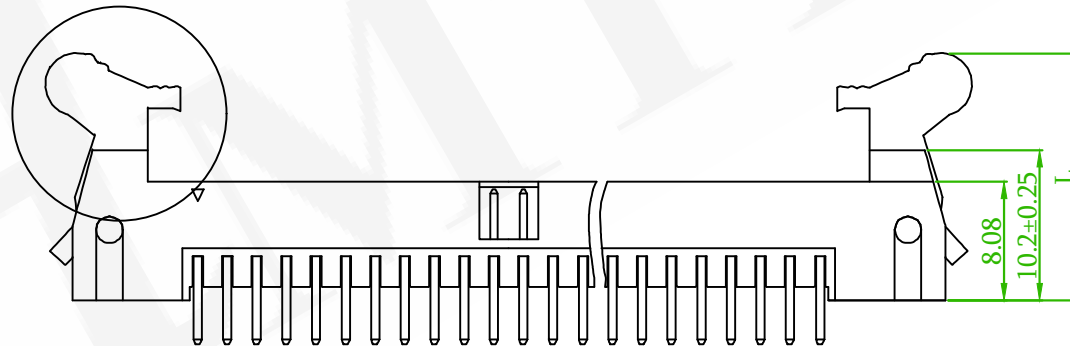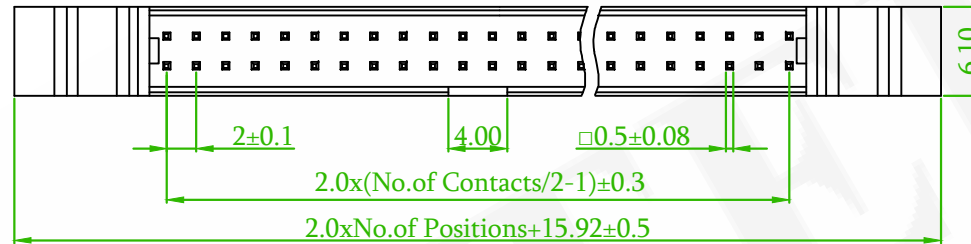

OLD PART NO.:EDH2S-XX-U

	QEC-202412004 Revise the drawing	Gaby	2024/12/18
	ECN NO.:230937 Revise the drawing	Alice	2023/10/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	EJECTOR HEADER DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5EH2SDDNN-XXXXXXU-00			繪圖 DRAWN	Jeff 2017/02/13	
圖號 DRAWING NO.		版本 REV.	C	核對 CHECKED	John 2017/02/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2017/02/13	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		