

INSULATOR: NYLON 9T, UL94V-0, BLACK
CONTACT PIN: BRASS

5 E L 1 M S A N N - X X X X X X U - 0 0

20P OR ABOVE HAS NOTCH DESIGN (SHOWN AS LOCATION E)

NO. OF PINS TOTAL
(06,08,10,14,16,20,26,
30,34,40,50,60,64)





G0:GOLD FLASH	S0:SELECTIVE
GA:5u"	SB:10u"
GB:10u"	SC:20u"
GC:20u"	SD:30u"

1:W/O PEG & LONG EJECTOR (D=14.55mm,H=22.15mm)
3:W/O PEG & SHORT EJECTOR (D=13.67mm,H=18.37mm)

A:TRAY, W/O CAP
T:TUBE, W/O CAP
C:TUBE, WITH CAP
P:TRAY, WITH CAP

RoHS

T0:TIN PLATED
TE:TIN 200u"

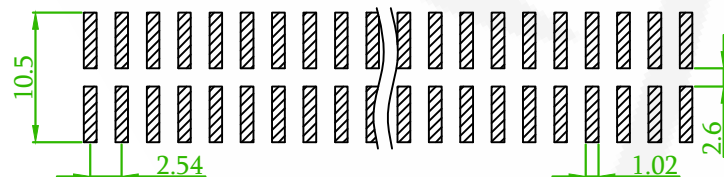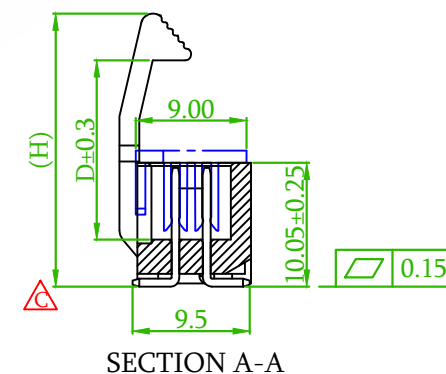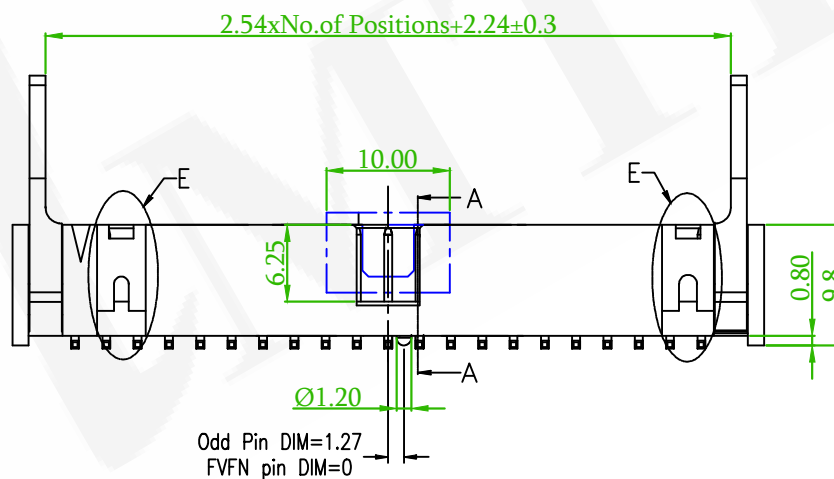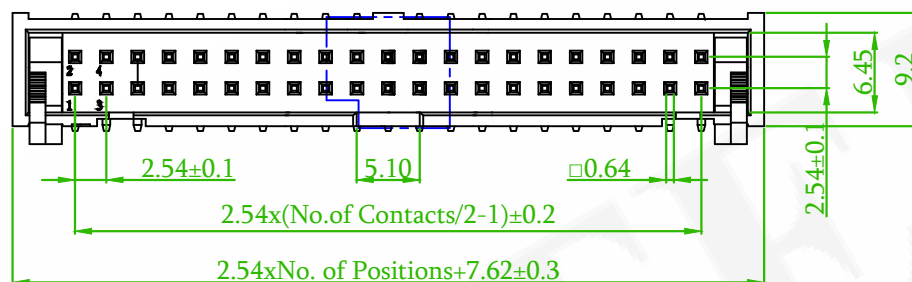

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

OLD PART NO.:EDH1MSL-XX-U

	ECN 202503011	Willy	2025/03/14
	BPM 20250225001 Revise the drawing	Gaby	2025/02/25
	ECN NO.:231003 Revise the drawing	Alice	2023/10/24
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	EJECTOR HEADER 2.54mm SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.	5EL1MSANN-XXXXXXU-00			繪圖 DRAWN	Jeff 2015/09/04	
圖號 DRAWING NO.	GN003-JS031	版本 REV.	D	核對 CHECKED	John 2015/09/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/04	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	