

ORDER INFORMATION

5 H 1 0 0 1 N 0 - 2 X X X X L 0 0 4 0 1

NO. OF CONTACTS
PER ROW

W:NATURAL

B:BAG

SPECIFICATIONS

VOLTAGE RATING: 50V AC,DC

CURRENT RATING: 1A

WITHSTANDING VOLTAGE: 500V AC/MINUTE

CONTACT RESISTANCE: 20mΩ MAX


INSULATION RESISTANCE: 100MΩ MIN

TEMPERATURE RANGE: -40°C TO +85°C △B

MATERIAL

HOUSING: NYLON 66,UL94V-0

Poles	Dimensions (mm)			
	A	B	C	D
04	3.00	5.20	7.00	4.40
05	4.00	6.20	8.00	5.40
06	5.00	7.20	9.00	6.40
08	7.00	9.20	11.00	8.40
10	9.00	11.20	13.00	10.40
12	11.00	13.20	15.00	12.40
15	14.00	16.20	18.00	15.40
20	19.00	21.20	23.00	20.40
25	24.00	26.20	28.00	25.40

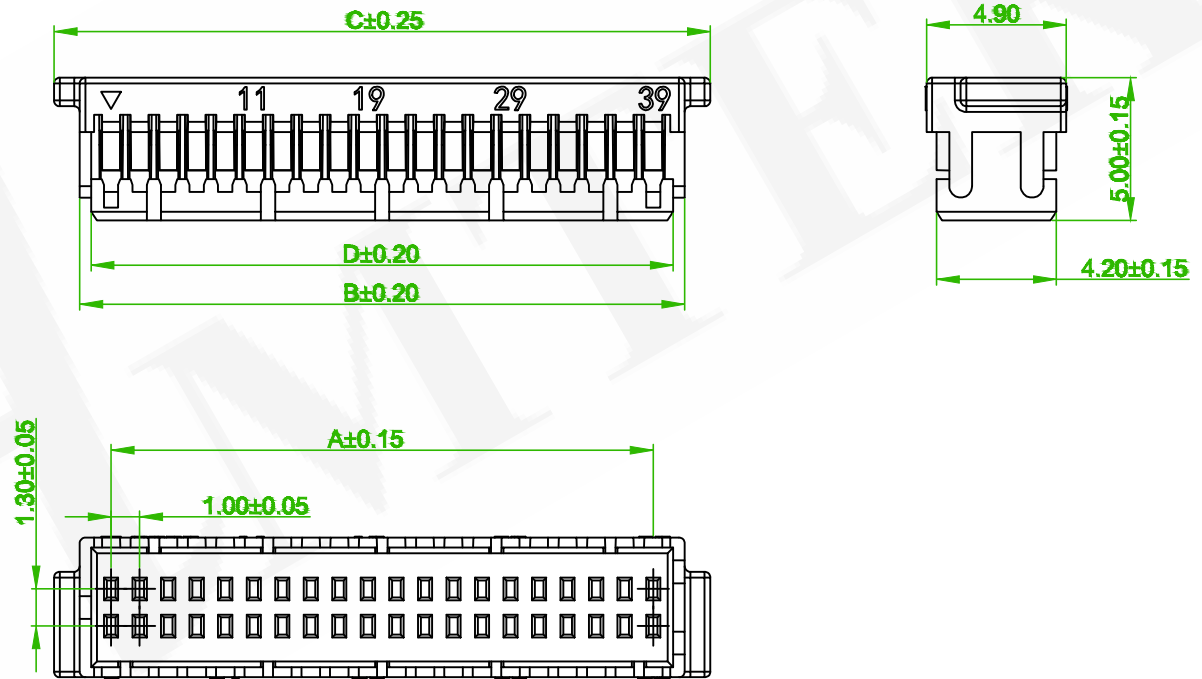

△B	ECN-202609009	Gaby	2026/09/10
△A	BPM 20250711005	Alice	2025/07/14
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 懰德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	HOUSING 1.0mm				頁數 Page	1/1
	品號 PART NO.	5H1001N0-2XXXXL00401				繪圖 DRAWN	Alice 2025/07/14
	圖號 DRAWING NO.	GN211-AA714	版本 REV.	B	核對 CHECKED	Josh 2025/07/14	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2025/07/14	
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		