

SPECIFICATIONS

CURRENT RATING: 1A AC,DC
VOLTAGE RATING: 50V AC,DC
TEMPERATURE RANGE: -25°C TO +85°C
CONTACT RESISTANCE: 20mΩ MAX
INSULATION RESISTANCE: 100MΩ MIN
WITHSTANDING VOLTAGE: 500V AC/MINUTE
MATERIAL:NYLON 66,UL94V-0

ORDER INFORMATION

5H1001N0-2XXXL00A01

PITCH
1.00mm


NO. OF CONTACTS
PER ROW

W:NATURAL

B:BAG

RoHS

Circuit No.	Dimensions		
	A	B	C
2X05P	4.00	8.00	5.35
2X06P	5.00	9.00	6.35
2X08P	7.00	11.00	8.35
2X09P	8.00	12.00	9.35
2X10P	9.00	13.00	10.35
2X15P	14.00	18.00	15.35
2X20P	19.00	23.00	20.35
2X25P	24.00	28.00	25.35

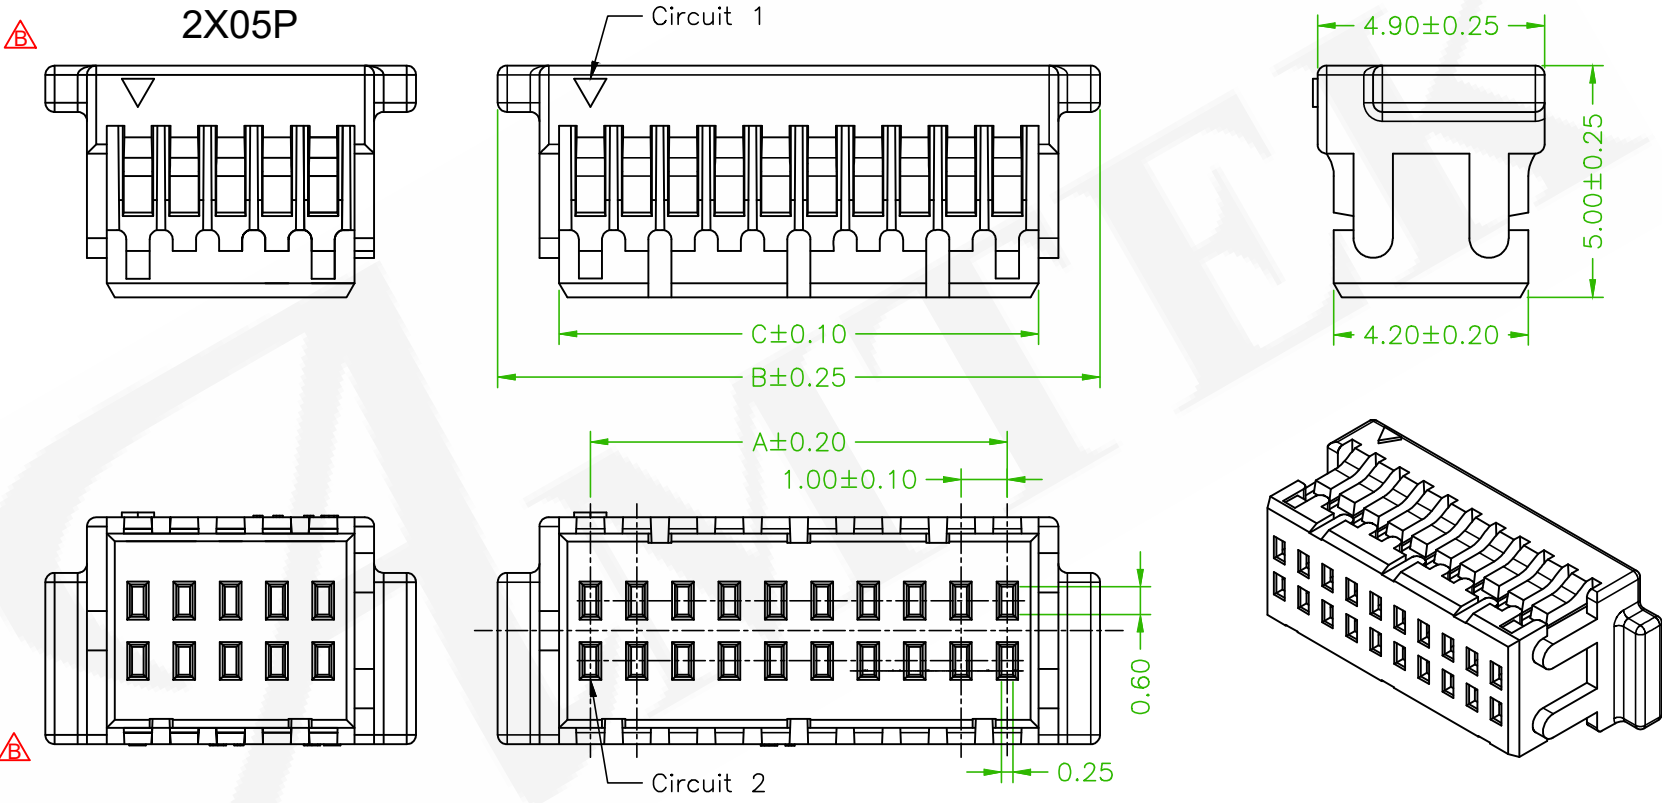

OLD PART NO.:1001H-2XXW-L

				 懌德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE		HOUSING 1.00mm				頁數 Page		1/1	
					品號 PART NO.		5H1001N0-2XXXXL00A01			繪圖 DRAWN		ROY 2016/08/17		
					圖號 DRAWING NO.		GW090-HR281		版本 REV.	B	核對 CHECKED	Boris 2016/08/17		
					客戶品號 CUSTOMER P/N				比例 SCALE	None	承認 APPROVED	Boris 2016/08/17		
					公差 TOLERANCE		 .X ± 0.25 .XX ± 0.15		單位 UNIT	mm	THIRD ANGLE PROJECTION			