

SPECIFICATIONS

CURRENT RATING: 1A AC,DC
VOLTAGE RATING: 50V AC,DC
TEMPERATURE RANGE: -40°C TO +105°C
CONTACT RESISTANCE: 20mΩ MAX
INSULATION RESISTANCE: 100MΩ MIN
WITHSTANDING VOLTAGE: 500V AC/MINUTE
MATERIAL:NYLON 66,UL94V-0

ORDER INFORMATION

△B

5

H

1

0

0

1

N

1

-

1

X

X

X

X

L

0

0

A

0

1

PITCH 1.00MM

1:WITH EAR



NO. OF CONTACTS PER ROW

W:NATURAL

B:BAG PACKAGE

RoHS

Circuit No.	Dimensions			Circuit No.	Dimensions		
	A	B	C		A	B	C
02P	1.00	5.00	2.35	12P	11.00	15.00	12.35
03P	2.00	6.00	3.35	13P	12.00	16.00	13.35
04P	3.00	7.00	4.35	14P	13.00	17.00	14.35
05P	4.00	8.00	5.35	15P	14.00	18.00	15.35
06P	5.00	9.00	6.35	16P	15.00	19.00	16.35
07P	6.00	10.00	7.35	17P	16.00	20.00	17.35
08P	7.00	11.00	8.35	18P	17.00	21.00	18.35
09P	8.00	12.00	9.35	19P	18.00	22.00	19.35
10P	9.00	13.00	10.35	20P	19.00	23.00	20.35
11P	10.00	14.00	11.35	24P	23.00	27.00	24.35

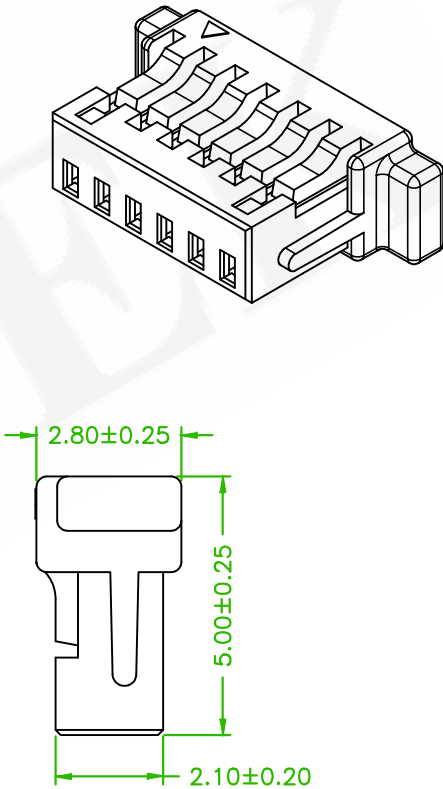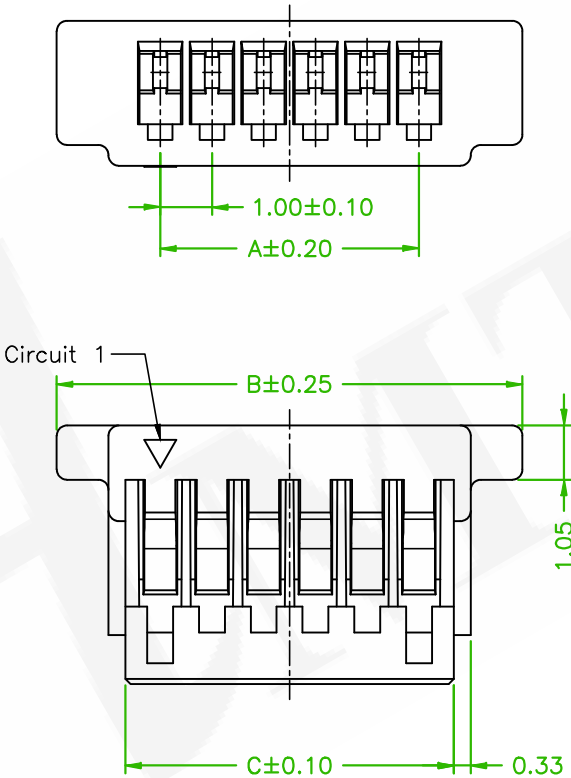

OLD PART NO.:1001H-1XXW1-L

△B	ECN-202509058	Oliver	2025/10/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

懰德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		HOUSING 1.0mm				頁數 Page	1/1
品號 PART NO.		5H1001N1-1XXXXL00A01				繪圖 DRAWN	Roy 2016/08/17
圖號 DRAWING NO.		GW090-0V001	版本 REV.		B	核對 CHECKED	Boris 2016/08/17
客戶品號 CUSTOMER P/N			比例 SCALE		None	承認 APPROVED	Boris 2016/08/17
公差 TOLERANCE		.X ± 0.25 .XX ± 0.15	單位 UNIT		mm	THIRD ANGLE PROJECTION	