

ORDER INFORMATION

SPECIFICATIONS





RATED CURRENT: 1 A AC,DC
 RATED VOLTAGE: 125 V AC,DC
 TEMPERATURE RANGE: -40°C ~ +105°C
 CONTACT RESISTANCE: 20m Ω MAX
 INSULATION RESISTANCE: 1000 MΩ MIN
 DIELECTRIC STRENGTH: 500 V AC, 1 MINUTE

MATERIAL

HOUSING: NYLON 66,UL94V-0

5 H 1 2 5 0 N 0 - 1 X X X X L 0 0 A 0 1

NO. OF CONTACTS PER ROW: X X X X
 W:NATURAL B:BLACK
 B:BAG

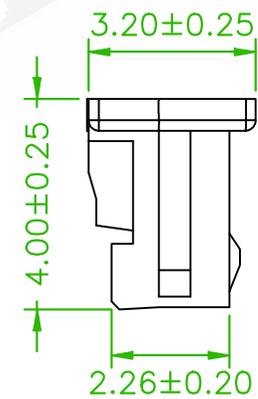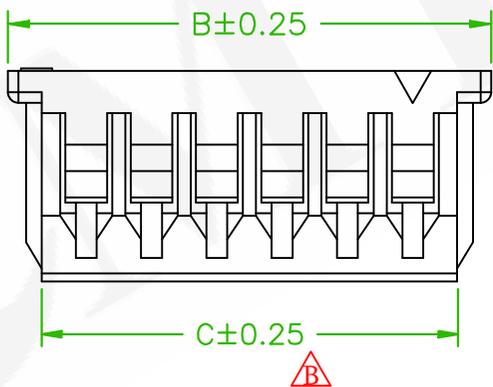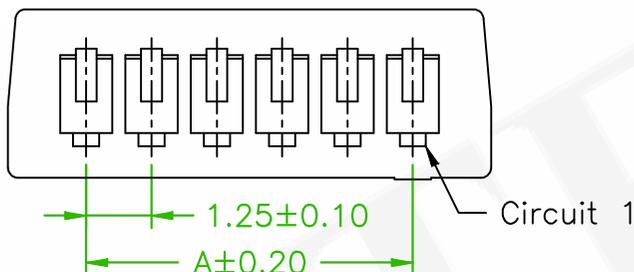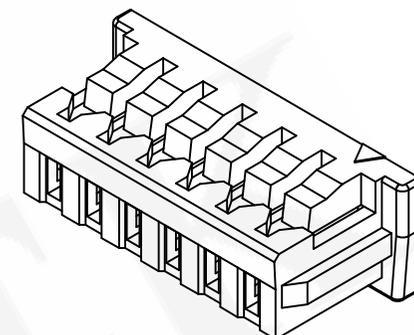

△B

Circuit No.	Dimensions			Circuit No.	Dimensions		
	A	B	C		A	B	C
02P	1.25	4.25	2.95	12P	13.75	16.75	15.45
03P	2.50	5.50	4.20	13P	15.00	18.00	16.70
04P	3.75	6.75	5.45	14P	16.25	19.25	17.95
05P	5.00	8.00	6.70	15P	17.50	20.50	19.20
06P	6.25	9.25	7.95	16P	18.75	21.75	20.45
07P	7.50	10.50	9.20	17P	20.00	23.00	21.70
08P	8.75	11.75	10.45	18P	21.25	24.25	22.95
09P	10.00	13.00	11.70	19P	22.50	25.50	24.20
10P	11.25	14.25	12.95	19P	22.50	25.50	24.20
11P	12.50	15.50	14.20	20P	23.75	26.75	25.45

OLD PART NO.:1250H-XXX-L

 懌德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	HOUSING 1.25mm			頁數 Page	1/1
	品號 PART NO.	5H1250N0-1XXXXL00A01			繪圖 DRAWN	Jeff 2016/10/27
	圖號 DRAWING NO.	GW090-OV150	版本 REV.	B	核對 CHECKED	Jonny 2016/10/27
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/27
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN-202602042	Oliver	2026/03/10
	ECN NO. OR DESCRIPTION	REVISED	DATE

△B