

ORDER INFORMATION

SPECIFICATIONS

CURRENT RATING: 1A AC,DC

VOLTAGE RATING: 150V AC,DC

TEMPERATURE RANGE: -40°C ~ +105°C Δ CONTACT RESISTANCE: 30m Ω MAX Δ INSULATION RESISTANCE: 500M Ω MIN Δ

WITHSTANDING VOLTAGE: 500V AC/MINUTE

MATERIAL

HOUSING: NYLON 66,UL94V-0

5 H 1 2 5 3 N 0 - 1 X X X X L 0 0 A 0 1




NO. OF CONTACTS
PER ROW

W:NATURAL

B:BAG



Circuit No.	Dimensions			Circuit No.	Dimensions		
	A	B	C		A	B	C
02P	1.25	4.25	3.35	11P	12.50	15.50	14.60
03P	2.50	5.50	4.60	12P	13.75	16.75	15.85
04P	3.75	6.75	5.85	13P	15.00	18.00	17.10
05P	5.00	8.00	7.10	14P	16.25	19.25	18.35
06P	6.25	9.25	8.35	15P	17.50	20.50	19.60
07P	7.50	10.50	9.60	20P	23.75	26.75	25.85
08P	8.75	11.75	10.85	21P	25.00	28.00	27.10
09P	10.00	13.00	12.10	25P	30.00	33.00	32.10
10P	11.25	14.25	13.35	30P	36.25	39.25	38.35

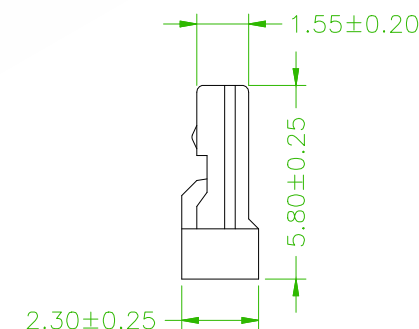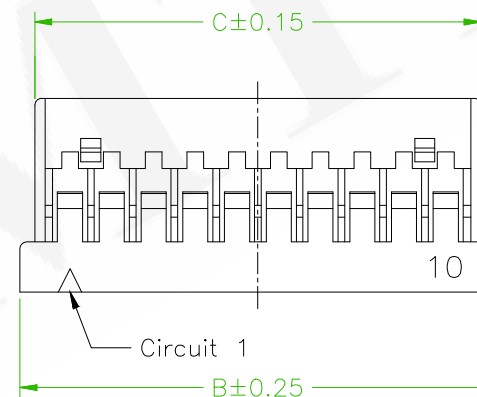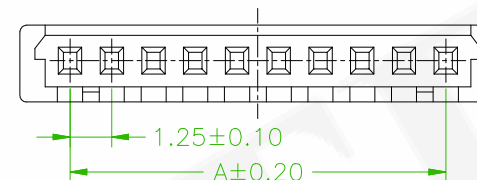

OLD PART NO.:1253H-XXW-L

Δ	ECN-202608015	Gaby	2026/08/17
Δ	ECN No.:170908, Revised the Color	Kilin	2017/09/07
Δ	Revise the drawing and Voltage Rating: 100V→150V,Contact Resistance: 20m Ω Max→30m Ω Max and TOLERANCE .X±0.35 .XX±0.25→.X±0.25 .XX±0.15	Eloise	2017/01/24
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



懰德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		Housing 1.25mm				頁數 Page	1/1
品號 PART NO.		5H1253N0-1XXXXL00A01				繪圖 DRAWN	Eloise 2017/01/24
圖號 DRAWING NO.		GW090-EL097	版本 REV.	D	核對 CHECKED	Jonny 2017/01/24	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2017/01/24	
公差 TOLERANCE		.X ±0.25 .XX ±0.15 Δ	單位 UNIT	mm	THIRD ANGLE PROJECTION		