


# ORDER INFORMATION

## SPECIFICATIONS

RATED CURRENT: 1 A AC,DC  
 RATED VOLTAGE: 125 V AC,DC  
 TEMPERATURE RANGE: -40°C ~ +105°C  
 CONTACT RESISTANCE: 20m Ω MAX  
 INSULATION RESISTANCE: 100 MΩ MIN  
 DIELECTRIC STRENGTH: 500V AC, 1 MINUTE





5 H 1 2 5 4 N 0 - 1 X X X X L 0 0 A 0 1



## MATERIAL

HOUSING: NYLON 66,UL94V-0

NO. OF CONTACTS	Dimensions		
	A	B	C
02P	1.25	2.72	5.72
03P	2.50	3.97	6.97
04P	3.75	5.22	8.22
05P	5.00	6.47	9.47
06P	6.25	7.72	10.72
07P	7.50	8.97	11.97
08P	8.75	10.22	13.22
09P	10.00	11.47	14.47
10P	11.25	12.72	15.72
11P	12.50	13.97	16.97
12P	13.75	15.22	18.22
14P	16.25	17.72	20.72
15P	17.50	18.97	21.97
16P	18.75	20.22	23.22
20P	23.75	25.22	28.22
30P	36.25	37.72	40.72

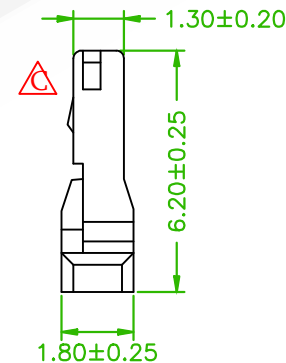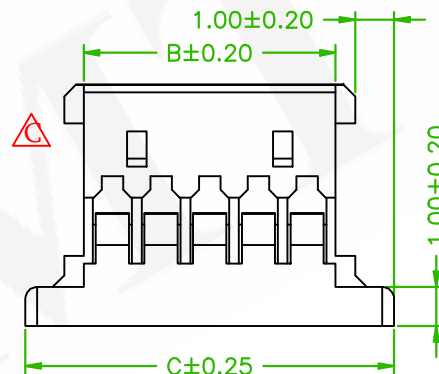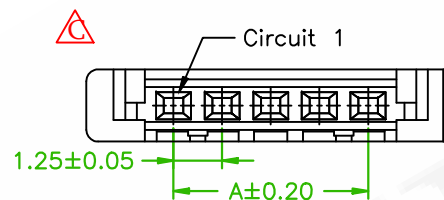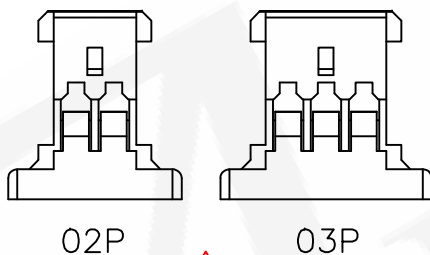

OLD PART NO.:1254H-XXW-L

△	ECN-202605015	Oliver	2026/05/18
△x1	ECN NO.:170908, REVISED THE COLOR	Kilin	2017/09/07
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	HOUSING 1.25mm			頁數 Page	1/1
	品號 PART NO.	5H1254N0-1XXXXL00A01			繪圖 DRAWN	Roy 2016/08/10
	圖號 DRAWING NO.	GW090-KL034	版本 REV.	C	核對 CHECKED	Boris 2016/08/10
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/10
	公差 TOLERANCE	△.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	