







ORDER INFORMATION

SPECIFICATIONS

CURRENT RATING: 1A AC,DC
 VOLTAGE RATING: 100V AC,DC
 TEMPERATURE RANGE: -40°C ~ +105°C Δ
 CONTACT RESISTANCE: 20m Ω MAX
 INSULATION RESISTANCE: 500M Ω MIN
 WITHSTANDING VOLTAGE: 500V AC/MINUTE
 MATERIAL: NYLON 66,UL94V-0

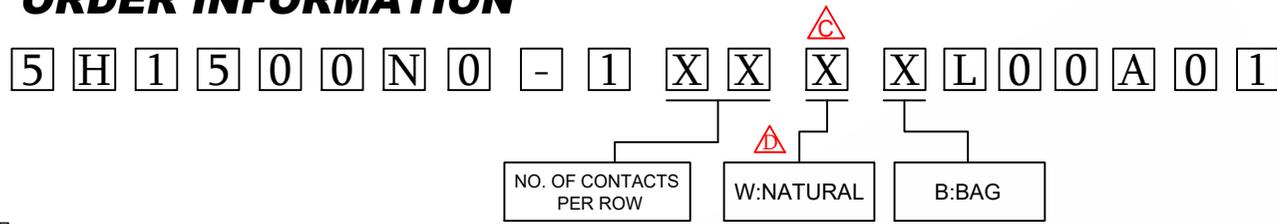

No. of contacts	Dimensions	
	A	B
02	1.50	4.50
03	3.00	6.00
04	4.50	7.50
05	6.00	9.00
06	7.50	10.50
07	9.00	12.00
08	10.50	13.50
09	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00
15	21.00	24.00

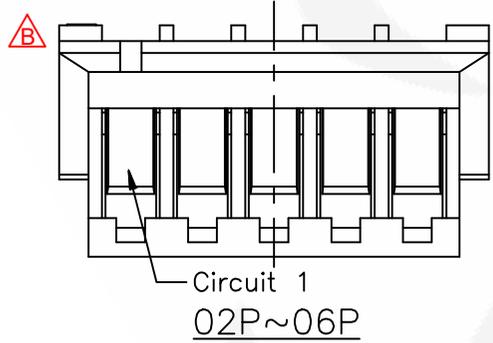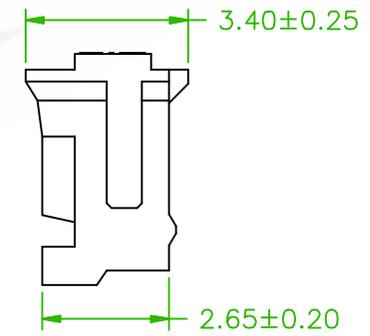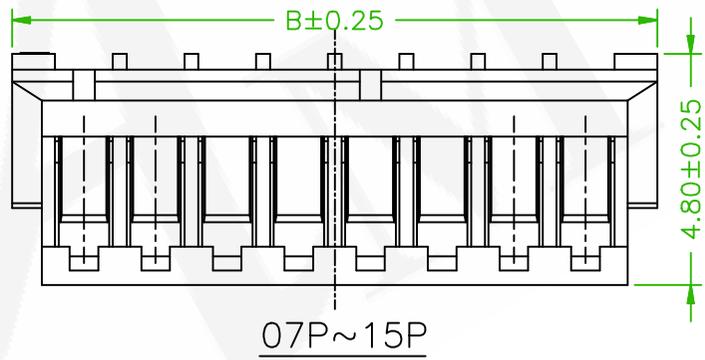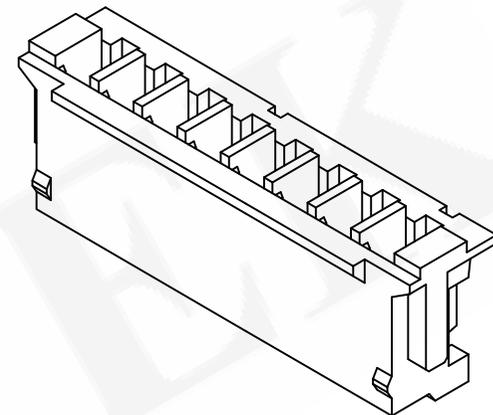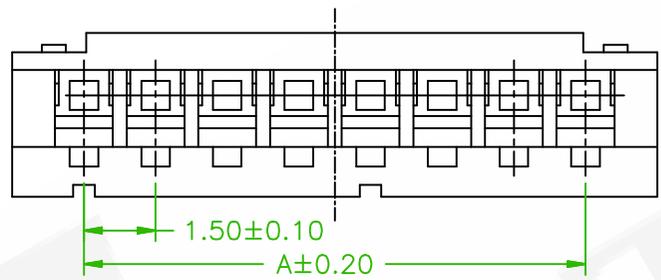

OLD PART NO.:1500H-XXW-L

Δ	ECN-202601065 Revise the drawing	Gaby	2026/02/10
Δ x2	Add:R:Red	David	2020/02/13
Δ x2	ECN NO. 190410,Revise the drawing	Nick	2019/05/02
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

懋德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	HOUSING 2.54mm			頁數 Page	1/1
品號 PART NO.	5H1500N0-1XXXXL00A01			繪圖 DRAWN	Kaiser 2013/04/15
圖號 DRAWING NO.	GW090-EL065	版本 REV.	D	核對 CHECKED	Paul 2013/04/15
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2013/04/15
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	