

SPECIFICATIONS

CURRENT RATING: 3A AC,DC
VOLTAGE RATING: 350V AC,DC
TEMPERATURE RANGE: -40°C to +105°C
CONTACT RESISTANCE: 20mΩ MAX
INSULATION RESISTANCE: 1000MΩ MIN
WITHSTANDING VOLTAGE: 500V AC/MINUTE
MATERIAL: NYLON 66,UL94V-0


ORDER INFORMATION

5 H 1 5 0 1 N 0 - 1 X X X X L 0 0 A 0 1


PITCH 1.50mm

1:SINGLE ROW
NO. OF CONTACTS PER ROW
W:NATURAL
B:BAG
RoHS


No.of contacts	Dimensions	
	Dim.A	Dim.B
02	1.50	4.10
03	3.00	5.60
04	4.50	7.10
05	6.00	8.60
06	7.50	10.10
07	9.00	11.60
08	10.50	13.10
09	12.00	14.60
10	13.50	16.10
11	15.00	17.60
12	16.50	19.10
13	18.00	20.60
14	19.50	22.10
15	21.00	23.60

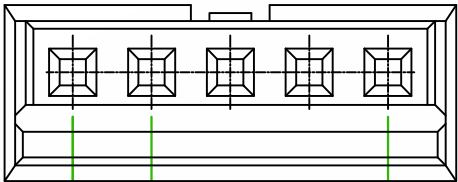

1.50±0.10
A±0.20

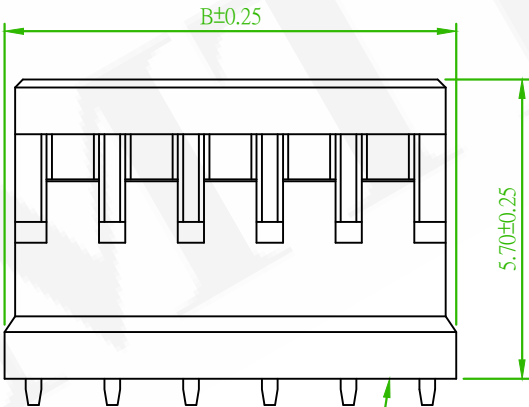

Circuit 1

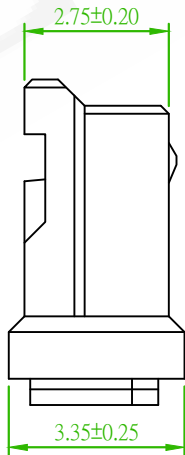

Old Part No.:1501H-XXW-L

REV.	ECN 202506005	Willy	2025/06/23
	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	HOUSING 1.5mm				頁數 Page	1/1
	品號 PART NO.	5H1501N0-1XXXXL00A01				繪圖 DRAWN	Jeff 2016/10/21
	圖號 DRAWING NO.	GW090-WW313	版本 REV.	B	核對 CHECKED	Johnny 2016/10/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/21	
	公差 TOLERANCE	.X ± 0.25 .XX± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		