

ORDER INFORMATION

SPECIFICATIONS

CURRENT RATING: 3A AC,DC

VOLTAGE RATING: 250V AC,DC

TEMPERATURE RANGE: -40°C ~ +105°C △

CONTACT RESISTANCE: 10mΩ MAX.

INSULATION RESISTANCE: 1000MΩ MIN.

WITHSTANDING VOLTAGE: 800V AC/MINUTE

MATERIAL

HOUSING: NYLON 66,UL94V-0


5 H 2 0 0 4 N 1 - 2 X X X X L 0 0 A 0 1

NO. OF CONTACTS
PER ROW

W:NATURAL

B:BAG

No. of contacts	Dimensions	
	A	B
2x02	2.00	4.50
2x03	4.00	6.50
2x04	6.00	8.50
2x05	8.00	10.50
2x06	10.00	12.50
2x07	12.00	14.50
2x08	14.00	16.50
2x09	16.00	18.50
2x10	18.00	20.50
2x11	20.00	22.50
2x12	22.00	24.50
2x13	24.00	26.50
2x14	26.00	28.50
2x15	28.00	30.50
2x16	30.00	32.50
2x17	32.00	34.50
2x18	34.00	36.50
2x19	36.00	38.50
2x20	38.00	40.50
2x22	42.00	44.50

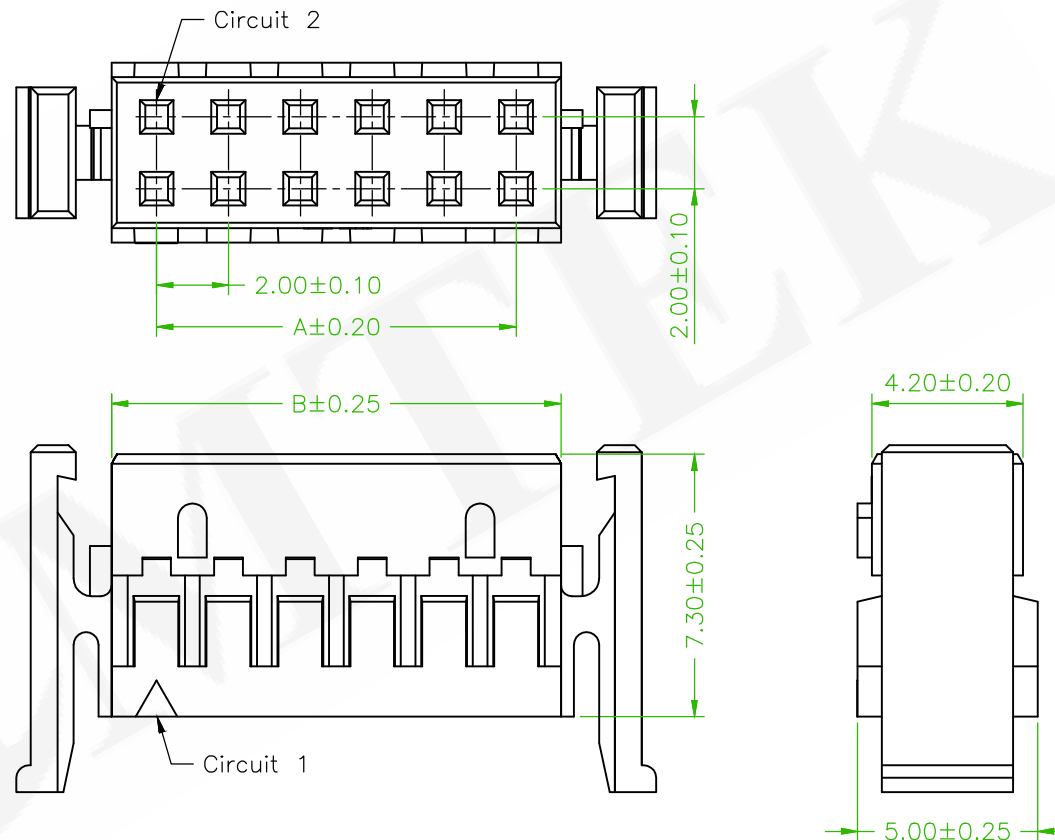

OLD PART NO.:2004H-2XXW1-L

REV.	ECN-202606022 Revise the drawing	Gaby	2026/06/16
	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	HOUSING 2.0mm				頁數 Page	1/1
	品號 PART NO.	5H2004N1-2XXXXL00A01				繪圖 DRAWN	Joe 2010/03/11
	圖號 DRAWING NO.	GN011-HR640	版本 REV.	B	核對 CHECKED	Paul 2010/03/11	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2010/03/11	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		