

ORDER INFORMATION

SPECIFICATIONS

CURRENT RATING: 3A AC,DC

VOLTAGE RATING: 250V AC,DC

TEMPERATURE RANGE: -40°C~+105°C △

CONTACT RESISTANCE: 10mΩ Max

INSULATION RESISTANCE: 1000MΩ MIN

WITHSTANDING VOLTAGE: 800V AC/MINUTE

MATERIAL

HOUSING: NYLON 66,UL94V-2




5 H 2 5 0 2 N 0 - 1 X X X X L 0 0 A 0 1

NO. OF CONTACTS
PER ROW

W:NATURAL

B:BAG

No. of contacts	Dimensions	
	A	B
02	2.50	6.00
03	5.00	8.50
04	7.50	11.00
05	10.00	13.50
06	12.50	16.00
07	15.00	18.50
08	17.50	21.00
09	20.00	23.50
10	22.50	26.00
11	25.00	28.50
12	27.50	31.00
13	30.00	33.50
14	32.50	36.00
15	35.00	38.50
16	37.50	41.00
17	40.00	43.50
18	42.50	46.00
19	45.00	48.50
20	47.50	51.00

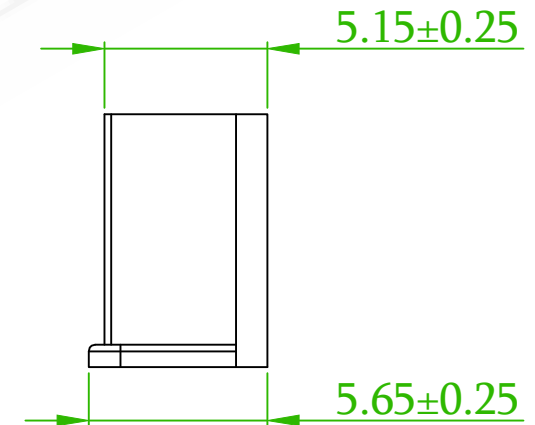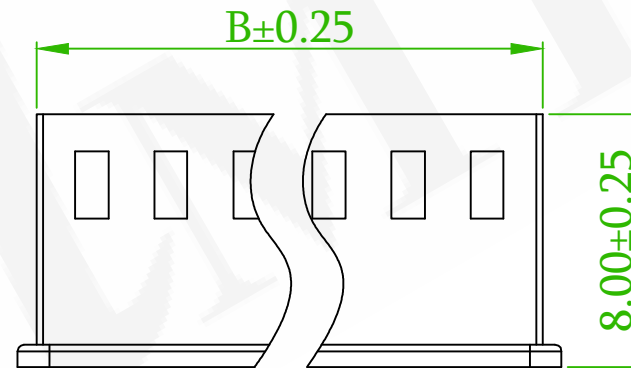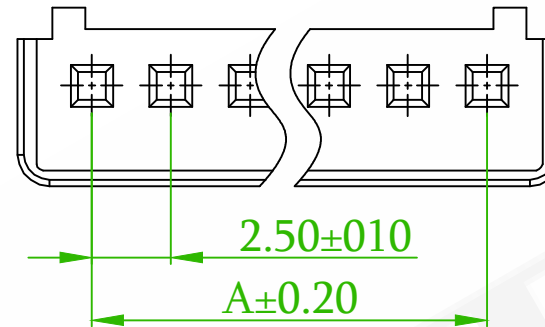

REV.	ECN-202607011 Revise the drawing	Gaby	2026/07/21
	ECN NO. OR DESCRIPTION	REVISED	DATE


懽德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	HOUSING 2.5mm				頁數 Page	1/1
品號 PART NO.	5H2502N0-1XXXXL00A01			繪圖 DRAWN	Nick 2019/03/22	
圖號 DRAWING NO.	GW090-NI011	版本 REV.	B	核對 CHECKED	Josh 2019/03/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2019/03/22	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		