

ORDER INFORMATION

SPECIFICATIONS

RATED CURRENT: 4 A AC,DC

RATED VOLTAGE: 250V AC,DC

CONTACT RESISTANCE: $\leq 10 \text{ m}\Omega$

DIELECTRIC STRENGTH: 1000V AC, 1 MINUTE

INSULATION RESISTANCE: $\geq 1000 \text{ M}\Omega$ AT 500 V DCOPERATING TEMPERATURE: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

MATERIAL

HOUSING: NYLON 66


5 H 2 5 4 4 N 0 - 1 X X X X L 0 0 A X X

NO. OF CONTACTS
PER ROWR:RED
W:NATURAL

B:BAG

01: UL94V-2
FOR RED02: UL94V-0
FOR NATURAL

No. of contacts	Dimensions	
	A	B
02	2.54	5.68
03	5.08	8.22
04	7.62	10.76
05	10.16	13.30
06	12.70	15.84
07	15.24	18.38
08	17.78	20.92
09	20.32	23.46
10	22.86	26.00
11	25.40	28.54
12	27.94	31.08
13	30.48	33.62
14	33.02	36.16
15	35.56	38.70
16	38.10	41.24
17	40.64	43.78
18	43.18	46.32
19	45.72	48.86
20	48.26	51.40

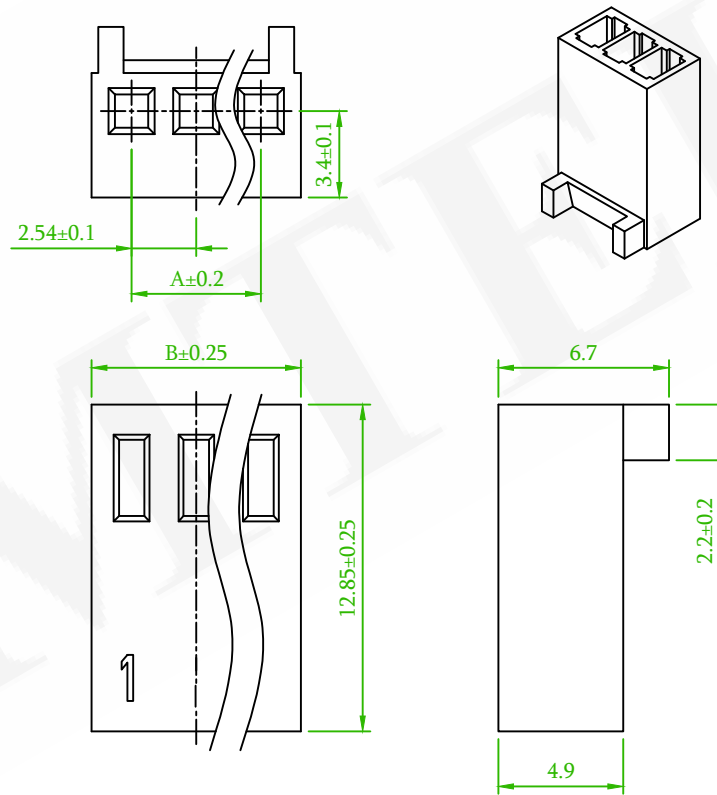

OLD PART NO.:2544H-XXR-L

△D	ECN-202609015	Gaby	2026/09/17
△C	BPM: 2024050202 Add the 06P	Benson	2024/05/02
△B	Add color: W: Natural, UL94V-0, remove current rating, contact resistance.	Gary	2018/07/31
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


懰德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		Housing				頁數 Page	1/1
品號 PART NO.	5H2544N0-1XXXXL00AXX(1-2)	繪圖 DRAWN		Jeff		2016/12/15	
圖號 DRAWING NO.	GW090-JF085	版本 REV.	D	核對 CHECKED	Josh	2018/07/31	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason	2018/07/31	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION			