

ORDER INFORMATION

SPECIFICATIONS

RATED CURRENT: 3A AC,DC

RATED VOLTAGE: 250 V AC,DC

OPERATING TEMPERATURE: -40°C~+105°C

CONTACT RESISTANCE: $\leq 10 \text{ m}\Omega$ INSULATION RESISTANCE: $\geq 1000 \text{ M}\Omega$

DIELECTRIC STRENGTH: 1500 V AC, 1 MINUTE

MATERIAL

INSULATOR: PBT, UL94V-0

MATTING ⚠




5T2545N-XXXXK02

5 H 2 5 5 5 N 0 - 2 X X X X L 0 0 K 0 1

NO. OF CONTACTS
PER ROW(03~32)

B:BLACK

B:BAG

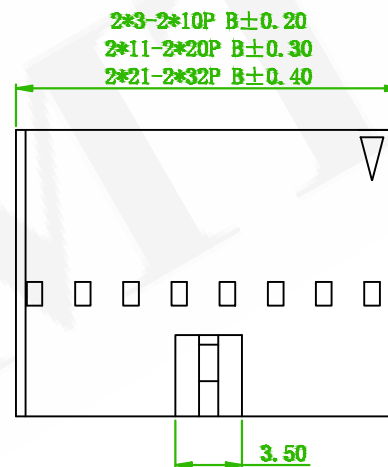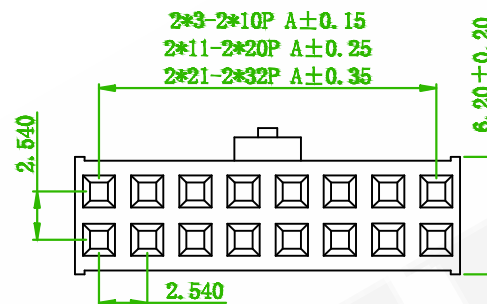

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*3P	5.08	7.82	2*21P	50.80	53.54
2*4P	7.62	10.36	2*22P	53.34	56.08
2*5P	10.16	12.90	2*23P	55.88	58.62
2*6P	12.70	15.44	2*24P	58.42	61.16
2*7P	15.24	17.98	2*25P	60.96	63.70
2*8P	17.78	20.52	2*26P	63.50	66.24
2*9P	20.32	23.06	2*27P	66.04	68.78
2*10P	22.86	25.60	2*28P	68.58	71.32
2*11P	25.40	28.14	2*29P	71.12	73.86
2*12P	27.94	30.68	2*30P	73.66	76.40
2*13P	30.48	33.22	2*31P	76.20	78.94
2*14P	33.02	35.76	2*32P	78.74	81.48
2*15P	35.56	38.30			
2*16P	38.10	40.84			
2*17P	40.64	43.38			
2*18P	43.18	45.92			
2*19P	45.72	48.26			
2*20P	48.26	51.00			

⚠	BPM 20260703004	Gaby	2026/07/06
⚠	BPM 20260202003	Willy	2026/02/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	HOUSING 2.54mm				頁數 Page	1/1
品號 PART NO.	5H2555N0-2XXXXL00K01				繪圖 DRAWN	Willy 2026/02/03
圖號 DRAWING NO.	GN137-WW564	版本 REV.	B	核對 CHECKED	Josh 2026/02/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2026/02/03	
公差 TOLERANCE	.X±0.3 .XXX±0.1 .XX±0.2	單位 UNIT	mm	第三 ANGLE PROJECTION		