

ORDER INFORMATION

SPECIFICATIONS


CURRENT RATING: 7A AC,DC
VOLTAGE RATING: 250V AC,DC
TEMPERATURE RANGE: -40°C TO +105°C
CONTACT RESISTANCE: 10mΩ MAX
INSULATION RESISTANCE: 1000MΩ MIN
WITHSTANDING VOLTAGE: 1500V AC/MINUTE
MATERIAL: NYLON 66,UL94V-2

5 H 3 9 6 1 N X - 1 X X X X L 0 0 A 0 1

PITCH 3.96mm	0:TYPE 0 1:TYPE 1	1:SINGLE ROW	NO. OF CONTACTS PER ROW	W:NATURAL	B:BAG	RoHS
-----------------	----------------------	-----------------	----------------------------	-----------	-------	------



NO. OF CONTACTS	DIMENSIONS	
	DIM A	DIM B
02	3.96	8.43
03	7.92	12.39
04	11.88	16.35
05	15.84	20.31
06	19.8	24.27
07	23.76	28.23
08	27.72	32.19
09	31.68	36.15
10	35.64	40.11
11	39.6	44.07
12	43.56	48.03
13	47.52	51.99
14	51.48	55.95
15	55.44	59.91
16	59.4	63.87
17	63.36	67.83
18	67.32	71.79
19	71.28	75.75
20	75.24	79.71

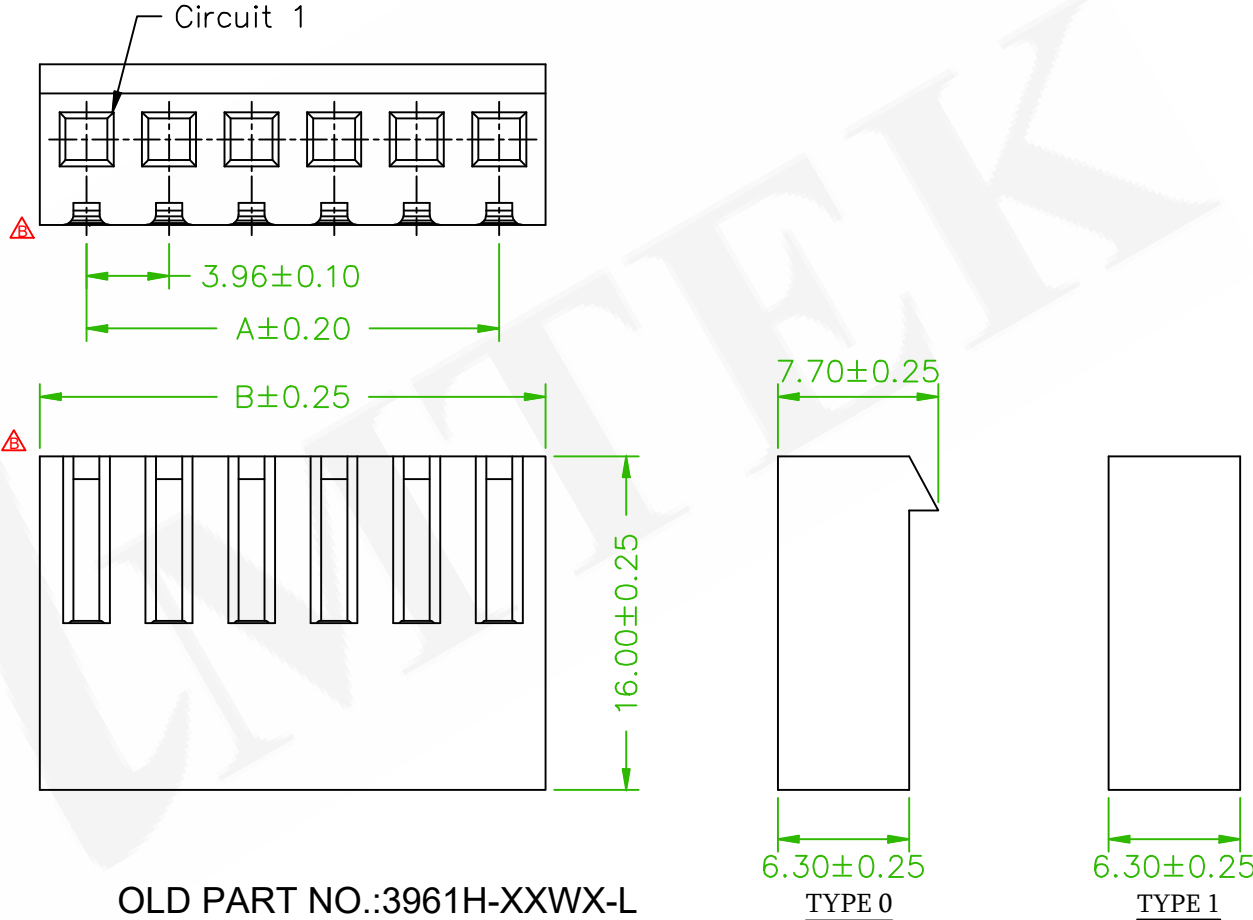

OLD PART NO.:3961H-XXWX-L

REV.	ECN-202506049 Revise the drawing	Gaby	2025/07/01
	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Housing 3.96mm				頁數 Page	1/1
	品號 PART NO.	5H3961NX-1XXXXL00A01				繪圖 DRAWN	JEFF 2016/10/05
	圖號 DRAWING NO.	GW090-BE224	版本 REV.	B	核對 CHECKED	JOHNNY 2022/12/10	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	AARON 2022/12/10	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	第三 ANGLE PROJECTION		