

ORDER INFORMATION

SPECIFICATIONS




RATED CURRENT: 7A AC,DC
 RATED VOLTAGE: 250 V AC,DC
 OPERATING TEMPERATURE: -40°C~+105°C
 CONTACT RESISTANCE: ≤10 mΩ
 INSULATION RESISTANCE: ≥1000 MΩ
 DIELECTRIC STRENGTH: 1500 V AC, 1 MINUTE


MATERIAL

INSULATOR: NYLON 66,UL94V-2

5 H 3 9 6 6 N 0 - 1 X X X X L 0 0 A 0 1



NO.OF CONTACTS	DIMENSIONS	
	A	B
02	3.96	9.06
03	7.92	13.02
04	11.88	16.98
05	15.84	20.94
06	19.80	24.90
07	23.76	28.86
08	27.72	32.82
09	31.68	36.78
10	35.64	40.74
11	39.60	44.70
12	43.56	48.66

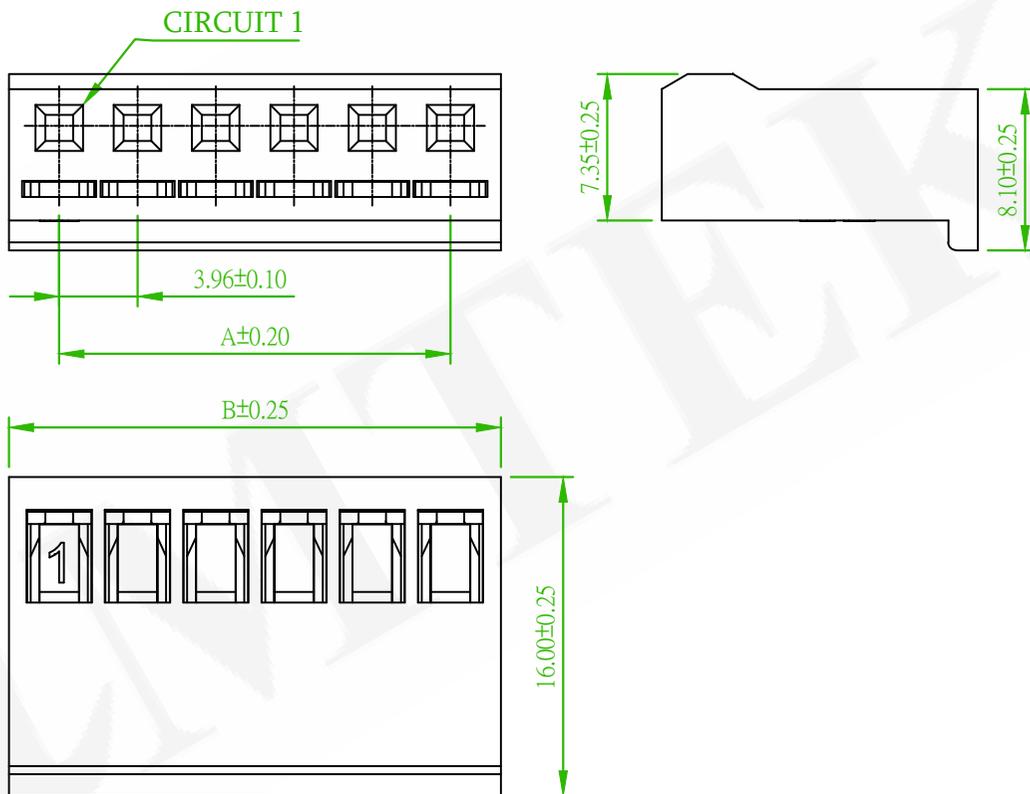

OLD PART NO.:3966H-XXW-L

REV.	ECN-202602010	Oliver	2026/02/11
	ECN NO. OR DESCRIPTION	REVISED	DATE

懌德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	HOUSING 3.96mm			頁數 Page	1/1
品號 PART NO.	5H3966N0-1XXXXL00A01			繪圖 DRAWN	Sinnys 2009/02/11
圖號 DRAWING NO.	GW090-EL065	版本 REV.	B	核對 CHECKED	Paul 2009/02/11
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/02/11
公差 TOLERANCE	.X ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	