

ORDER INFORMATION

SPECIFICATIONS

CURRENT RATING: 2x2P: 10A AC,DC

2x3P: 8A AC,DC

VOLTAGE RATING: 300V AC,DC

TEMPERATURE RANGE: -25°C TO +85°C

CONTACT RESISTANCE: 7mΩ MAX

INSULATION RESISTANCE: 1000MΩ MIN

WITHSTANDING VOLTAGE: 1500V AC/MINUTE

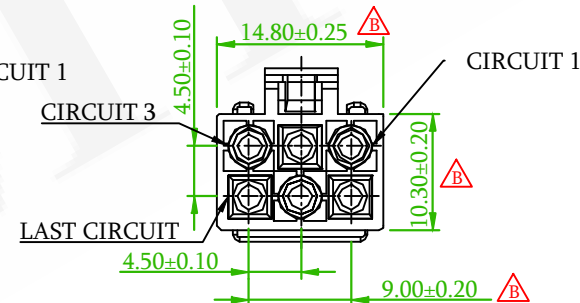
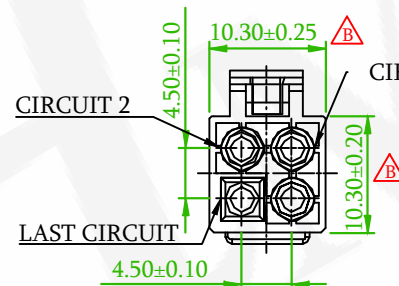


MATERIAL

INSULATOR: NYLON 66,UL94V-0

5 H 4 5 0 0 F 0 - 2 X X X X L 0 0 A 0 1

NO. OF CONTACTS
PER ROW(02,03)

W:NATURAL

B:BAG
PACKAGE

OLD PART NO.:4500H-X2XXW-L

	ECN-202606015 Revise the drawing	Roland	2026/06/18
	ECN-202511028	Oliver	2025/11/27
	ECN NO:241022 REVISE THE DRAWING	Gaby	2024/11/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	HOUSING 4.50mm				頁數 Page	1/1
品號 PART NO.	5H4500F0-2XXXXL00A01			繪圖 DRAWN	Kent 2007/02/12	
圖號 DRAWING NO.	GW090-AZ018	版本 REV.	E	核對 CHECKED	Paul 2007/02/12	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/02/12	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	第三 ANGLE PROJECTION		