

ORDER INFORMATION

SPECIFICATIONS

CURRENT RATING: 10A AC,DC

VOLTAGE RATING: 300V AC,DC

TEMPERATURE RANGE: -25°C TO +85°C

CONTACT RESISTANCE: 7mΩ MAX

INSULATION RESISTANCE: 1000MΩ MIN

WITHSTANDING VOLTAGE: 1500V AC/MINUTE

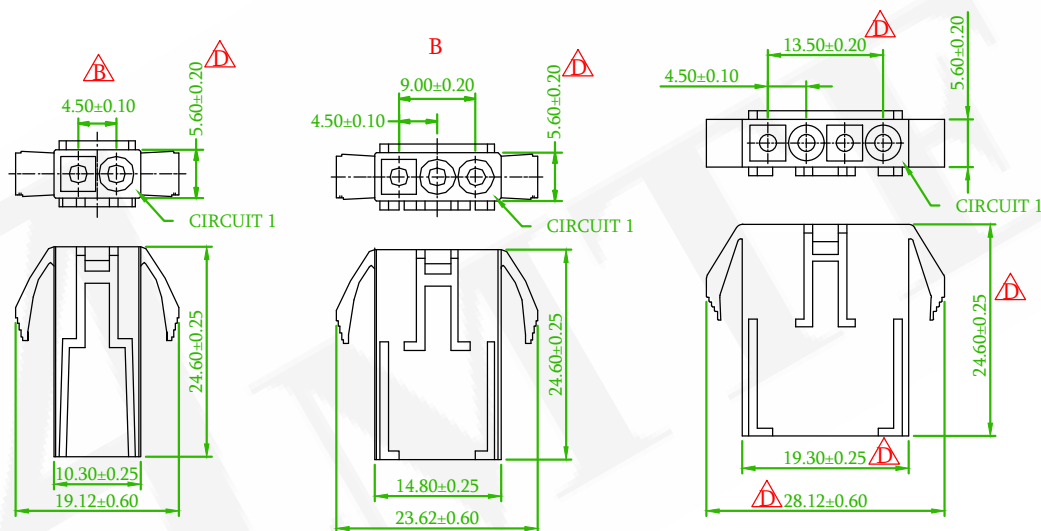
MATERIAL

INSULATOR: NYLON 66,UL94V-0

5 H 4 5 0 0 M 0 - 1 X X X X L 0 0 A 0 1

NO. OF CONTACTS
PER ROW (02,03,04)

W: NATURAL

B: BAG
PACKAGE

OLD PART NO.: 4500H-X1XXW-L

	ECN-202606015 Revise the drawing	Roland	2026/06/18
	ECN-202511028	Oliver	2025/11/27
	QEC NO.190902: REVISE THE DIMENSION	Benson	2019/09/04
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

懽德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	HOUSING 4.5mm				頁數 Page	1/1
品號 PART NO.	5H4500M0-1XXXXL00A01				繪圖 DRAWN	Kent 2007/02/12
圖號 DRAWING NO.	GW090-DA122	版本 REV.	E	核對 CHECKED	Josh 2019/04/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/04/25	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	第三 ANGLE PROJECTION		