

SPECIFICATIONS

CURRENT RATING: 10A AC,DC
VOLTAGE RATING: 300V AC,DC
TEMPERATURE RANGE: -25°C TO +85°C
CONTACT RESISTANCE: 7mΩ MAX
INSULATION RESISTANCE: 1000MΩ MIN
WITHSTANDING VOLTAGE: 1500V AC/MINUTE
MATERIAL: NYLON 66,UL94V-0

ORDER INFORMATION

5H4500X0-1XXWBL00A01

PITCH
4.50mm

F:FEMALE
M:MALE

NO. OF CONTACTS
PER ROW

W:NATURAL


B:BAG
PACKAGE

RoHS

AMTEK 耀德

2025.12.09

Released DCC

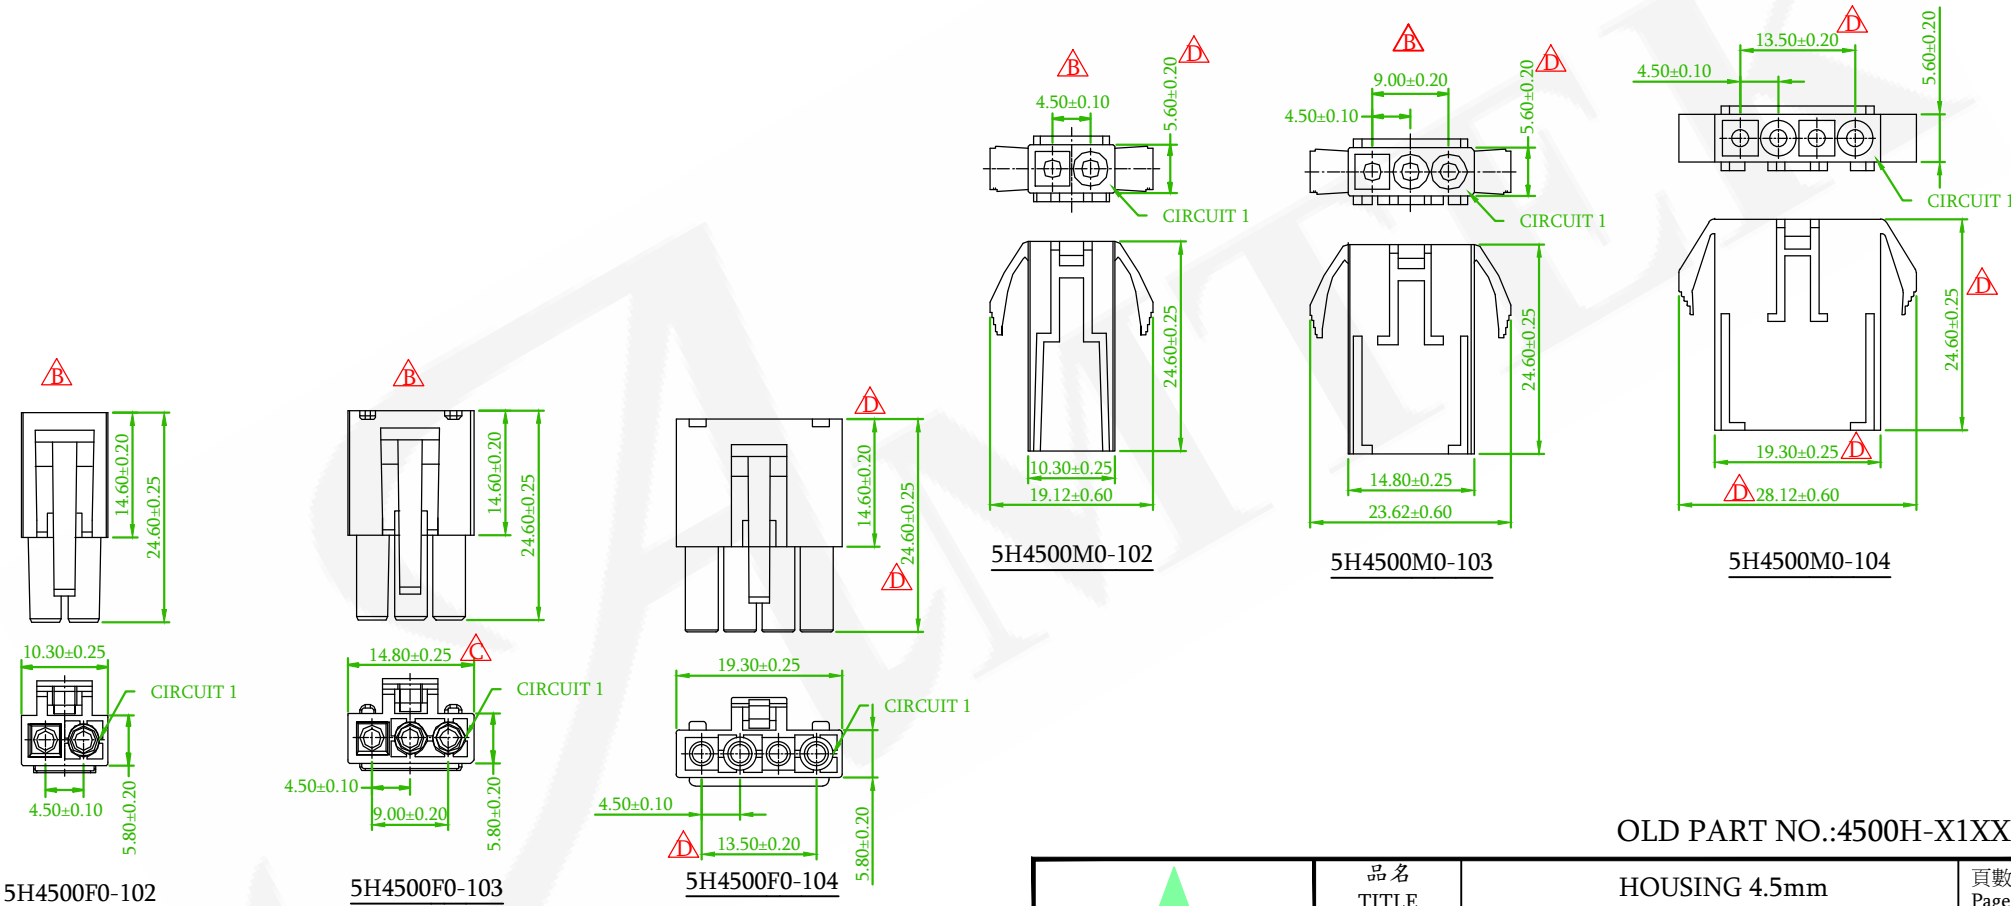

OLD PART NO.:4500H-X1XXW-L

△	ECN-202511028	Oliver	2025/11/27
△x1	QEC NO.190902: REVISE THE DIMENSION	Benson	2019/09/04
△x4	QEC NO.190402: REVISE THE DIMENSION AND DRRAWING AND INFO.	Daniel	2019/04/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	HOUSING 4.5mm				頁數 Page	1/1
品號 PART NO.	5H4500X0-1XXXXL00A01				繪圖 DRAWN	Kent 2007/02/12
圖號 DRAWING NO.	GW090-DA122	版本 REV.	D	核對 CHECKED	Josh 2019/04/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/04/25	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		