

SPECIFICATIONS

CURRENT RATING: 7A AC,DC
VOLTAGE RATING: 250V AC,DC
TEMPERATURE RANGE: -25°C ~ +85°C
CONTACT RESISTANCE: 10MΩ MAX
INSULATION RESISTANCE: 1000MΩ MIN
WITHSTANDING VOLTAGE: 1500V AC/MINUTE
MATERIAL: NYLON 66,UL94V-2

ORDER INFORMATION

5

H

5

0

8

2

M

0

-

1

0

4

W

B

L

0

0

A

0

1

PITCH
5.08mm


M:MALE TYPE

NO. OF CONTACTS
PER ROW

W:WHITE

B:BAG

RoHS

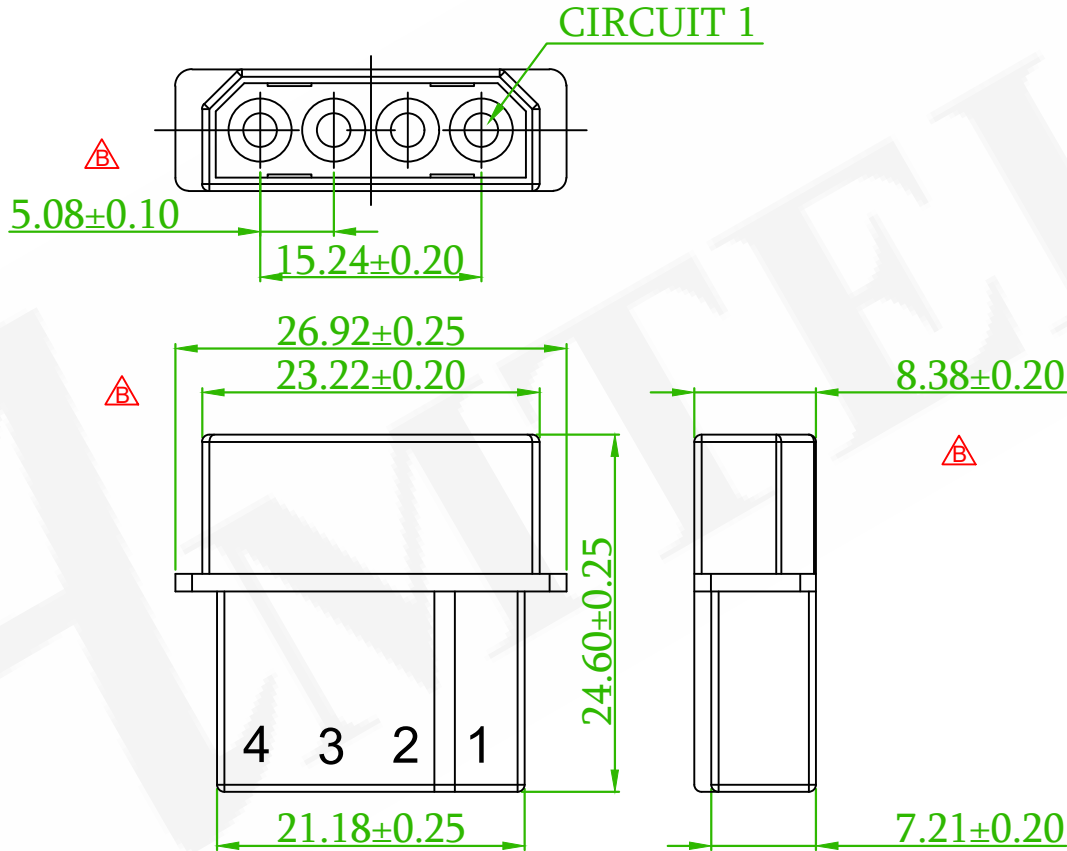

OLD PART NO.:5082H-M04W-L

				 懰德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.08mm HOUSING				頁數 Page	1/1
					品號 PART NO.	5H5082M0-104WBL00A01			繪圖 DRAWN	JOHN 2025/04/22	
					圖號 DRAWING NO.	GW090-JH280	版本 REV.	B	核對 CHECKED	JOSH 2025/04/22	
					客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/04/22	
					公差 TOLERANCE	. X ± 0.35 . XX± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		
	ECN-202506022 Revise the drawing			Gaby	2025/07/08						
REV.	ECN NO. OR DESCRIPTION			REVISED	DATE						