

ORDER INFORMATION

SPECIFICATIONS

CURRENT RATING: 7A AC,DC
VOLTAGE RATING: 250V AC,DC
TEMPERATURE RANGE: -40°C TO +105°C 
CONTACT RESISTANCE: 10mΩ MAX
INSULATION RESISTANCE: 1000MΩ MIN
WITHSTANDING VOLTAGE: 1500V AC/MINUTE
MATERIAL:NYLON 66,UL94V-2

5

H

5

0

8

3

N

X

-

1

X

X

X

X

L

0

0

A

0

1

PITCH
5.08mm

N:OTHER

0:TYPE 0
1:TYPE 1


NO. OF CONTACTS
PER ROW
(02~20)

W:NATURAL

B:BAG

RoHS

NO. OF CONTACTS	Dimensions	
	A	B
02P	5.08	10.08
03P	10.16	15.16
04P	15.24	20.24
05P	20.32	25.32
06P	25.40	30.40
07P	30.48	35.48
08P	35.56	40.56
09P	40.64	45.64
10P	45.72	50.72
11P	50.80	55.80
12P	55.88	60.88
13P	60.96	65.96
14P	66.04	71.04
15P	71.12	76.12
16P	76.20	81.20
17P	81.28	86.28
18P	86.36	91.36
19P	91.44	96.44
20P	96.52	101.52

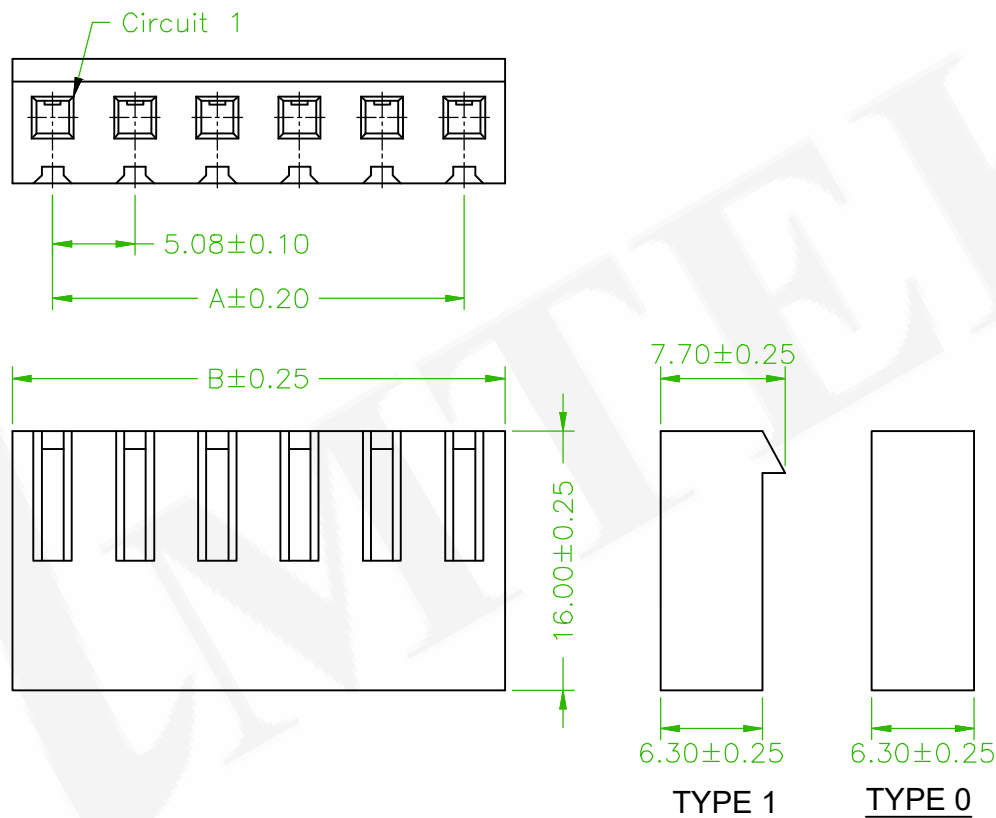

OLD PART NO.:5083H-XXWX-L

	ECN-202508013	Willy	2025/08/26
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



懰德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	HOUSING 5.08mm				頁數 Page	1/1
品號 PART NO.	5H5083NX-1XXXXL00A01				繪圖 DRAWN	Eloise 2016/11/18
圖號 DRAWING NO.	GW090-JF022	版本 REV.	B	核對 CHECKED	Jonny 2016/11/18	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/18	
公差 TOLERANCE	X ± 0.25 .XX ± 0.15	X° ± 1°	單位 UNIT	mm	THIRD ANGLE PROJECTION	