

ORDER INFORMATION

SPECIFICATIONS

INSULATION RESISTANCE: 1000MΩ MIN.

DIELECTRIC VOLTAGE: 5000V AC FOR ONE MINUTE

OPERATION TEMPERATURE: -55°C TO +105°C



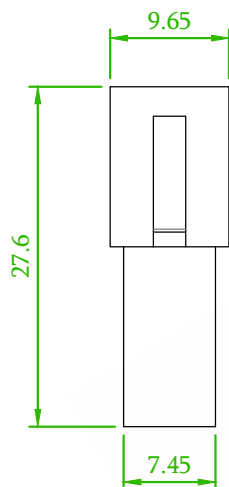
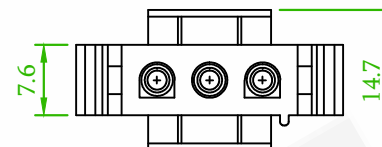


MATERIAL

INSULATOR: NYLON 66, UL94V-0 OR UL94V-2

5 H 6 3 5 0 F 0 - 1 X X X B L 0 0 C X X

NO. OF CONTACTS
PER ROW(01~10P)W:NATURAL
R:RED

B:BAG

01: UL94V-2
02: UL94V-0

5H6350F0-102WBL00CXX

5H6350F0-103WBL00CXX

5H6350F0-101WBL00CXX

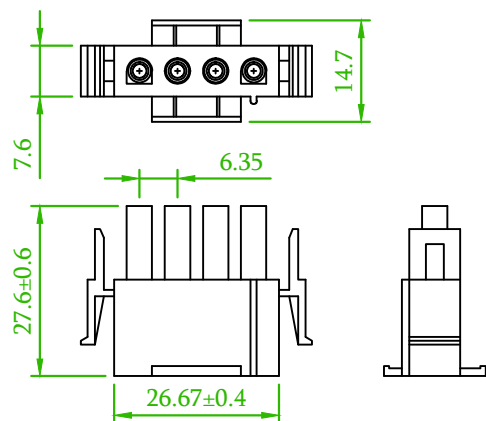
Old P/N:6350H-F1XXW-L

	ECN-202606015 Revise the drawing	Roland	2026/06/29
	ECR 200510.: Revise the Dimension , Add the Color	David	2020/05/29
	Revise the drawing.	Gary	2018/10/02
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

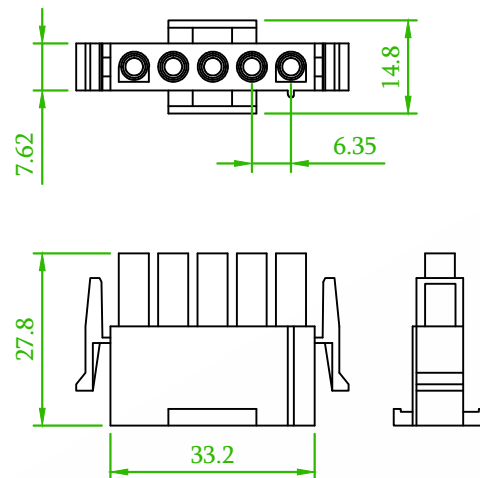


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		HOUSING 6.35mm			頁數 Page	1/2
品號 PART NO.		5H6350F0-1XXXXL00C0X(1-2)			繪圖 DRAWN	Jeff 2016/12/13
圖號 DRAWING NO.		GW083-GB359			核對 CHECKED	Josh 2018/10/02
客戶品號 CUSTOMER P/N					承認 APPROVED	Jason 2018/10/02
公差 TOLERANCE		.X ±0.40	比例 SCALE	None	承認 APPROVED	Jason 2018/10/02
		.XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	

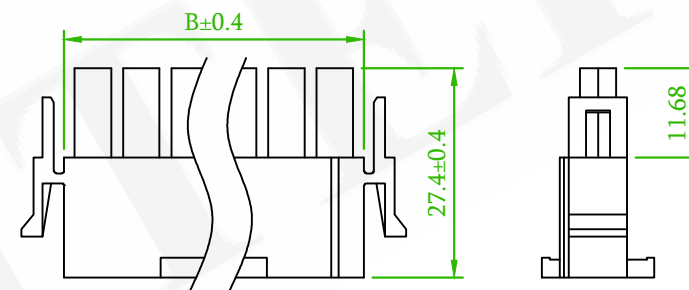
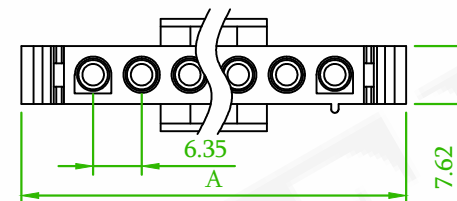


5H6350F0-104WBL00CXX



5H6350F0-105WBL00CXX

No. of Contacts	Dimensions(mm)	
	A	B
06	31.75	39.37
07	38.10	45.72
08	44.45	52.07
09	50.80	58.42
10	57.15	64.77



5H6350F0-1XXWBL00CXX(06 to 10)

Old P/N:6350H-F1XXW-L

	ECN-202606015 Revise the drawing	Roland	2026/06/29
	ECR 200510.: Revise the Dimension , Add the Color	David	2020/05/29
	Revise the drawing.	Gary	2018/10/02
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		HOUSING 6.35mm			頁數 Page	2/2
品號 PART NO.		5H6350F0-1XXXXL00C0X(1-2)			繪圖 DRAWN	Jeff 2016/12/13
圖號 DRAWING NO.		GW083-GB359	版本 REV.	E	核對 CHECKED	Josh 2018/10/02
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/10/02
公差 TOLERANCE		.X ±0.40 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	