

CONTACT RATING : 0.5A
CONTACT RESISTANCE: 30 mΩ MAX.
DIELECTRIC VOLTAGE: 300V FOR ONE MINUTE
OPERATION TEMPERATURE: -40 °C TO +85 °C
DURABILITY: 100 CYCLE MIN





INSULATOR: LCP, UL94V-0, BLACK
CONTACT PIN: COPPER ALLOY

5 H S P 2 0 1 - X X N X - 0 1

SF:SELECTIVE
15u"

H:T/R W/O CAP

Released DCC

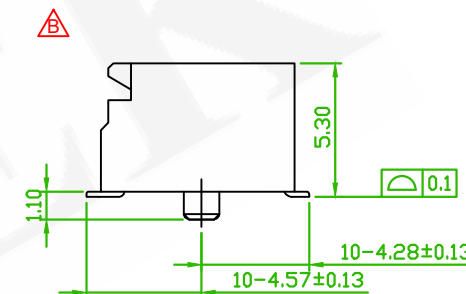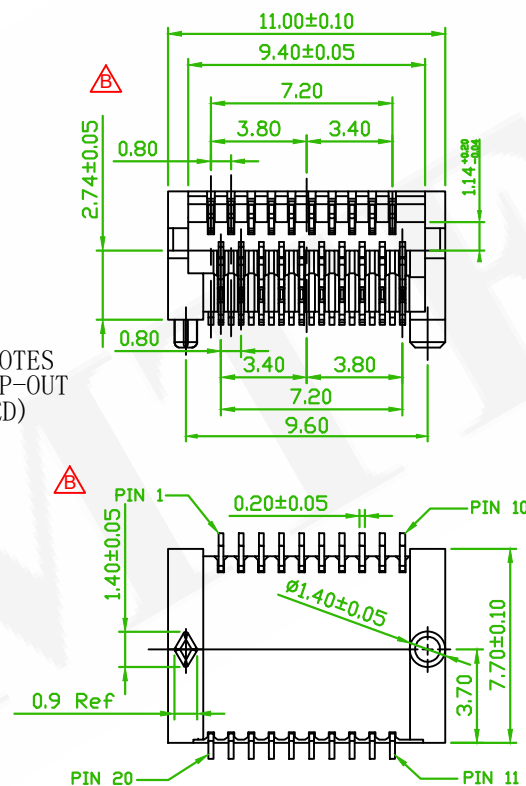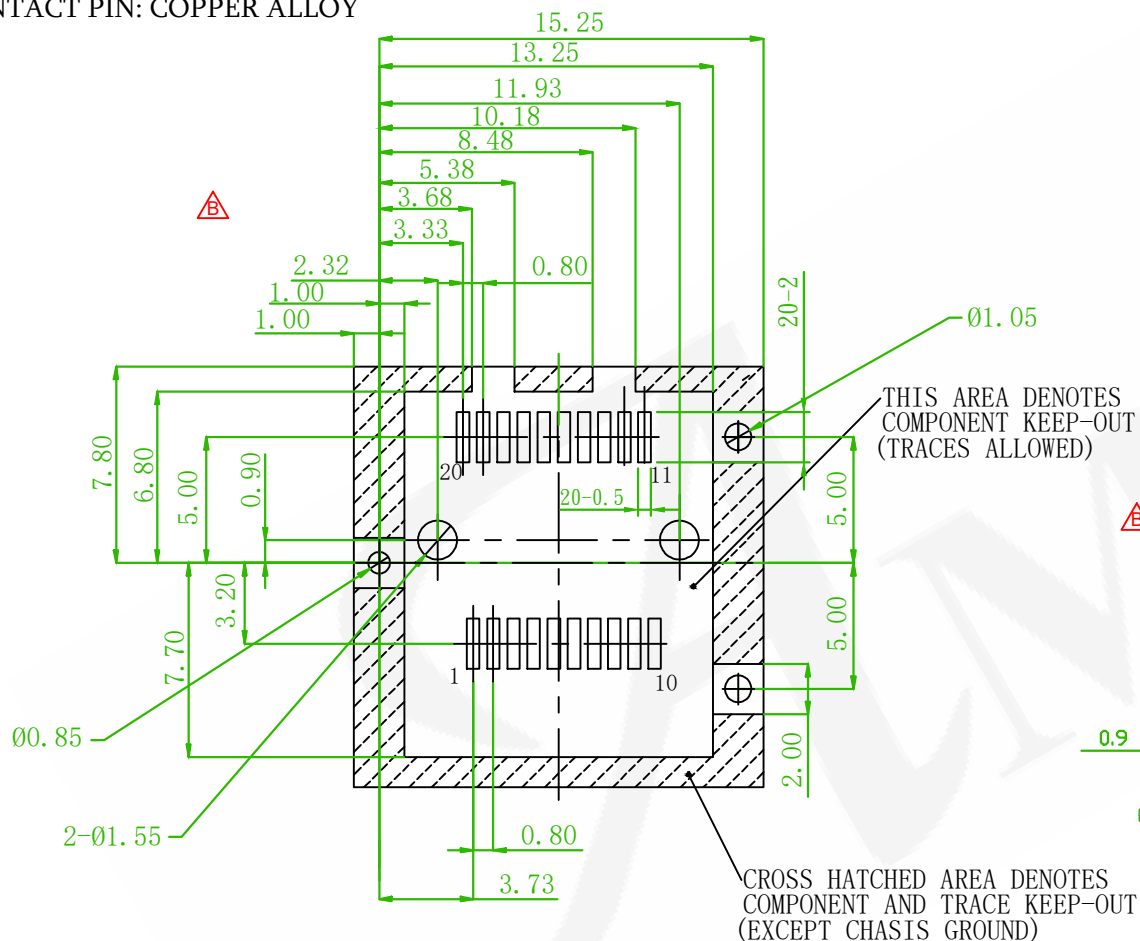

RECOMMENDED PCB LAYOUT (PCB TOLERANCE ± 0.05)

	ECN 202511005	Willy	2025/11/12
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	SFP+ 1x1 CONNECTOR				頁數 Page	1/1
品號 PART NO.	5HSP201-XXNX-01			繪圖 DRAWN	David 2019/06/14	
圖號 DRAWING NO.	GN189-DC124	版本 REV.	B	核對 CHECKED	Josh 2019/06/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/06/14	
公差 TOLERANCE	.X ± 0.25 .XX± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		