

SPECIFICATIONS

CURRENT RATE:1 AMP

INSULATION RESISTANCE:1000M Ω MIN.

CONTACT RESISTANCE:20m Ω MAX.

DIELECTRIC VOLTAGE:500V AC FOR ONE MINUTE

OPERATION TEMPERATURE:-40°C TO +105°C

◎:Standard Recommend

MATERIAL

INSULATOR:POLYESTER, UL94V-0

TERMINAL:COPPER ALLOY

FINISH

GOLD PLATED ON CONTACT AREA, NICKLE UNDERPLATED OVERALL

ORDER INFORMATION

5 J P 3 X D - 2 1 X X

P:PHOSPHOR BRONZE

D:WITH HANDLE 5.5mm

G0:GOLD FLASH(1u")

X X L - 0 1


◎B:BLACK INSULATOR
U:BLUE INSULATOR
G:GRAY INSULATOR
R:RED INSULATOR
E:GREEN INSULATOR
W:WHITE INSULATOR

B:BAG

AMTEK 懽德

2025.04.25

Released DCC

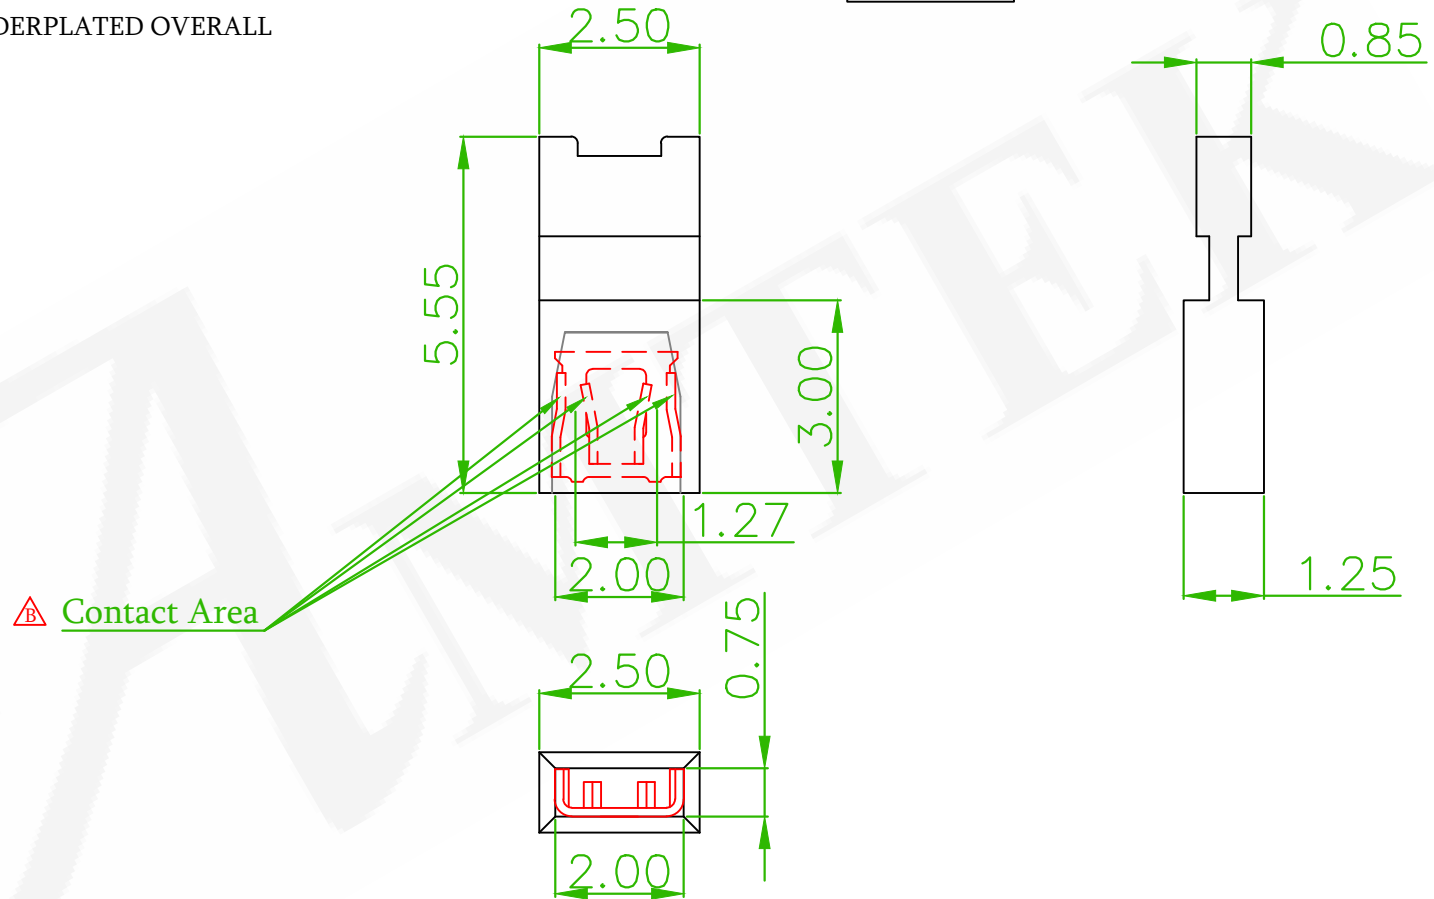

	ECN 202503021	John	2025/04/14
 x2	ECN NO.230113: Revise the Specification & Drawing	Rex	2023/03/29
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


懽德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MINI JUMPER 1.27mm				頁數 Page	1/1
品號 PART NO.	5JP3XD-21XXXXL-01(CN047)				繪圖 DRAWN	JEFF 2016/03/04
圖號 DRAWING NO.	GN047-RE281	版本 REV.	C	核對 CHECKED	JOHN 2016/03/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOHN 2016/03/04	
公差 TOLERANCE	.X $\pm$ 0.20 .XX $\pm$ 0.12	單位 UNIT	mm	第三 ANGLE PROJECTION		