



SPECIFICATION

CURRENT RATING: 0.5 AMP

INSULATION RESISTANCE: 100MΩ MIN.

CONTACT RESISTANCE: 50mΩ MAX.

DIELECTRIC VOLTAGE: 500V AC FOR ONE MINUTE

OPERATION TEMPERATURE: -40°C ~+85°C

MATERIAL

INSULATOR: LCP, UL 94V-0, BLACK

CONTACT : C2680

SHELL: SUS201



PEG: C2680

ORDER INFORMATION


5 K M S G - 0 6 X X X X L 0 1

HINGE TYPE	NO. OF CONTACTS	G0: GOLD FLASH	N: W/O PAG	H: T/R W/O CAP
------------	-----------------	----------------	------------	----------------

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I/O

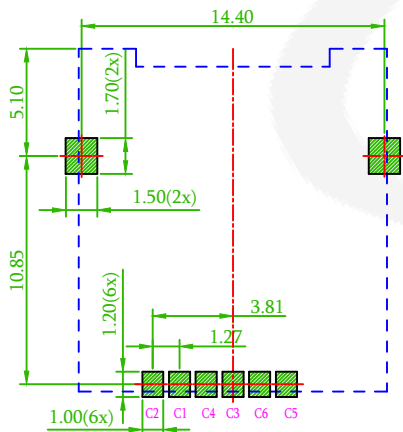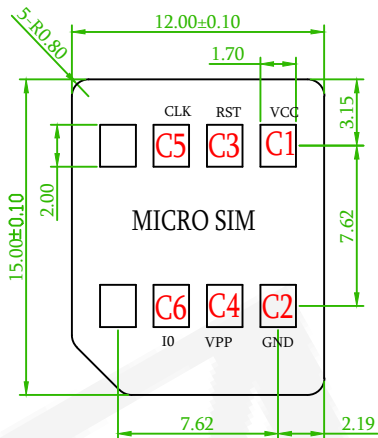

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

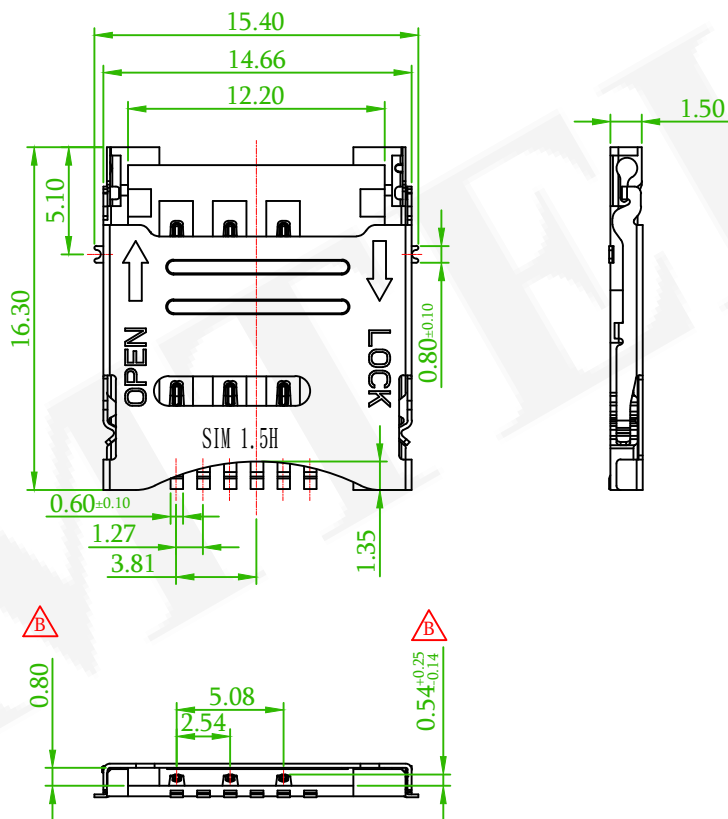

REV.	ECN NO.:240434 Revise the drawing	Benson	2024/05/24
	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MICRO SIM CARD HINGE TYPE				頁數 Page	1/1
	品號 PART NO.	5KMSG-06XXXXL01				繪圖 DRAWN	Benson 2019/05/30
	圖號 DRAWING NO.	GN195-BS044	版本 REV.	B	核對 CHECKED	Josh 2019/05/30	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/05/30	
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	