





SPECIFICATION

Current Rating: 1.0 AMP
Voltage Rating: 30VRMS
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 50mΩ Max.
Dielectric Voltage: 500V DC
Operation Temperature: -40°C to +85°C

MATERIAL

Housing :LCP, UL94V-0, Black
Contact : Copper Alloy

PIN No.	DESCRIPTION
C1	VCC (SUPPLY VOLTAGE)
C2	RST (RESET SIGNAL)
C3	CLK (CLOCK SIGNAL)
C4	RESERVED
C5	GND
C6	VPP (VARIABLE SUPPLY VLOTAGE)
C7	I/O (DATA INPUT/OUTPUT)
C8	RESERVED
G1~G4	GND

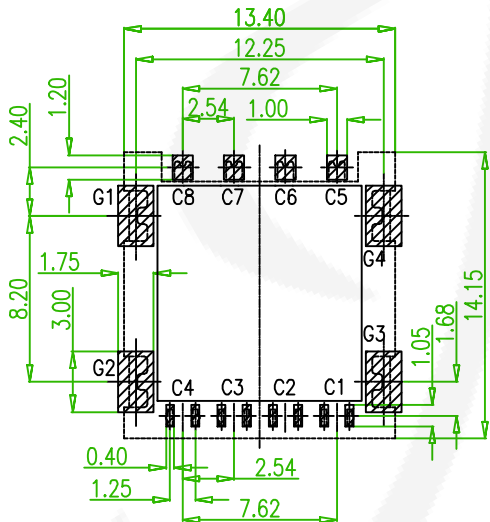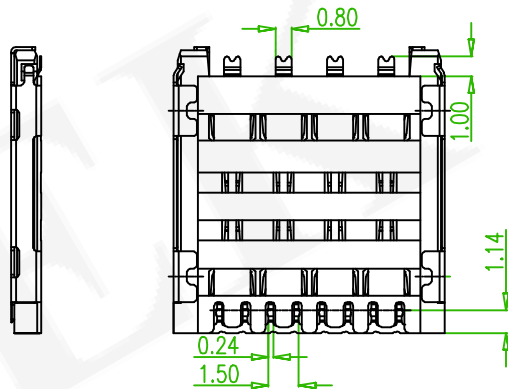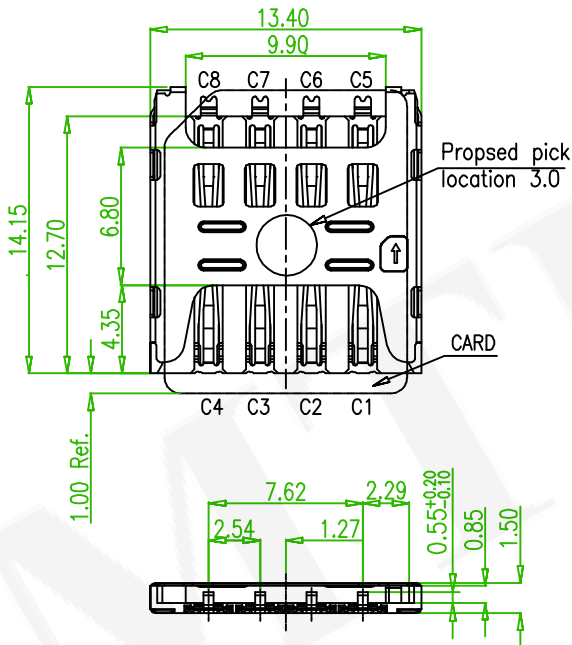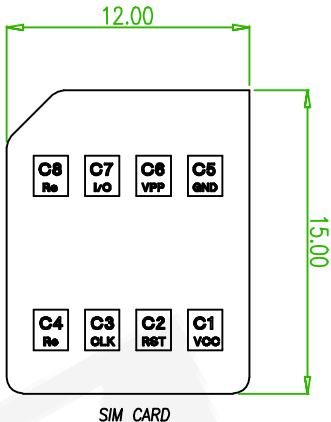

RECOMMENDED PCB LAYOUT(TOLERANCE ±0.05)
RECOMMENDED MATAI MASK T=0.12MM

ORDER INFORMATION

5 K M S S - 0 8 G 0 N H L 0 2

No. of Contacts G0:Gold Flash H:T/R W/O Cap

AMTEK 耀德
2022.11.03
Released DCC



品名 TITLE	MICRO Sim Card PUSH-PULL TYPE				頁數 Page	1/1
品號 PART NO.	5KMSS-08G0NHL02				繪圖 DRAWN	Tim 2022/11/02
圖號 DRAWING NO.	GN195-TI137	版本 REV.	A	核對 CHECKED	Josh 2022/11/02	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2022/11/02	
公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		