


SPECIFICATION ⚠
CURRENT RATING: 1.0 AMP
RATED VOLTAGE: 50V AC MAX.
INSULATION RESISTANCE: 1000MΩ MIN.
CONTACT RESISTANCE: 100mΩ MAX.
DIELECTRIC VOLTAGE: 500V AC FOR ONE MINUTE
OPERATION TEMPERATURE: -40 °C TO +85 °C

MATERIAL
INSULATOR: LCP, UL 94V-0,BLACK
COVER:LCP UL94V-0.BLACK
CONTACT : C5191




ORDER INFORMATION

5 K S I G - 0 6 X X X X L 0 1

NO. OF CONTACTS	S0:SELECTIVE	N: W/O PEG	H: T/R W/O CAP
-----------------	--------------	------------	----------------

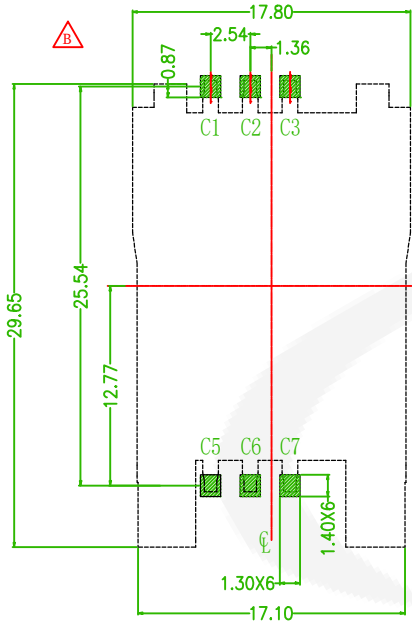

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

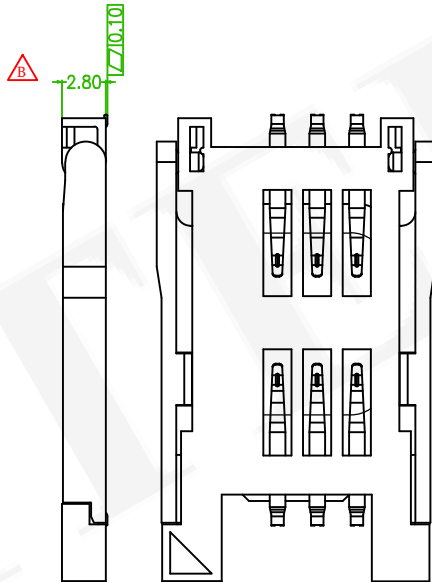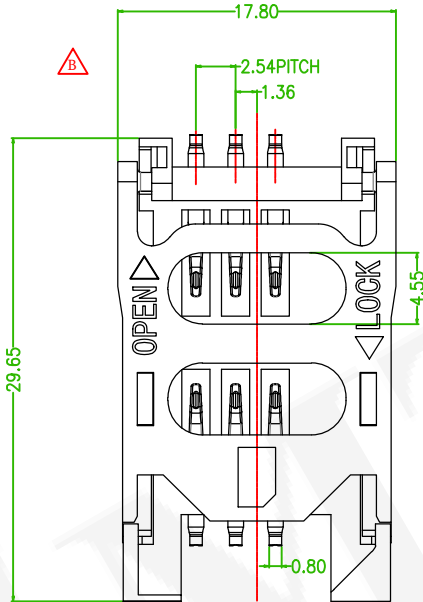

NO	DESCRIPTION	NO	DESCRIPTION
C1	VCC	C5	GND
C2	RST	C6	VPP
C3	CLK	C7	I/O

⚠	QEC NO.: 240704 Revise the drawing	Gaby	2024/07/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	SIM CARD HINGE TYPE				頁數 Page	1/1
品號 PART NO.	5KSIG-06XXXXL01				繪圖 DRAWN	David 2019/10/01
圖號 DRAWING NO.	GN195-DV336	版本 REV.	B	核對 CHECKED	Josh 2019/10/01	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/10/01	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		