
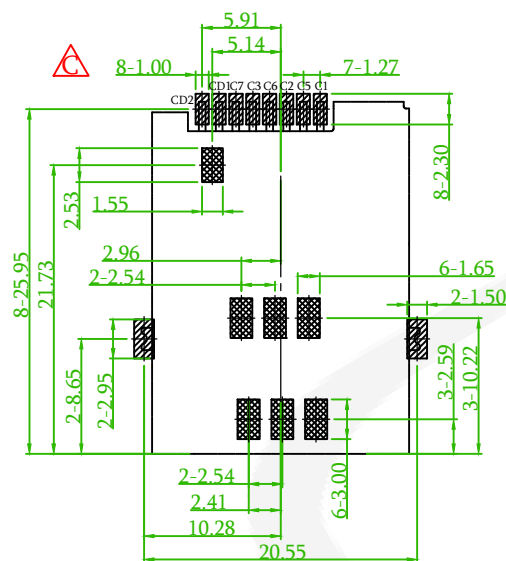


CURRENT RATING: 0.5 AMP
INSULATION RESISTANCE: 1000MΩ MIN.
CONTACT RESISTANCE: 100mΩ MAX.
DIELECTRIC VOLTAGE: 500V DC FOR ONE MINUTE
OPERATION TEMPERATURE: -40°C TO +75°C

INSULATOR: HIGH TEMPERATURE THERMOPLASTIC
CONTACT : COPPER ALLOY
SHELL: STANLESS STEEL

5 K S I P - 0 8 X X X X L 0 8




RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

-  SMT SOLDER AREA
 COPPER RESTRICTED AREA
 1.TOUCH AREA OF CONTACT
 TIPS NO ELECTRICAL FUNCTION
 2.NO FIRST PCB_LAYOUT
 CIRCUITS IN THE AREA

PIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
CD1	POL
CD2	DETECT SWITCH

CIRCUIT DIAGRAM FOR DETECT SWITCHES	
	
CARD INSERTED	WITHOUT CARD

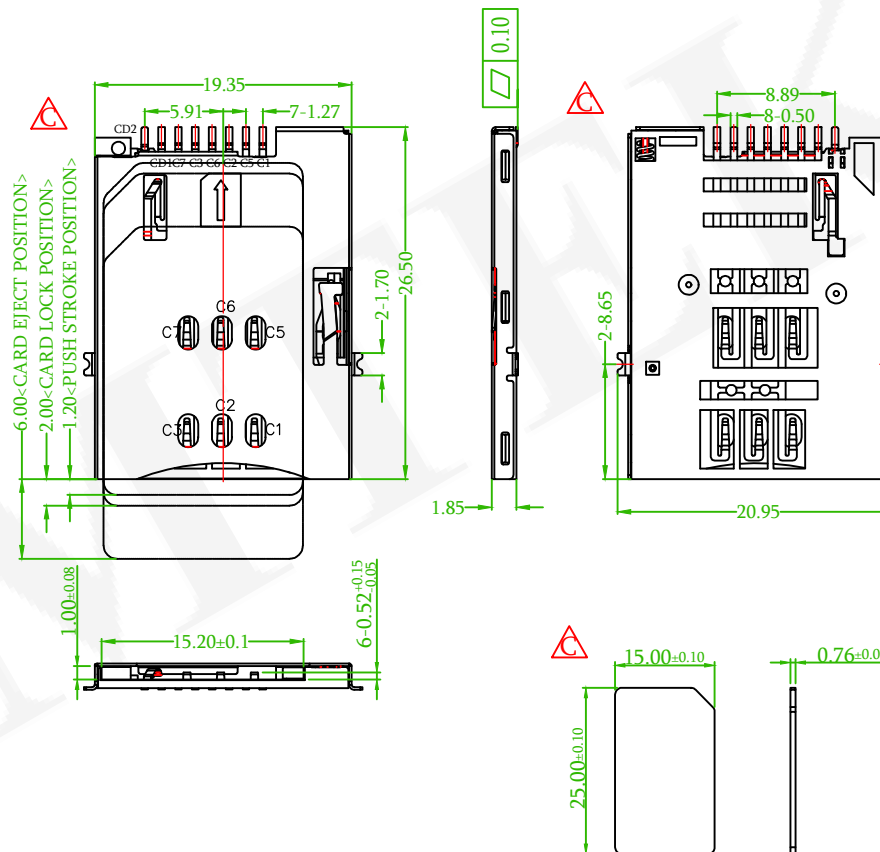

品名 TITLE	SIM CARD PUSH-PUSH TYPE				頁數 Page	1/1
品號 PART NO.	5KSIP-08XXXXL08			繪圖 DRAWN	Benson 2019/06/17	
圖號 DRAWING NO.	GN195-BS086	版本 REV.	C	核對 CHECKED	Josh 2019/06/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/06/17	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

	QEC NO.: 240810 Revise the drawing	Gaby	2024/08/29
	ECN NO.: 240609 Revise the drawing	Gaby	2024/06/18
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

