

SPECIFICATION △B

CURRENT RATING: 0.5 AMP
INSULATION RESISTANCE: 100MΩ MIN.
CONTACT RESISTANCE: 100mΩ MAX.
DIELECTRIC VOLTAGE: 500V AC FOR ONE MINUTE



MATERIAL △B

INSULATOR: LCP, UL 94V-0, BLACK
CONTACT: PHOSPHOR BRONZE
SHELL: SUS201

ORDER INFORMATION

5 K S I S - 0 6 S X X X L 0 1

NO. OF CONTACTS(06)	S0:SELECTIVE	N:NON PEG	H: T/R W/O CAP
---------------------	--------------	-----------	----------------

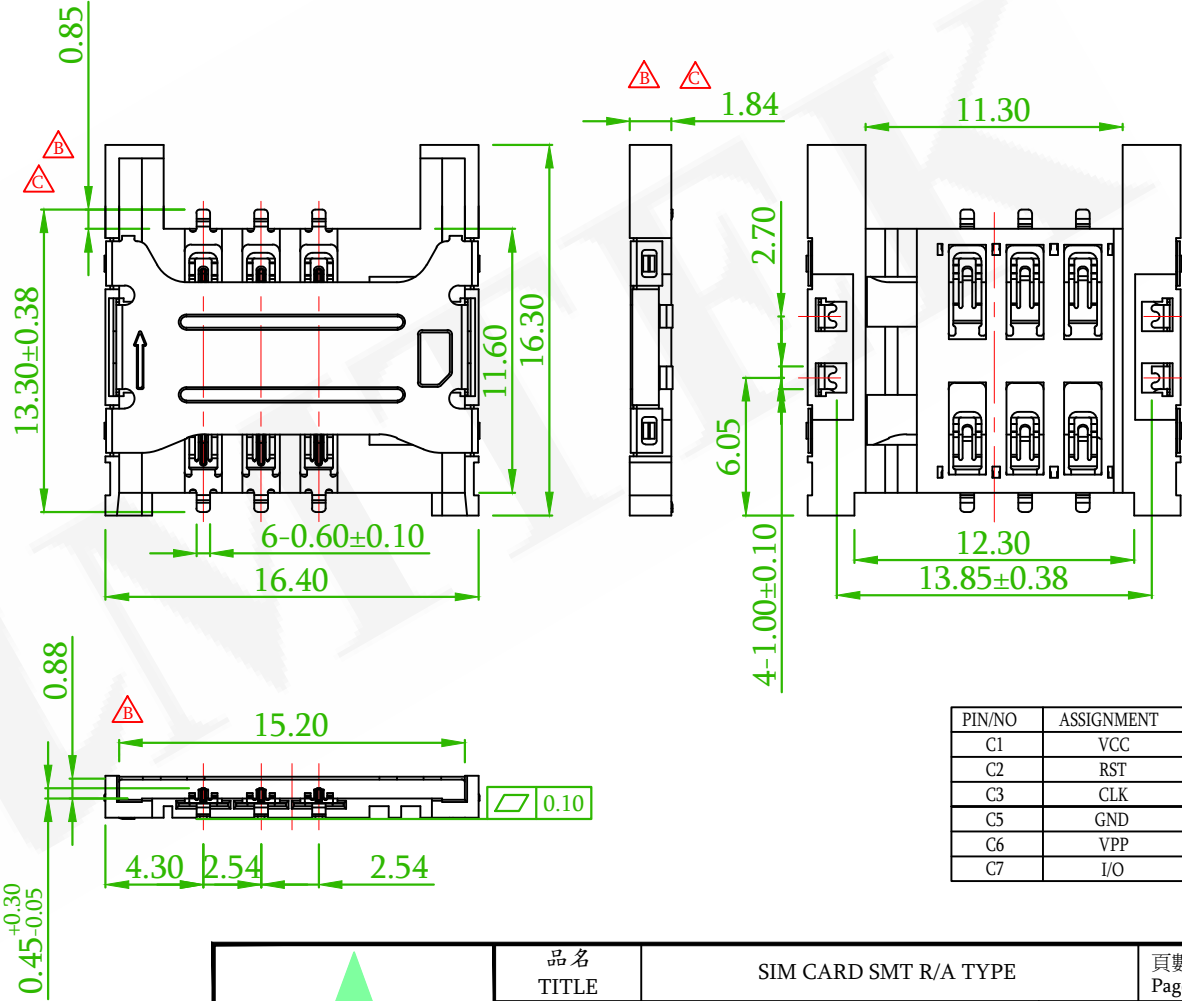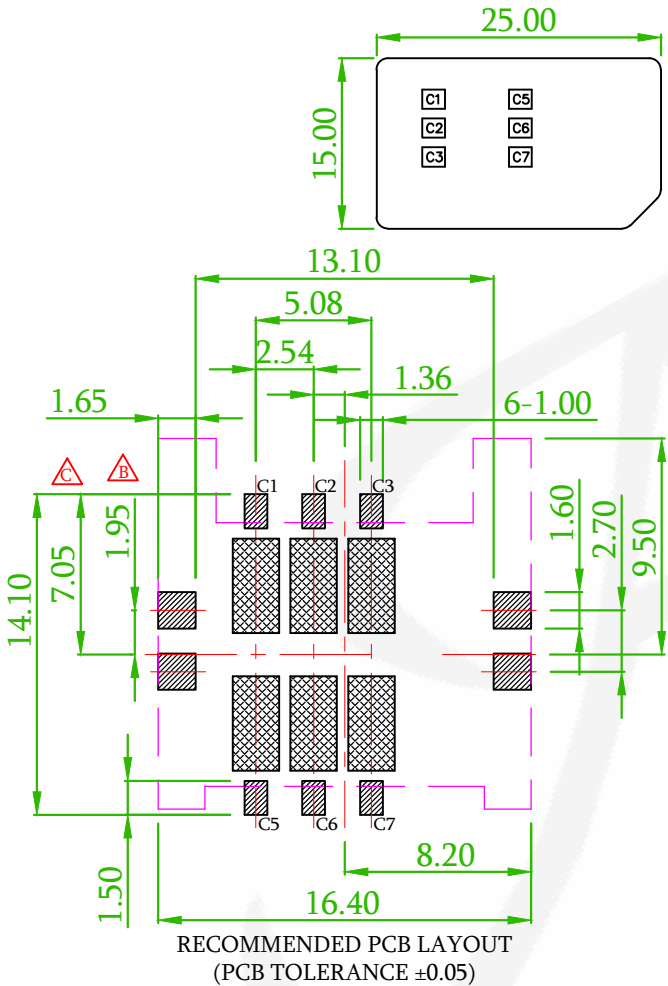

PIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△C	ECN-202501008 Revise the drawing	Gaby	2025/03/04
△B x8	QEC NO.:230103 Revise the drawing	Alice	2023/01/19



韋德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	SIM CARD SMT R/A TYPE				頁數 Page	1/1
品號 PART NO.	5KSIS-06XXXXL01				繪圖 DRAWN	DAVID 2019/10/01
圖號 DRAWING NO.	GN195-DV339	版本 REV.	C	核對 CHECKED	JOSH 2019/10/01	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2019/10/01	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		