

SPECIFICATION

CURRENT RATING: 0.5 AMP
 INSULATION RESISTANCE: 1000MΩ MIN AT 250V DC.
 CONTACT RESISTANCE: 100mΩ MAX.
 DIELECTRIC VOLTAGE: 500V AC FOR ONE MINUTE
 OPERATION TEMPERATURE: -40 °C to +85 °C

MATERIAL

INSULATOR: LCP, UL 94V-0, BLACK
 CONTACT: C2680
 SHELL: SUS201





ORDER INFORMATION

5 K T F G - 0 8 X X X X L 0 1

NO. OF CONTACTS

S0:SELECTIVE Au

H: T/R W/O CAP

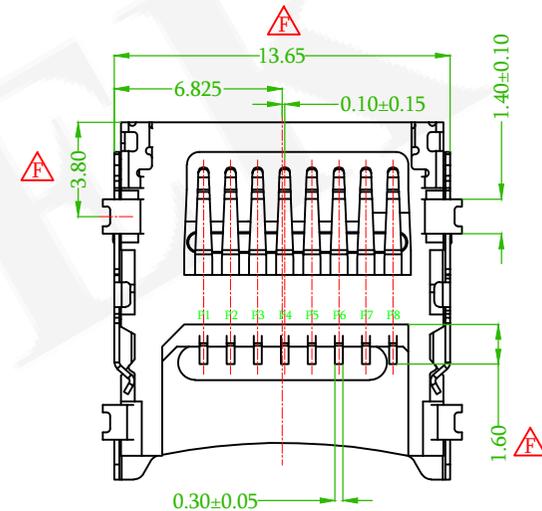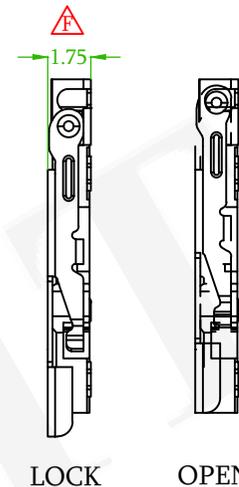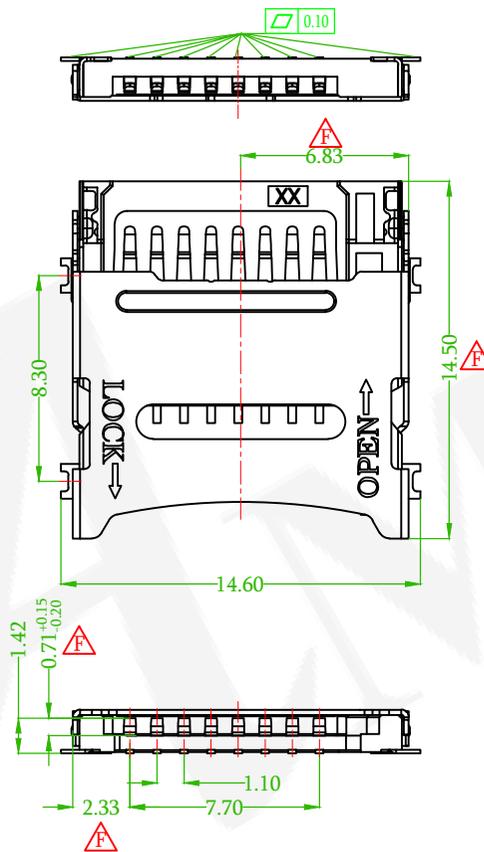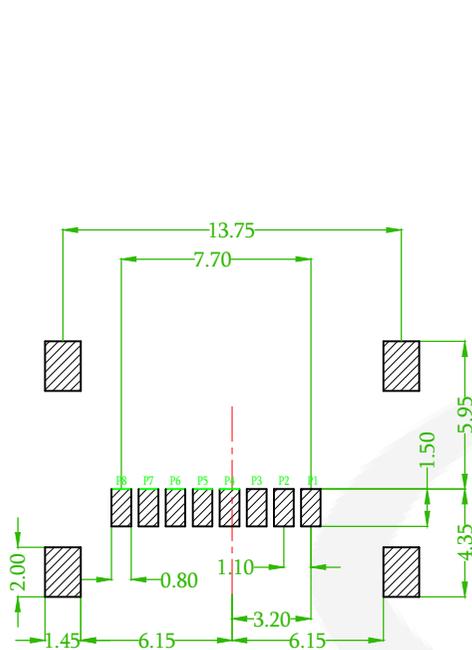

△	ECN NO.:240914 Revise the Drawing	Gaby	2024/10/24
△x6	ECN NO.:230203 Revise the Drawing	Rex	2023/02/14
△x2	QEC NO.:201206 Revise the plated:G0→S0	Alice	2020/12/08
△x1	QEC:191104: Revise the Operation Temperature	David	2019/11/13
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	SIM CARD HINGE TYPE			頁數 Page	1/1
品號 PART NO.	△ 5KTFG-08XXXXL01 △	繪圖 DRAWN	David	2019/10/01	
圖號 DRAWING NO.	GN195-DV338	版本 REV.	F	核對 CHECKED	Josh 2019/10/01
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/10/01
公差 TOLERANCE	△ .X ± 0.38 △ .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	⊕ ↗